




TOOL-FLO



TOOL-FLO
CR-SB75-4E
TF22675 G50

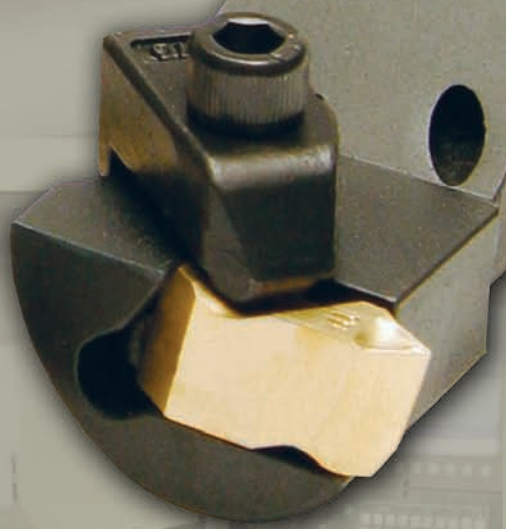

General Catalog

Cutting Tools and Tool Holders

Catalog 60

Providing the World with the Cutting Edge!
for
35 Years!

Building 1 - Main Offices

7803 Hansen Road • Houston, TX 77061


Houses the administration offices and the insert manufacturing facilities.



Building 2 - Engineering/Mill Department

7811 Hansen Road • Houston, TX 77061

Houses the engineering department as well as manufacturing of standard and special tool holders.

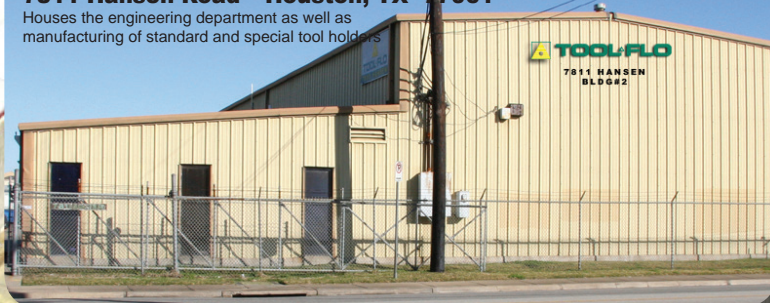

Since 1978 Tool-Flo has been providing quality cutting tools for companies around the world.

Our corporate mission calls for us to achieve and maintain leadership by designing and manufacturing standard and special cutting tools and tool holders that bring our customers an unparalleled level of satisfaction. Tool-Flo's ongoing commitment in pursuit of that goal is to produce "ultimate quality" cutting tools that exceed customer's expectations through meticulous manufacturing and innovative use of the latest state of the art CNC machine tools.

Building 3 - Training Center
8930 Tallyho • Houston, TX 77061

Technical training for end users, distributors and representatives.



Building 4 - Sales/Shipping/Coating
7815 Hansen Road • Houston, TX 77061

Houses the sales, shipping and material preparation departments as well as the coating facilities.





TOOL-FLO


Chipbreakers for chasers



API section page 7/Chaser section pages 67 & 68

with coolant cavity and grooves

Tube scarfing

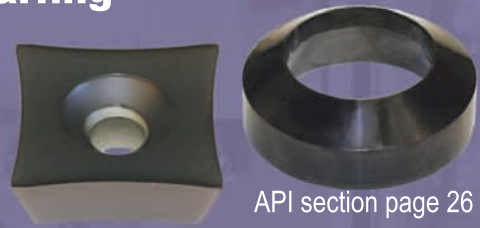

API section page 26

API section page 12

Chip control



API section page 16

API section page 9

8 & 10 round Rotary shoulder connections

Cut off system



Cut off section pages 72-74

Partial Topping Acme Threading




Laydown section page 115

Flo-Lock section page 101

On-Edge section page 148, 149

Coolant through holders/bars

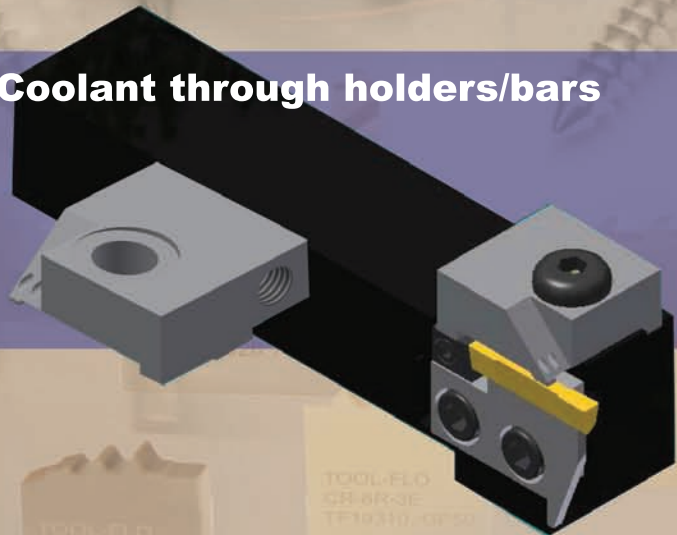

NEW PRODUCTS

INDEX

ALPHABETICAL INDEX. . . . 3

FLO LOCK CROSS REFERENCE. .90

GRADE CHART IBC

INSERTS

ACME THREADING

- Bantam Series BHR4 60
- Flo Lock. 100,101
- LT-Series Laydown115
- L-Series Laydown 129, 130
- On Edge146-148
- Threadmilling 179
- Vee Bottom 210, 219

ACME THREADING (Partial topping)

- Flo-Lock. 101
- LT-Series Laydown115
- On-Edge 148

ACME STUB THREADING

- Bantam Series BHR4 60
- Flo Lock. 100, 101
- LT-Series Laydown115
- L-Series Laydown 130, 131
- On Edge147-149
- Vee Bottom 210, 219

ACME STUB THREADING (Partial topping)

- Flo-Lock. 101
- LT-Series Laydown115
- On-Edge 149

AMERICAN STANDARD BUTTRESS

- Flo Lock. 102
- On Edge 149

API BUTTRESS THREADING

- Chasers 6, 66
- Flo Lock. 8, 102
- LT-Series Laydown10, 116
- L-Series Laydown 14, 131
- On Edge 18, 149, 150
- Vee Bottom 20, 210

API HUGHES H90 THREADING

- L-Series Laydown 14, 131
- On Edge 18, 150
- Vee Bottom 210

API ROTARY SHOULDER

CONNECTION THREADING

- Flo Lock. 8, 103
- LT-Series Laydown12, 116
- L-Series Laydown . 15, 16, 132, 133
- On Edge 19, 150, 151
- Vee Bottom20, 211

API ROUND THREADING

- Chasers 6, 66, 67
- Flo Lock. 8, 9, 103
- LT-Series Laydown 12, 13, 116, 117
- L-Series Laydown . . . 17, 133, 134
- On Edge 19, 151
- Threadmilling 177
- Vee Bottom20, 211

API VAM THREADING

- LT-Series Laydown13, 117
- L-Series Laydown 17, 134
- On Edge 151
- Vee Bottom20, 211

API V0.055 (MT) THREADING

- LT-Series Laydown13, 117

API X-LINE THREADING

- LT-Series Laydown13, 117
- L-Series Laydown 17, 134
- On Edge 152
- Vee Bottom21,212

BALLNOSE

- Finishing 37, 39, 40
- Roughing 37, 39
- Flat Bottom 42, 43
- Back Draft 42, 43

BORING

- Bantam Series49-53

BSPT THREADING

- LT-Series Laydown117
- Threadmilling 174

CUTOFF72-76

DEEP GROOVING

- Flo Lock.84, 86, 96-98
- VDG. 78, 79

FACE GROOVING

- Flo Lock.84, 86, 96-98
- Vee Bottom 86, 87

GROOVING

- Bantam Series53-55
- Flo Lock.91-95, 165
- LT-Series Laydown118
- Milling 61, 143, 181
- On Edge152-154
- Vee Bottom165, 212-214

ISO THREADING

- LT-Series Laydown118, 119
- Threadmilling176-179

KITS .

- Bantam Series 61
- Flo Lock. 99
- Threadmill 181

MILLING 142, 143

NPT THREADING

- Bantam Series 56, 58, 59
- Chasers 7, 67
- Flo Lock 9, 104
- LT-Series Laydown 10, 11, 119, 120
- L-Series Laydown . . . 14, 15, 134
- On Edge 154
- Threadmilling 175, 177
- Threadmilling (Solid) 180
- Vee Bottom 215

NPTF DRYSEAL THREADING

- LT-Series Laydown11, 120
- Threadmilling 175, 177

PITTSBURG ACME

- L-Series Laydown 15, 135

POLY-VEE

- Flo Lock. 33, 107
- PV Series 32

PROFILING 168, 169

RING GROOVERS 21

TRAPEZOIDAL THREADING

- LT-Series Laydown 120

TUBE SCARFING 26

TURNING 161-164, 184-186

UN THREADING

- Bantam Series56-59
- Flo Lock. 105

LT-Series Laydown 121, 122

Threadmilling 175-179

Threadmilling (Solid) 180

UNJ THREADING

Flo Lock 104, 105

LT-Series Laydown 123

Threadmilling 176, 178

V- THREADING

Bantam Series56-60

Flo Lock 106, 107

LT-Series Laydown 123, 124

L-Series Laydown 135

On Edge 154, 155

Vee Bottom 215

WHEEL TURNING

DBV Series 34

WHITWORTH THREADING

LT-Series Laydown 124, 125

BRAZED TOOLS 27, 28

TOOLHOLDERS/BARS

BALLNOSE 38-43

BANTAM SERIES49-61

CHASERS 68, 69

CUT OFF72-76

DEEP GROOVING79-82

FLO LOCK.107-110

GROOVEMILLING. . . 61, 143, 181

LT-SERIES LAYDOWN . . 125, 126

L-SERIES LAYDOWN . . . 136-138

ON EDGE156-158

PROFILING169-172

PV SERIES 33

RING GROOVING. 22

SWISS TOOLING 63, 64

THREADMILLING . . 175, 177, 180

TURNING187-202


VEE BOTTOM.215-220

WHEEL TURNING (DBV) 34

INTERCHANGABLE HEADS. 22-25, 111, 126, 136, 158, 203-206, 220


PARTS. 222-224

TECHNICAL DATA 225-231




API

Inserts.....	6-21
Holders.....	22
Interchangeable Heads.....	22-25
Brazed.....	27,28
Technical.....	29,30




AUTOMOTIVE

Inserts.....	32-34
Holders.....	33,34
Technical.....	34



BALLNOSE

Inserts.....	37-43
Holders.....	38-43
Technical.....	44-46



BANTAM/SWISS TOOLING

Inserts.....	49-61
Holders.....	49-64
Kits.....	61
Technical.....	62



CHASERS

Inserts.....	66-68
Holders.....	68,69
Technical.....	69,70



CUT OFF

Inserts.....	72,74
Holders.....	72-76
Technical.....	76




DEEP GROOVING

Inserts.....	78-80
Holders.....	79-82
Technical.....	82




FACE GROOVING

Inserts.....	64-87
Holders.....	85-87
Technical.....	88



FLO-LOCK

Inserts.....	91-107
Holders.....	107-111
Kits.....	99
Technical.....	99,111,112



LAYDOWN

	LT STYLE	L STYLE
Inserts.....	115-125	130-135
Holders.....	125-126	136-138
Technical.....	127-128	



MEDICAL

General.....	140
--------------	-----



MILLING

Inserts.....	142,143
Groove Milling.....	143
Technical.....	144



ON EDGE

Inserts.....	146-155
Holders.....	156-158



PCBN

Inserts.....	161-165
Technical.....	166



PROFILING

Inserts.....	168,169
Holders.....	169-172



THREADMILLING

Inserts.....	174-179
Holders.....	175,177-180
Kits.....	181
Solids.....	180
Technical.....	182



TURNING

Inserts.....	184-186
Holders.....	187-202
Interchangeable Heads.....	203-206
Technical.....	207,208



VEE BOTTOM

Inserts.....	210-215,219
Holders.....	215-218,220
Interchangeable Heads.....	220






SPARE PARTS

GENERAL TECHNICAL

Parts.....	222-224
Technical.....	225-231



TOOLFLO

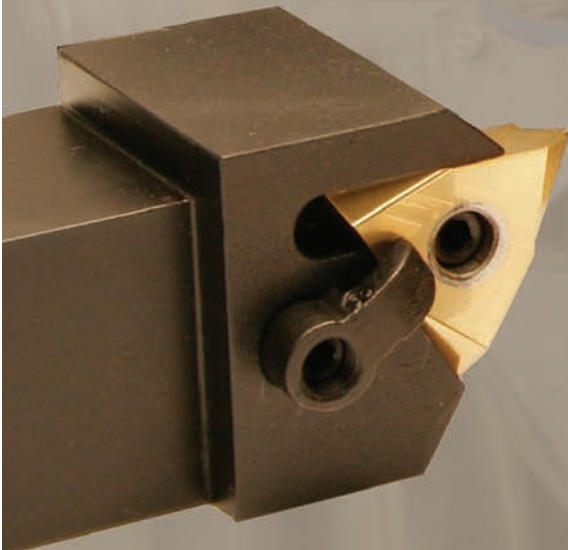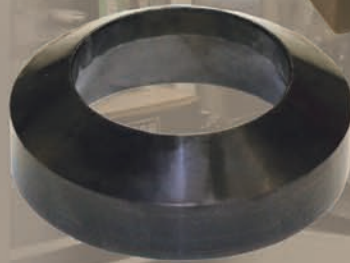


API
Oil & Gas

CHASERS

External API Buttress


■ For holders see pg. 68



Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-5B75-3E #1	M16415188	5	3/4	.670	.573	.205	3	●	●	●	●
CR-5B75-3E #2	M16415189	5	3/4	.670	.582	.205	3	●	●	●	●
CR-5B75-3E #3	M16426149	5	3/4	.670	.590	.205	3	●	●	●	●
CR-5B75-4E	M16422675	5	3/4	.804	.625	.200	4	●	●	●	●
CR-5B1-4E	M1741130	5	1	.800	.640	.200	4	●	●	●	●
CR-8B75-4E	M2145353	8	3/4	.800	.605	.200	4	●	●	●	●

Internal API Buttress


■ For bars see pg. 69



Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-5B75-3I	M1681847	5	3/4	.630	.577	.204	3	●	●	●	●
CR-5B75-4I	M1681347	5	3/4	.800	.582	.205	4	●	●	●	●
CR-5B75-5I	M16815688	5	3/4	1.000	.590	.205	5	●	●	●	●
CR-5B1-3I	M1782052	5	1	.635	.635	.200	3	●	●	●	●
CR-5B1-4I	M1782051	5	1	.800	.640	.200	4	●	●	●	●
CR-8B75-4I	M2185353	8	3/4	.800	.590	.205	4	●	●	●	●

External API Round

■ For holders see pg. 68




Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-8R-3E #1	M32416731	8	3/4	.630	.577	.204	3	●	●	●	●
CR-8R-3E #2	M32416732	8	3/4	.630	.586	.204	3	●	●	●	●
CR-8R-3E #3	M32416733	8	3/4	.630	.591	.204	3	●	●	●	●
CR-8R-3E	M32419310	8	3/4	.630	.592	.204	3	●	●	●	●
CR-8R-4E 6°	M3241136	8	3/4	.640	.625	.200	4	●	●	●	●
CR-8R-4E 12°	M3241163	8	3/4	.635	.625	.200	4	●	●	●	●
CR-10R-3E #1	M34416728	10	3/4	.628	.563	.204	3	●	●	●	●
CR-10R-3E #2	M34416729	10	3/4	.628	.572	.204	3	●	●	●	●
CR-10R-3E #3	M34416730	10	3/4	.628	.575	.204	3	●	●	●	●
CR-10R-3E	M3441291	10	3/4	.630	.625	.204	3	●	●	●	●

External API Round and Buttress Chaser Style

CNGA - Double Sided (2 cutting edges)


■ For holders see pg. 68



Description	EDP Code	TPI	TPF	No. of Teeth				
					G50	GP50	AC3	AC50
CNGA-8R-3E	M32427407	8	3/4	3	●	●	●	●
CNGA-10R-3E	M34427408	10	3/4	3	●	●	●	●
CNGA-5B75-3E	M16427408	5	3/4	3	●	●	●	●

Internal API Round

■ For bars see pg. 69



Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-8R-3I	M3287464	8	3/4	.640	.592	.200	3	●	●	●	●
CR-8R-4I 6°	M3281136	8	3/4	.640	.625	.200	4	●	●	●	●
CR-8R-4I	M32825150	8	3/4	.640	.625	.200	4	●	●	●	●
CR-8R-7I	M32814828	8	3/4	1.000	.625	.200	7	●	●	●	●
CR-8R-7I	M32817968	8	3/4	1.000	.625	.200	7	●	●	●	●
CR-10R-3I	M3481291	10	3/4	.630	.625	.200	3	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


J-Series	▲	●
K-Series	▲	●
L-Series	▲	●
N-Series	●	▲
P-Series	●	▲
Q-Series	●	●



CHASERS

External LPT/NPT

■ For holders see pg. 68




	CVD Coated	TiN Coated	AlTiN* Coated
G50	●	●	●
GP50	●	●	●
AC3	●	●	●
AC50	●	●	●

Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth
CR-8NPT-4E	M3648996	8	3/4	.625	.620	.203	4
CR-11.5NPT-4E	M3649668	11.5	3/4	.625	.620	.1875	4

Internal LPT/NPT


■ For bars see pg. 69



Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth
CR-8NPT-4I	M3689804	8	3/4	.625	.620	.2030	4
CR-11.5NPT-4I	M3689804	11.5	3/4	.625	.620	.1875	4
CR-8NPT-7I	M3689804	8	3/4	.625	.620	.1875	7

CHIPBREAKERS

External




Description	EDP Code	L	A	T	Inserts
CR-5B75/5B1-4E-CB	TF2993	.800	.500	.125	CR-5B75-4E/CR-5B1-4E
CR-8R/10R-3E/4E-CB	TF1353E	.630	.460	.125	CR-8R-3E/CR-8R-4E/CR-10R-3E/CR-8NPT-4E
#3 CB W/O COOLANT GROOVES .170	TF26424	.618	.460	.170	CR-8R-3E/CR-8R-4E/CR-10R-3E/CR-8NPT-4E

External

with coolant grooves

Also available at -.010, -.020 and -.030 off the A dimension.




Description	EDP Code	L	A	T	Coolant Grooves	Inserts
TD4601 5B75-1-CB	TF16660	.665	.550	.170	✓	CR-5B75-3E #1
TD4602 5B75-2-CB	TF16661	.668	.550	.170	✓	CR-5B75-3E #2
TD4603 5B75-3-CB	TF16662	.665	.560	.170	✓	CR-5B75-3E #3
TD3931 8R-1-CB	TF16657	.628	.518	.165	✓	CR-8R-3E #1
TD3932 8R-2-CB	TF16658	.635	.526	.165	✓	CR-8R-3E #2
TD3933 8R-3-CB	TF27129	.628	.520	.165	✓	CR-8R-3E #3
TA2237 10R-1-CB	TF16760	.628	.503	.175	✓	CR-10R-3E #1
TA2238 10R-2-CB	TF16761	.628	.512	.175	✓	CR-10R-3E #2
TA2239 10R-3-CB	TF16762	.628	.515	.175	✓	CR-10R-3E #3
#3 CB W/COOLANT GROOVES .170	TF26423	.618	.460	.170	✓	CR-8R-3E

External


with coolant grooves and cavity

Also available at -.010, -.020 and -.030 off the A dimension.



Description	EDP Code	L	A	T	Coolant Grooves	Inserts
TD4601 5B75-1-CB W/CAVITY	TF30297	.665	.550	.170	✓	CR-5B75-3E #1
TD4602 5B75-2-CB W/CAVITY	TF30298	.668	.550	.170	✓	CR-5B75-3E #2
TD4603 5B75-3-CB W/CAVITY	TF30299	.665	.560	.170	✓	CR-5B75-3E #3
TD3931 8R-1-CB W/CAVITY	TF28130	.628	.518	.165	✓	CR-8R-3E #1
TD3932 8R-2-CB W/CAVITY	TF28131	.635	.526	.165	✓	CR-8R-3E #2
TD3933 8R-3-CB W/CAVITY	TF28132	.628	.520	.165	✓	CR-8R-3E #3

Internal




Description	EDP Code	L	A	T	Coolant Grooves	Inserts
CR-5B75/5B1-4I-CB	TF16104	.800	.500	.125		CR-5B75-4I/CR-5B1-4I
CR-8R/10R-3I/4I-CB	TF1353I	.630	.488	.125		CR-8R-3I/CR-8R-4I/CR-10R-3I/CR-8LPT-4I
CR-5B75-5I-CB	TF28765	1.000	.540	.125	✓	CR-5B75-5I
CR-8R-7I-CB	TF3435	1.000	.520	.125		CR-8R-7I
CR-8R-7I-CB	TF18096	1.000	.510	.125	✓	CR-8R-7I




FLO-LOCK

API Buttress Threading

■ For holders and bars see pgs. 107-109




RH Shown



Description	EDP Code	TPI	TPF	T	A	B	Gage Dia.	Coating						
								C3	GP3	GP50	AC3	AC50		
FLDC-3-5B75E	553616E	5	3/4	.250	.344	.4026	.3750							
FLDC-3-5B75I	553616I	5	3/4	.250	.344	.4026	.3750			●				
FLDC-3-5B1E	553617E	5	1	.250	.344	.4026	.3750			●				
FLDC-3-5B1I	553617I	5	1	.250	.344	.4026	.3750			●				
FLDC-4-5B75E	554616E	5	3/4	.255	.453	.6320	.3750			●				
FLDC-4-5B75I	554616I	5	3/4	.255	.453	.6320	.3750			●				
FLDC-4-5B1E	554617E	5	1	.255	.453	.6320	.3750			●				
FLDC-4-5B1I	554617I	5	1	.255	.453	.6320	.3750			●				

API Threading Non-Topping

■ For holders and bars see pgs. 107-109




RH Shown



Description	EDP Code	TPI	R	T	E	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLD-3038R	553438R	4	.033/.038	.195	.082	.344	.3991	.3750			●			
FLD-3038L	553438L	4	.033/.038	.195	.082	.344	.3991	.3750			●			
FLD-3040R	553440R	5	.015/.020	.195	.082	.344	.3991	.3750			●			
FLD-3040L	553440L	5	.015/.020	.195	.082	.344	.3991	.3750			●			
FLD-4038R	554438R	4	.033/.038	.255	.128	.453	.6293	.3750			●			
FLD-4038L	554438L	4	.033/.038	.255	.128	.453	.6293	.3750			●			
FLD-4040R	554440R	5	.015/.020	.255	.128	.453	.6293	.3750			●			
FLD-4040L	554440L	5	.015/.020	.255	.128	.453	.6293	.3750			●			
FLD-4050R	554450R	4	.020/.025	.255	.128	.453	.6293	.3750			●			
FLD-4050L	554450L	4	.020/.025	.255	.128	.453	.6293	.3750			●			

API Rotary Shoulder Connexion Threading

■ For holders and bars see pgs. 107-109




RH Shown



Description	EDP Code	TPI	TPF	T	E	A	B	Gage Dia.	Conn. No. or Size	Coating				
										GP3	GP50	AC22	AC3	AC50
FLDC-3-530E	553613E	5	3	.250	.147	.344	.4026	.3750	3-1/2 FH, 2-3/8-4-1/2 Reg.		●			
FLDC-3-530I	553613I	5	3	.250	.147	.344	.4026	.3750	3-1/2 FH, 2-3/8-4-1/2 Reg.		●			
FLDC-4-425E	554609E	4	2	.312	.183	.453	.6320	.3750	5-1/2 FH, 6-5/8 FH & Reg.		●			
FLDC-4-425I	554609I	4	2	.312	.183	.453	.6320	.3750	5-1/2 FH, 6-5/8 FH & Reg.		●			
FLDC-4-428E	554610E	4	2	.312	.183	.453	.6320	.3750	NC23-NC50, 2-3/8-5-1/2IF		●	●		●
FLDC-4-428I	554610I	4	2	.312	.183	.453	.6320	.3750	NC23-NC50, 2-3/8-5-1/2IF		●	●		●
FLDC-4-435E	554611E	4	3	.312	.183	.453	.6320	.3750	5-1/2, 7-5/8, 8-5/8 Reg.		●			
FLDC-4-435I	554611I	4	3	.312	.183	.453	.6320	.3750	5-1/2, 7-5/8, 8-5/8 Reg.		●			
FLDC-4-438E	554612E	4	3	.312	.183	.453	.6320	.3750	NC56 - NC71		●			
FLDC-4-438I	554612I	4	3	.312	.183	.453	.6320	.3750	NC56 - NC71		●			

API Round Threading

■ For holders and bars see pgs. 107-109



RH Shown



Description	EDP Code	TPI	TPF	T	E	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLDC-3-8RDR75	553632R	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	
FLDC-3-8RDL75	553632L	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	
FLDC-3-10RDR75	553634R	10	3/4	.195	.125	.344	.4010	.3750			●	●	●	
FLDC-3-10RDL75	553634L	10	3/4	.195	.125	.344	.4010	.3750			●	●	●	

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	GP3	GP50	AC3	AC50
Cast Iron					
Non-Ferrous					
Stainless/High Temp					
Steel				▲	





FLO-LOCK

API Round Threading with Chipbreaker

Exclusive patented design!



■ For holders and bars see pgs. 107-109

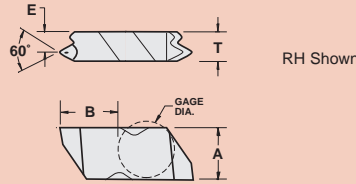

Description	EDP Code	TPI	TPF	T	E	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLDC-3-8RDR75-CB	553632PR	8	3/4	.195	.125	.344	.4010	.3750			●	●	●
FLDC-3-8RDL75-CB	553632PL	8	3/4	.195	.125	.344	.4010	.3750			●	●	●

API Round Threading Multi-Tooth


■ For holders and bars see pgs. 107-109

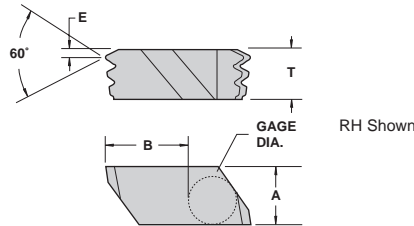

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLDC-6-8RDR-75M	5566323R	8	3/4	.070	.383	.453	.636	.3750			●	●	●
FLDC-6-10RDR-75M	556634R	10	3/4	.184	.383	.453	.636	.3750			●	●	●

NPT Threading


■ For holders and bars see pgs. 107-109

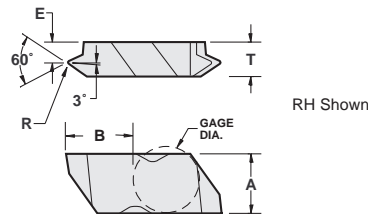

Description	EDP Code	TPI	TPF	T	E	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLDC-38VR-75	553608R	8	3/4	.195	.100	.344	.4000	.3750		●	●	●	●
FLDC-38VL-75	553608L	8	3/4	.195	.100	.344	.4000	.3750		●	●	●	●
FLDC-3115VR-75	553611R	11.5	3/4	.195	.144	.344	.4000	.3750		●	●	●	●
FLDC-3115VL-75	553611L	11.5	3/4	.195	.144	.344	.4000	.3750		●	●	●	●
FLDC-314VR-75	553614R	14	3/4	.195	.148	.344	.4023	.3750		●	●	●	●
FLDC-314VL-75	553614L	14	3/4	.195	.148	.344	.4023	.3750		●	●	●	●
FLDC-318VR-75	553618R	18	3/4	.195	.154	.344	.4023	.3750		●	●	●	●
FLDC-318VL-75	553618L	18	3/4	.195	.154	.344	.4023	.3750		●	●	●	●
FLDC-327VR-75	553627R	27	3/4	.195	.162	.344	.4023	.3750	●		●	●	●
FLDC-327VL-75	553627L	27	3/4	.195	.162	.344	.4023	.3750	●		●	●	●

NPT Threading Multi-Tooth

■ For holders and bars see pgs. 107-109

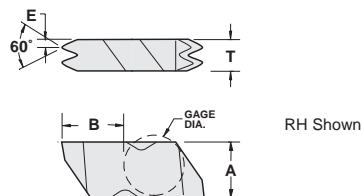

Description	EDP Code	TPI	TPF	T	E	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLDC-3-8 NPT-2E	553708E	8	3/4	.250	.058	.344	.4050	.3750			●	●	●
FLDC-3-8 NPT-2I	553708I	8	3/4	.250	.058	.344	.4050	.3750			●	●	●
FLDC-3-11.5 NPT-2E	553711E	11.5	3/4	.250	.048	.344	.4050	.3750			●	●	●
FLDC-3-11.5 NPT-2I	553711I	11.5	3/4	.250	.048	.344	.4050	.3750			●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron			▲		●
Non-Ferrous			▲		●
Stainless/High Temp			▲		●
Steel			▲		●



LAYDOWN-LT

API Buttress Threading

■ For holders and bars see pgs. 125-126

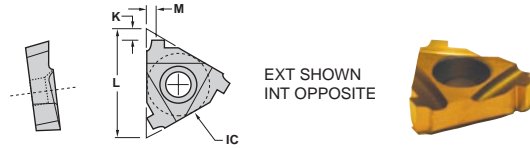


Description	EDP Code	TPI	TPF	IC	L	M	K	Connection	Coating					
									C22	GP22	GP50	AC22	AC50	
22ER 8B75	5102100	8	3/4	1/2	.87	.102	.073	U.S. Improved Buttress		●	●	●	●	●
22ER 5B75	5101600	5	3/4	1/2	.87	.087	.087	4-1/2 - 13-3/8		●	●	●	●	●
22ER 5B1	5101700	5	1	1/2	.87	.095	.087	16 and larger		●	●	●	●	●
22NR 8B75	5122100	8	3/4	1/2	.87	.102	.073	U.S. Improved Buttress			●	●	●	●
22NR 5B75	5121600	5	3/4	1/2	.87	.087	.087	4-1/2 - 13-3/8			●	●	●	●
22NR 5B1	5121700	5	1	1/2	.87	.095	.090	16 and larger			●	●	●	●

NPT Threading with Chipbreaker

Exclusive patented design!


■ For holders and bars see pgs. 125-126

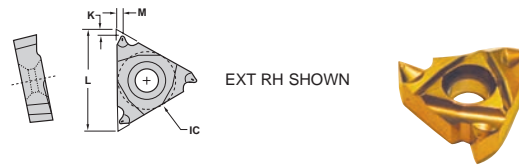

Description	EDP Code	TPI	IC	L	M	K	Coating					
							C22	GP22	GP50	AC22	AC50	
16ER 27NPT-CB	5003627P	27	3/8	.65	.03	.02		●	●	●	●	●
16ER 18NPT-CB	5003618P	18	3/8	.65	.03	.02		●	●	●	●	●
16ER 14NPT-CB	5003614P	14	3/8	.65	.06	.04		●	●	●	●	●
16ER 11.5NPT-CB	5003611P	11.5	3/8	.65	.06	.04		●	●	●	●	●
16ER 8NPT-CB	5003608P	8	3/8	.65	.06	.04		●	●	●	●	●
16NR 27NPT-CB	5023627P	27	3/8	.65	.03	.02		●	●	●	●	●
16NR 18NPT-CB	5023618P	18	3/8	.65	.03	.02		●	●	●	●	●
16NR 14NPT-CB	5023614P	14	3/8	.65	.06	.04		●	●	●	●	●
16NR 11.5NPT-CB	5023611P	11.5	3/8	.65	.06	.04		●	●	●	●	●
16NR 8NPT-CB	5023608P	8	3/8	.65	.06	.04		●	●	●	●	●

NPT Threading

■ For holders and bars see pgs. 125-126

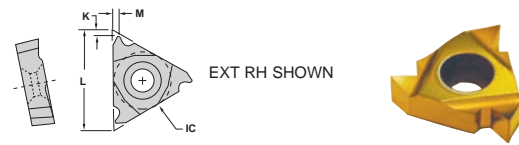

Description	EDP Code	TPI	IC	L	M	K	Coating					
							C22	GP22	GP50	AC22	AC50	
16ER 27NPT	5003627	27	3/8	.65	.03	.03		●	●	●	●	●
16EL 27NPT	5043627	27	3/8	.65	.03	.03		●	●	●	●	●
16ER 18NPT	5003618	18	3/8	.65	.04	.03		●	●	●	●	●
16EL 18NPT	5043618	18	3/8	.65	.04	.03		●	●	●	●	●
16ER 14NPT	5003614	14	3/8	.65	.05	.04		●	●	●	●	●
16EL 14NPT	5043614	14	3/8	.65	.05	.04		●	●	●	●	●
16ER 11.5NPT	5003611	11.5	3/8	.65	.06	.04		●	●	●	●	●
16EL 11.5NPT	5043611	11.5	3/8	.65	.06	.04		●	●	●	●	●
16ER 8NPT	5003608	8	3/8	.65	.07	.05		●	●	●	●	●
16EL 8NPT	5043608	8	3/8	.65	.07	.05		●	●	●	●	●
11NR 18NPT	4923618	18	1/4	.43	.04	.03		●	●	●	●	●
11NR 27NPT	4923627	27	1/4	.43	.03	.03		●	●	●	●	●
16NR 27NPT	5023627	27	3/8	.65	.03	.03		●	●	●	●	●
16NL 27NPT	5063627	27	3/8	.65	.03	.03		●	●	●	●	●
16NR 18NPT	5023618	18	3/8	.65	.04	.03		●	●	●	●	●
16NL 18NPT	5063618	18	3/8	.65	.04	.03		●	●	●	●	●
16NR 14NPT	5023614	14	3/8	.65	.05	.04		●	●	●	●	●
16NL 14NPT	5063614	14	3/8	.65	.05	.04		●	●	●	●	●
16NR 11.5NPT	5023611	11.5	3/8	.65	.06	.04		●	●	●	●	●
16NL 11.5NPT	5063611	11.5	3/8	.65	.06	.04		●	●	●	●	●
16NR 8NPT	5023608	8	3/8	.65	.06	.05		●	●	●	●	●
16NL 8NPT	5063608	8	3/8	.65	.06	.05		●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.



Material	Uncoated	TIN Coated	AITIN Coated
Cast Iron		▲	●
Non-Ferrous			●
Stainless/High Temp		▲	●
Steel		▲	●



LAYDOWN-LT

NPT Threading Multi-Tooth

■ For holders and bars see pgs. 125-126

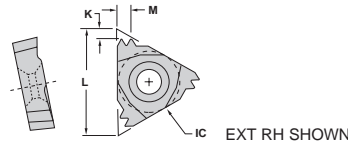


Description	EDP Code	No of Teeth	TPI	IC	L	M	K	Coating						
								GP22	GP25	GP50	GP54	AC22	AC50	
22ER 11.5NPT2M	5103811	2	11.5	1/2	.87	.13	.09	●					●	●
27ER 11.5NPT3M	5203811	3	11.5	5/8	1.08	.22	.14		●				●	●
27ER 8NPT2M	5203808	2	8	5/8	1.08	.19	.11		●				●	●
22NR 11.5NPT2M	5123811	2	11.5	1/2	.87	.13	.09	●	●	●	●	●	●	●
27NR 11.5NPT3M	5223811	3	11.5	5/8	1.08	.22	.14		●				●	●
27NR 8NPT2M	5223808	2	8	5/8	1.08	.19	.11		●				●	●

NPTF Threading Chipbreaker

For Dry Seal listing see page

Exclusive patented design!


■ For holders and bars see pgs. 125-126

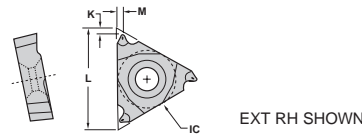

Description	EDP Code	TPI	IC	L	M	K	Coating						
							C22	GP22	GP50	AC22	AC50		
16ER 27NPTF-CB	5004027P	27	3/8	.65	.03	.03		●					
16ER 18NPTF-CB	5004018P	18	3/8	.65	.04	.03		●					
16ER 14NPTF-CB	5004014P	14	3/8	.65	.05	.04		●					
16ER 11.5NPTF-CB	5004011P	11.5	3/8	.65	.06	.04		●					
16ER 8NPTF-CB	5004008P	8	3/8	.65	.07	.05		●					
16NR 27NPTF--CB	5024027P	27	3/8	.65	.03	.03		●					
16NR 18NPTF-CB	5024018P	18	3/8	.65	.03	.02		●					
16NR 14NPTF-CB	5024014P	14	3/8	.65	.06	.04		●					
16NR 11.5NPTF-CB	5024011P	11.5	3/8	.65	.06	.04		●					
16NR 8NPTF-CB	5024008P	8	3/8	.65	.06	.04		●					

NPTF Threading

■ For holders and bars see pgs. 125-126



Description	EDP Code	TPI	IC	L	M	K	Coating						
							C22	GP22	GP50	AC22	AC50		
16ER 27NPTF	5004027	27	3/8	.65	.03	.03		●					
16EL 27NPTF	5044027	27	3/8	.65	.03	.03		●					
16ER 18NPTF	5004018	18	3/8	.65	.04	.03		●					
16EL 18NPTF	5044018	18	3/8	.65	.04	.03		●					
16ER 14NPTF	5004014	14	3/8	.65	.05	.04		●					
16EL 14NPTF	5044014	14	3/8	.65	.05	.04		●					
16ER 11.5NPTF	5004011	11.5	3/8	.65	.06	.04		●					
16EL 11.5NPTF	5044011	11.5	3/8	.65	.06	.04		●					
16ER 8NPTF	5004008	8	3/8	.65	.07	.05		●					
16EL 8NPTF	5044008	8	3/8	.65	.07	.05		●					
11NR 27NPTF	4923827	27	1/4	.43	.03	.03		●					
11NR 18NPTF	4924018	18	1/4	.43	.04	.03		●		●			
16NR 27NPTF	5024027	27	3/8	.65	.03	.03		●					
16NL 27NPTF	5064027	27	3/8	.65	.03	.03		●					
16NR 18NPTF	5024018	18	3/8	.65	.04	.03		●					
16NL 18NPTF	5064018	18	3/8	.65	.04	.03		●					
16NR 14NPTF	5024014	14	3/8	.65	.05	.04		●					
16NL 14NPTF	5064014	14	3/8	.65	.05	.04		●					
16NR 11.5NPTF	5024011	11.5	3/8	.65	.06	.04		●					
16NL 11.5NPTF	5064011	11.5	3/8	.65	.06	.04		●					
16NR 8NPTF	5024008	8	3/8	.65	.07	.05		●					
16NL 8NPTF	5064008	8	3/8	.65	.07	.05		●					

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Material	GP22	GP50	AC22	AC50
Cast Iron		▲		●
Non-Ferrous		▲		●
Stainless/High Temp		▲		●
Steel				●




LAYDOWN-LT

API Rotary Shoulder Connection Threading

■ For holders and bars see pgs. 125-126



EXT SHOWN
INT OPPOSITE




Description	EDP Code	TPI	TPF	IC	L	M	K	Connection	Coating				
									C22	GP22	GP50	AC22	AC50
22ER 530	5101300	5	3	1/2	.87	.10	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.					
22ER 4PAC	5101500	4	1-1/2	1/2	.87	.11	.08	American Open Hole					
22ER 438	5101200	4	3	1/2	.87	.11	.11	NC56 - NC71					
22ER 435	5101100	4	3	1/2	.87	.11	.08	5-1/2, 7-5/8, 8-5/8 Reg.					
22ER 42F	5101400	4	2	1/2	.87	.11	.08	VO.065*					
22ER 428	5101000	4	2	1/2	.87	.10	.08	NC23-NC50, 2-3/8 - 5-1/2IF					
22ER 425	5100900	4	2	1/2	.87	.10	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.					
22NR 530	5121300	5	3	1/2	.87	.10	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.					
22NR 4PAC	5121500	4	1-1/2	1/2	.87	.11	.08	American Open Hole					
22NR 438	5121200	4	3	1/2	.87	.11	.11	NC56 - NC71					
22NR 435	5121100	4	3	1/2	.87	.11	.08	5-1/2, 7-5/8, 8-5/8 Reg.					
22NR 42F	5121400	4	2	1/2	.87	.11	.08	VO.065*					
22NR 428	5121000	4	2	1/2	.87	.10	.08	NC23-NC50, 2-3/8 - 5-1/2IF					
22NR 425	5120900	4	2	1/2	.87	.10	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.					
27ER 530	5201300	5	3	5/8	.108	.11	.07	3-1/2FH, 2-3/8, 4-1/2 Reg.					
27ER 438	5201200	4	3	5/8	.108	.11	.08	NC56 - NC71					
27ER 435	5201100	4	3	5/8	.108	.12	.08	5-1/2, 7-5/8, 8-5/8 Reg.					
27ER 428	5201000	4	2	5/8	.108	.11	.08	NC23-NC50, 2-3/8 - 5-1/2IF					
27ER 425	5200900	4	2	5/8	.108	.12	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.					
27NR 530	5221300	5	3	5/8	.108	.11	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.					
27NR 438	5221200	4	3	5/8	.108	.11	.08	NC56 - NC71					
27NR 435	5221100	4	3	5/8	.108	.12	.08	5-1/2, 7-5/8, 8-5/8 Reg.					
27NR 428	5221000	4	2	5/8	.108	.11	.08	NC23-NC50, 2-3/8 - 5-1/2IF					
27NR 425	5220900	4	2	5/8	.108	.12	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.					


* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API Round Threading Chipbreaker

■ For holders and bars see pgs. 125-126




EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	IC	L	M	K	Coating				
							GP22	GP50	AC22	AC3	AC50
16ER 8RD-CB	5003200HC	8	3/8	.65	.051	.059					
16ER 10RD-CB	5003400HC	10	3/8	.65	.047	.059					
16NR 8RD-CB	5023200HC	8	3/8	.65	.051	.059					
16NR 10RD-CB	5023400HC	10	3/8	.65	.047	.059					

API Round Threading

■ For holders and bars see pgs. 125-126



EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	TPF	IC	L	M	K	Coating				
								C22	GP22	GP50	AC22	AC50
16ER 8RD	5003200	8	3/4	3/8	.65	.059	.056					
16ER 10RD	5003400	10	3/4	3/8	.65	.059	.056					
22ER 8RD	5103200	8	3/4	1/2	.87	.060	.056					
22ER 10RD	5103400	10	3/4	1/2	.87	.046	.048					
16NR 8RD	5023200	8	3/4	3/8	.65	.059	.056					
16NR 10RD	5023400	10	3/4	3/8	.65	.059	.056					
22NR 8RD	5123200	8	3/4	1/2	.87	.060	.056					
22NR 10RD	5123400	10	3/4	1/2	.87	.046	.048					

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


Material	Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
Coating	▲	▲	▲	▲



LAYDOWN-LT

API Round Threading Multi-Tooth

■ For holders and bars see pgs. 125-126



EXT SHOWN
INT OPPOSITE




Description	EDP Code	TPI	IC	L	M	K	Coating								
							C22	GP22	GP50	AC22	AC50				
22ER 10RD2M	5103500	10	1/2	.87	.146	.094									
27ER 8RD2M	5203300	8	5/8	1.08	.177	.114									
22NR 10RD2M	5123500	10	1/2	.87	.146	.094									
27NR 8RD2M	5223300	8	5/8	1.08	.177	.114									

API VO.055

American MT, AMT & AMMT*

■ For holders and bars see pgs. 125-126



EXT SHOWN
INT OPPOSITE




Description	EDP Code	TPI	TPF	IC	L	M	K	Connection	Coating					
									C22	GP22	GP50	AC22	AC50	
16ER 6P VO.055 MT	5004300	6	1-1/2	3/8	.65	.059	.051	NC10-NC16, VO.055, 1, 1-1/2 REG						
22ER 6P VO.055 MT	5104300	6	1-1/2	1/2	.87	.072	.060	NC10-NC16, VO.055, 1, 1-1/2 REG						
16NR 6P VO.055 MT	5024300	6	1-1/2	3/8	.65	.059	.051	NC10-NC16, VO.055, 1, 1-1/2 REG						
22NR 6P VO.055 MT	5124300	6	1-1/2	1/2	.87	.072	.060	NC10-NC16, VO.055, 1, 1-1/2 REG						


* MT is Macaroni Tubing, AMT is American Macaroni Tubing and AMMT is American Mining Macaroni Tubing.

API VAM Threading

■ For holders and bars see pgs. 125-126




EXT SHOWN
INT OPPOSITE




Description	EDP Code	TPI	IC	L	M	K	Coating						
							C22	GP22	GP50	AC22	AC50		
22ER 8VAM	5102500	8	1/2	.87	.059	.059							
22ER 6VAM	5102400	6	1/2	.87	.079	.079							
22ER 5VAM	5102300	5	1/2	.87	.079	.079							
22NR 8VAM	5122500	8	1/2	.87	.059	.059							
22NR 6VAM	5122400	6	1/2	.87	.079	.079							
22NR 5VAM	5122300	5	1/2	.87	.079	.079							

API X-Line Threading

■ For holders and bars see pgs. 125-126



EXT RH SHOWN



Description	EDP Code	TPI	TPF	IC	L	M	K	Connection	Coating				
									C22	GP22	GP50	AC22	AC50
22ER 6XL75	5102000	6	3/4	1/2	.87	.075	.078						
22ER 6XL15	5101900	6	1-1/2	1/2	.87	.075	.086	5 - 7-5/8					
22ER 5XL12	5101800	5	1-1/4	1/2	.87	.087	.083	8-5/8 - 10-3/4					
22NR 6XL75	5122000	6	3/4	1/2	.87	.075	.078						
22NR 6XL15	5121900	6	1-1/2	1/2	.87	.075	.086	5 - 7-5/8					
22NR 5XL12	5121800	5	1-1/4	1/2	.87	.087	.083	8-5/8 - 10-3/4					

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


Material	C22	GP22	GP50	AC22	AC50
Cast Iron					●
Non-Ferrous					●
Stainless/High Temp					●
Steel				▲	●



LAYDOWN

API Buttress Threading

■ For holders and bars see pgs. 136-138

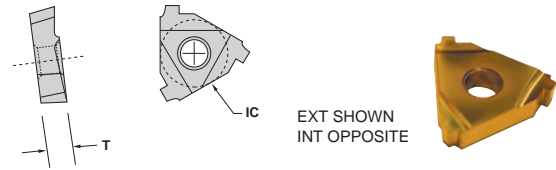


Description	EDP Code	TPI	TPF	IC	T	Connection	Coating				
							C6H	GP50	GP54	AC50	AC54
L43 5B75 EXT-FC	16154F	5	3/4	.500	.189	4-1/2 - 13-3/8	●	●	●	●	●
L43 5B1 EXT-FC	17514F	5	1	.500	.189	16 and larger	●	●	●	●	●
L43 8B75 EXT-FC	21154F	8	3/4	.500	.189	US Improved Buttress	●	●	●	●	●
L53 5B75 EXT-FC	16474F	5	3/4	.625	.189	4-1/2 - 13-3/8	●	●	●	●	●
L53 5B1 EXT-FC	17474F	5	1	.625	.189	16 and larger	●	●	●	●	●
L53 8B75 EXT-FC	21474F	8	3/4	.625	.189	US Improved Buttress	●	●	●	●	●
L43 5B75 INT-FC	16158F	5	3/4	.500	.189	4-1/2 - 13-3/8	●	●	●	●	●
L43 5B1 INT-FC	17518F	5	1	.500	.189	16 and larger	●	●	●	●	●
L43 8B75 INT-FC	21158F	8	3/4	.500	.189	US Improved Buttress	●	●	●	●	●
L53 5B75 INT-FC	16478F	5	3/4	.625	.189	4-1/2 - 13-3/8	●	●	●	●	●
L53 5B1 INT-FC	17478F	5	1	.625	.189	16 and larger	●	●	●	●	●
L53 8B75 INT-FC	21478F	8	3/4	.625	.189	US Improved Buttress	●	●	●	●	●

FC designates 5° flank clearance

API Hughes H90 Threading


■ For holders and bars see pgs. 136-138

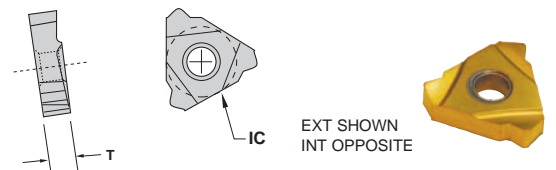

Description	EDP Code	TPI	TPF	IC	T	Connection	Coating				
							C6H	GP50	GP54	AC50	AC54
L53 H902 EXT	28474	3-1/2	2	.625	.189	3-1/2 - 6-5/8 H90	●	●	●	●	●
L53 H903 EXT	29474	3-1/2	3	.625	.189	7 - 8-5/8 H90	●	●	●	●	●
L53 H90S EXT	27474	3	1-1/4	.625	.189	2-3/8 - 3-1/2 Slimline	●	●	●	●	●
L53 H902 INT	28478	3-1/2	2	.625	.189	3-1/2 - 6-5/8 H90	●	●	●	●	●
L53 H903 INT	29478	3-1/2	3	.625	.189	7 - 8-5/8 H90	●	●	●	●	●
L53 H90S INT	27478	3	1-1/4	.625	.189	2-3/8 - 3-1/2 Slimline	●	●	●	●	●

API Hughes H90 Threading LDS Double Sided Internal/External


■ For holders and bars see pgs. 136-138

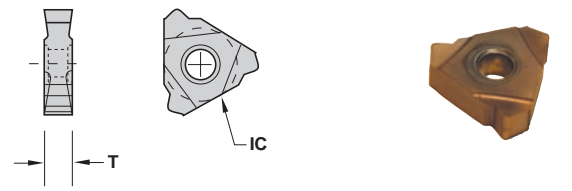

Description	EDP Code	TPI	TPF	IC	T	Connection	Coating				
							C6H	GP50	GP54	AC50	AC54
LDS 54 H902	28490	3-1/2	2	.625	.252	3-1/2 - 6-5/8 H90	●	●	●	●	●
LDS 54 H903	29490	3-1/2	3	.625	.252	7 - 8-5/8 H90	●	●	●	●	●
LDS 54 H90S	27490	3	1-1/4	.625	.252	2-3/8 - 3-1/2 Slimline	●	●	●	●	●

NPT Threading

■ For holders and bars see pgs. 136-138

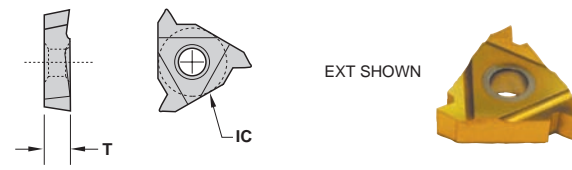

Description	EDP Code	TPI	TPF	IC	T	Coating				
						C22	GP22	GP50	AC22	AC50
L43 8NPT EXT	3615084	8	3/4	.500	.189	●	●	●	●	●
L43 11.5NPT EXT	3615114	11.5	3/4	.500	.189	●	●	●	●	●
L43 8NPT INT	3615088	8	3/4	.500	.189	●	●	●	●	●
L43 11.5NPT INT	3615118	11.5	3/4	.500	.189	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


Material	Uncoated	TIN Coated	AlTiN Coated
Cast Iron	▲	●	●
Non-Ferrous	▲	●	●
Stainless/High Temp	▲	●	●
Steel	▲	●	●



LAYDOWN-LT

NPT Threading Multi-Tooth


■ For holders and bars see pgs. 136-138



Description	EDP Code	TPI	TPF	IC	T	Coatings				
						C22	GP22	GP50	AC22	AC50
L43 11.5NPT2M EXT	3615114T	11.5	3/4	.500	.189				●	
L43 11.5NPT2M INT	3615118T	11.5	3/4	.500	.189			●	●	●

NPT Threading LDS Double Sided Internal/External


■ For holders and bars see pgs. 136-138

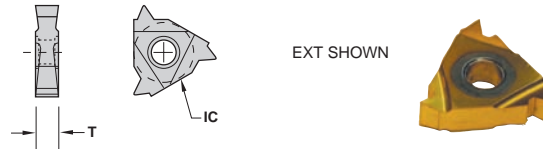

Description	EDP Code	TPI	TPF	IC	T	Coatings				
						C22	GP22	GP50	GP54	AC22
LDS 43 8NPT	361808	8	3/4	.500	.189					
LDS 43 11.5NPT	361811	11.5	3/4	.500	.189				●	
LDS 43 14NPT	361814	14	3/4	.500	.189				●	

Pittsburg Acme Threading


■ For holders and bars see pgs. 136-138

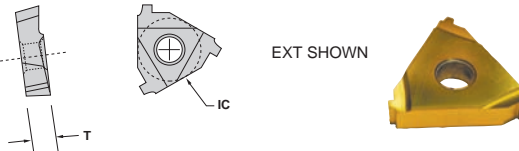

Description	EDP Code	TPI	TPF	IC	T	Coatings				
						C22	GP22	GP50	GP54	AC22
L43 8PA75 EXT	22154	8	3/4	.500	.189					
L53 8PA75 EXT	22474	8	3/4	.625	.189				●	
L43 8PA75 INT	22158	8	3/4	.500	.189				●	
L53 8PA75 INT	22478	8	3/4	.625	.189				●	

API Rotary Shoulder Connection Threading

■ For holders and bars see pgs. 136-138

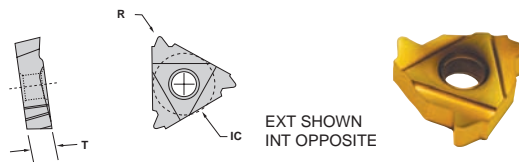

Description	EDP Code	TPI	TPF	R	IC	T	Connection	Coatings				
								GP50	GP54	AC22	AC50	AC54
L43 425 EXT	09154	4	2	.025	.500	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●				
L43 428 EXT	10154	4	2	.038	.500	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●				
L43 42F EXT*	14154	4	2	---	.500	.189	V0.065*					
L43 435 EXT	11154	4	3	.025	.500	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●				
L43 438 EXT	12154	4	3	.038	.500	.189	NC56 - NC71	●				
L43 530 EXT	13154	5	3	.020	.500	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●				
L43 4PAC EXT	15154	4	1-1/2	---	.500	.189	American Open Hole	●				
L53 425 EXT	09474	4	2	.025	.625	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●				
L53 428 EXT	10474	4	2	.038	.625	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●				
L53 42F EXT*	14474	4	2	---	.625	.189	V0.065*					
L53 435 EXT	11474	4	3	.025	.625	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●				
L53 438 EXT	12474	4	3	.038	.625	.189	NC56 - NC71	●				
L53 530 EXT	13474	5	3	.020	.625	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●				
L53 4PAC EXT	15474	4	1-1/2	---	.625	.189	American Open Hole	●				
L43 425 INT	09158	4	2	.025	.500	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●				
L43 428 INT	10158	4	2	.038	.500	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●				
L43 42F INT*	14158	4	2	---	.500	.189	V0.065*					
L43 435 INT	11158	4	3	.025	.500	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●				
L43 438 INT	12158	4	3	.038	.500	.189	NC56 - NC71	●				
L43 530 INT	13158	5	3	.020	.500	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●				
L43 4PAC INT	15158	4	1-1/2	---	.500	.189	American Open Hole	●				
L53 425 INT	09478	4	2	.025	.625	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●				
L53 428 INT	10478	4	2	.038	.625	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●				
L53 42F INT*	14478	4	2	---	.625	.189	V0.065*					
L53 435 INT	11478	4	3	.025	.625	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●				
L53 438 INT	12478	4	3	.038	.625	.189	NC56 - NC71	●				
L53 530 INT	13478	5	3	.020	.625	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●				
L53 4PAC INT	15478	4	1-1/2	---	.625	.189	American Open Hole	●				

* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	GP50	GP54	AC22	AC50	AC54
Cast Iron					●
Non-Ferrous					●
Stainless/High Temp					●
Steel			▲	▲	




LAYDOWN

API Rotary Shoulder Connection Threading

LDS Double Sided
Lead Follow Topping
Internal/External
with patented chipbreaker

Exclusive patented design!

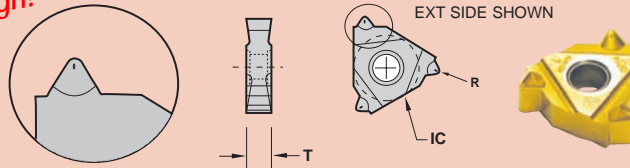


■ For holders and bars see pgs. 136-138

Description	EDP Code	TPI	TPF	R	IC	T	Connection	Coating					
								Uncoated	TIN Coated	AlTiN Coated	C6H	GP54	AC22
LDS 54 428-CB #1	10490HC	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438-CB #2	12490HC	4	3	.038	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425-CB #3	09490HC	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435-CB #4	11490HC	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530-CB #5	13490HC	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●

API Rotary Shoulder Connection Threading

LDS Double Sided
Follow Topping
Internal/External
with patented chipbreaker

Exclusive patented design!

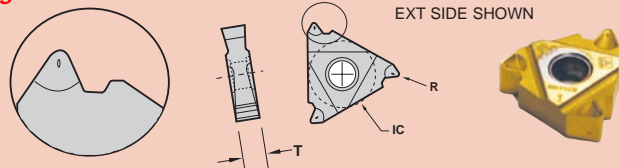


■ For holders and bars see pgs. 136-138

Description	EDP Code	TPI	TPF	R	IC	T	Connection	Coating					
								TIN Coated	AlTiN Coated	GP50	GP54	AC22	AC50
LDS 54 428 FT-CB #1	10495HC	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438 FT-CB #2	12495HC	4	3	.038	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425 FT-CB #3	09495HC	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435 FT-CB #4	11495HC	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530 FT-CB #5	13495HC	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●

API Rotary Shoulder Connection Threading

LDS Double Sided
Lead Follow Topping
Internal/External

■ For holders and bars see pgs. 136-138

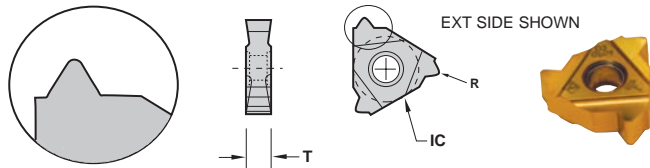


Description	EDP Code	TPI	TPF	R	IC	T	Connection	Coating					
								Uncoated	TIN Coated	AlTiN Coated	C6H	GP54	AC22
LDS 54 428 #1	10490	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438 #2	12490	4	3	.038	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425 #3	09490	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435 #4	11490	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530 #5	13490	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●
LDS 54 42F	14490	4	2	---	.625	.252	V0.065*		●	●	●	●	●
LDS 54 4PAC	15490	4	1-1/2	---	.625	.252	American Open Hole		●	●	●	●	●

* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API Rotary Shoulder Connection Threading

LDS Double Sided
Follow Topping
Internal/External

■ For holders and bars see pgs. 136-138

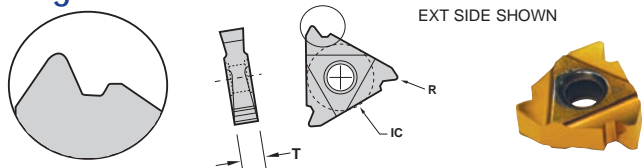

Description	EDP Code	TPI	TPF	R	IC	T	Connection	Coating					
								TIN Coated	AlTiN Coated	GP50	GP54	AC22	AC50
LDS 54 428 #1-FT	10495	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438 #2-FT	12495	4	3	.038	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425 #3-FT	09495	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435 #4-FT	11495	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530 #5-FT	13495	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●
LDS 54 42F-FT	11495	4	2	---	.625	.252	V0.065*		●	●	●	●	●
LDS 54 4PAC-FT	15495	4	1-1/2	---	.625	.252	American Open Hole		●	●	●	●	●

* Obsolete thread form - see API Spec 7, 35th Edition, May 1, 1985 Section 9.4.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
●	●	●	●
●	●	●	●
●	●	●	●
●	●	●	●



LAYDOWN

API Round Threading

■ For holders and bars see pgs. 136-138



Description	EDP Code	TPI	TPF	IC	T	TIN Coated		AIIIN Coated		
						GP50	GP54	AC22	AC50	AC54
L43 8RD EXT	32154	8	3/4	.500	.189	●	●	●	●	●
L43 10RD EXT	34154	10	3/4	.500	.189	●	●	●	●	●
L53 8RD EXT	32474	8	3/4	.625	.189	●	●	●	●	●
L43 8RD INT	32158	8	3/4	.500	.189	●	●	●	●	●
L43 10RD INT	34158	10	3/4	.500	.189	●	●	●	●	●
L53 8RD INT	32478	8	3/4	.625	.189	●	●	●	●	●

API Round Threading

LDS Double Sided Internal/External

■ For holders and bars see pgs. 136-138




Description	EDP Code	TPI	TPF	IC	T	TIN Coated		AIIIN Coated		
						GP50	GP54	AC22	AC50	AC54
LDS 43 8RD	32180	8	3/4	.500	.189	●	●	●	●	●
LDS 43 10RD	34180	10	3/4	.500	.189	●	●	●	●	●
LDS 54 8RD	32490	8	3/4	.625	.252	●	●	●	●	●
LDS 54 10RD	34490	10	3/4	.625	.252	●	●	●	●	●

API Round Threading

Double Sided Internal/External


■ For holders and bars see pgs. 136-138

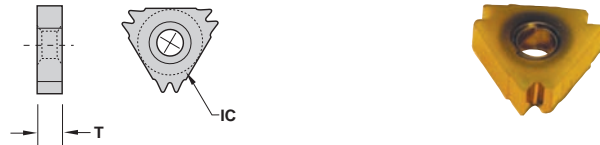

Description	EDP Code	TPI	TPF	IC	T	Uncoated		TIN Coated		AIIIN Coated
						C6H	GP50	GP54	AC50	AC54
TNFA 43 8RD	32N70	8	3/4	.500	.187	●	●	●	●	●

API VAM Threading


■ For holders and bars see pgs. 136-138

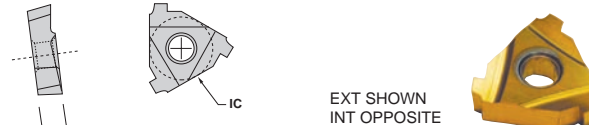

Description	EDP Code	TPI	TPF	IC	T	Uncoated		TIN Coated		AIIIN Coated
						C6H	GP50	GP54	AC50	AC54
L43 5VAM EXT	23154	5	3/4	.500	.189	●	●	●	●	●
L43 6VAM EXT	24154	6	3/4	.500	.189	●	●	●	●	●
L43 8VAM EXT	25154	8	3/4	.500	.189	●	●	●	●	●
L43 5VAM INT	23158	5	3/4	.500	.189	●	●	●	●	●
L43 6VAM INT	24158	6	3/4	.500	.189	●	●	●	●	●
L43 8VAM INT	25158	8	3/4	.500	.189	●	●	●	●	●

API X-Line Threading

■ For holders and bars see pgs. 136-138

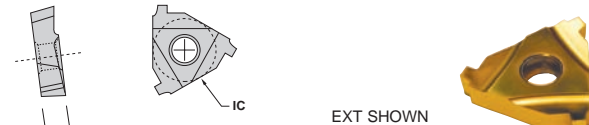

Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		AIIIN Coated
							C6H	GP50	GP54	AC50	AC54
L43 6XL15 EXT	19154	6	1-1/2	.500	.189	5 - 7-5/8	●	●	●	●	●
L43 6XL75 EXT	20154	6	3/4	.500	.189	-	●	●	●	●	●
L43 5XL12 EXT	18154	5	1-1/4	.500	.189	8-5/8 - 10-3/4	●	●	●	●	●
L53 6XL15 EXT	19474	6	1-1/2	.625	.252	5 - 7-5/8	●	●	●	●	●
L53 6XL75 EXT	20474	6	3/4	.625	.252	-	●	●	●	●	●
L53 5XL12 EXT	18474	5	1-1/4	.625	.252	8-5/8 - 10-3/4	●	●	●	●	●
L43 6XL15 INT	19158	6	1-1/2	.500	.189	5 - 7-5/8	●	●	●	●	●
L43 6XL75 INT	20158	6	3/4	.500	.189	-	●	●	●	●	●
L43 5XL12 INT	18158	5	1-1/4	.500	.189	8-5/8 - 10-3/4	●	●	●	●	●
L53 6XL15 INT	19478	6	1-1/2	.625	.252	5 - 7-5/8	●	●	●	●	●
L53 6XL75 INT	20478	6	3/4	.625	.252	-	●	●	●	●	●
L53 5XL12 INT	18478	5	1-1/4	.625	.252	8-5/8 - 10-3/4	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.



- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C6H	GP50	GP54	AC50	AC54
Cast Iron				●	●
Non-Ferrous				●	●
Stainless/High Temp				●	●
Steel	▲	▲		●	●


ON-EDGE

API Buttress Threading

Straight Hole



EXT SHOWN
INT OPPOSITE





■ For holders and bars see pgs. 156-158

Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		A/TIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 43 8B75 EXT	23194	8	3/4	.500	.189	U.S. Improved Buttress				●		
TNMA 44 5B75 EXT	16434	5	3/4	.500	.252	4-1/2 - 13-3/8				●		
TNMA 54 5B1 EXT -FC*	17514F	5	1	.625	.252	16 and larger				●		●
TNMA 54 5B75 EXT-FC	16514F	5	3/4	.625	.252	4-1/2 - 13-3/8				●		●
TNMA 43 8B75 INT	23198	8	3/4	.500	.189	U.S. Improved Buttress				●		
TNMA 44 5B75 INT	16438	5	3/4	.500	.252	4-1/2 - 13-3/8				●		●
TNMA 54 5B1 INT-FC	17518F	5	1	.625	.252	16 and larger				●		●
TNMA 54 5B75 INT-FC	16518F	5	3/4	.625	.252	4-1/2 - 13-3/8				●		●


*FC indicates 5° flank clearance

API Buttress Threading

Countersink Hole



EXT SHOWN
INT OPPOSITE



■ For holders and bars see pgs. 156-158



Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		A/TIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMC 43 8B75 EXT	21414	8	3/4	.500	.189	U.S. Improved Buttress				●		
TNMC 54 5B75 EXT-FC*	16534F	5	3/4	.625	.252	4-1/2 - 13-3/8				●		●
TNMC 54 5B1 EXT-FC	17534F	5	1	.625	.252	16 and larger				●		●
TNMC 43 8B75 INT	21418	8	3/4	.500	.189	U.S. Improved Buttress				●		●
TNMC 54 5B75 INT-FC	16538F	5	3/4	.625	.252	4-1/2 - 13-3/8				●		●
TNMC 54 5B1 INT-FC	17538F	5	1	.625	.252	16 and larger				●		●

*FC indicates 5° flank clearance


API Hughes H90 Threading

Straight Hole

■ For holders and bars see pgs. 156-158



EXT SHOWN
INT OPPOSITE





Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		A/TIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 55 H902 EXT	28554	3-1/2	2	.625	.314	3-1/2 - 6-5/8 H90				●		
TNMA 55 H903 EXT	29554	3-1/2	3	.625	.314	7 - 8-5/8 H90				●		
TNMA 56 H90S EXT	27Q14	3	1-1/4	.625	.377	2-3/8 - 3-1/2 Slimline				●		
TNMA 55 H902 INT	28558	3-1/2	2	.625	.314	3-1/2 - 6-5/8 H90				●		
TNMA 55 H903 INT	29558	3-1/2	3	.625	.314	7 - 8-5/8 H90				●		
TNMA 56 H90S INT	27Q18	3	1-1/4	.625	.377	2-3/8 - 3-1/2 Slimline				●		


API Hughes H90 Threading

Countersink Hole

■ For holders and bars see pgs. 156-158



EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		A/TIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMC 55 H902 EXT	28564	3-1/2	2	.625	.314	3-1/2 - 6-5/8 H90				●		
TNMC 55 H903 EXT	29564	3-1/2	3	.625	.314	7 - 8-5/8 H90				●		
TNMC 56 H90S EXT	27Q34	3	1-1/4	.625	.377	2-3/8 - 3-1/2 Slimline				●		
TNMC 55 H902 INT	28568	3-1/2	2	.625	.314	3-1/2 - 6-5/8 H90				●		
TNMC 55 H903 INT	29568	3-1/2	3	.625	.314	7 - 8-5/8 H90				●		
TNMC 56 H90S INT	27Q38	3	1-1/4	.625	.377	2-3/8 - 3-1/2 Slimline				●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel




API

API


ON-EDGE API Rotary Shoulder Connection Threading

Straight Hole

■ For holders and bars see pgs. 156-158



EXT SHOWN
INT OPPOSITE





Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		AITIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 54 530 EXT	13514	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMA 55 425 EXT	09554	4	2	.625	.314	5-1/2 FH 6-5/8 FH 6-5/8 Reg.					●	●
TNMA 55 428 EXT	10554	4	2	.625	.314	NC 23-NC50 2-3/8 - 5-1/2 IF					●	●
TNMA 55 42F EXT	14554	4	2	.625	.314	V0.065*					●	●
TNMA 55 435 EXT	11554	4	3	.625	.314	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.					●	●
TNMA 55 438 EXT	12554	4	3	.625	.314	NC56-NC71					●	●
TNMA 55 530 EXT	13554	5	3	.625	.314	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMA 55 4PAC EXT	15554	4	1-1/2	.625	.314	American Open Hole					●	●
TNMA 54 530 INT	13518	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMA 55 425 INT	09558	4	2	.625	.314	5-1/2 FH 6-5/8 FH 6-5/8 Reg.					●	●
TNMA 55 428 INT	10558	4	2	.625	.314	NC 23-NC50 2-3/8 - 5-1/2 IF					●	●
TNMA 55 42F INT	14558	4	2	.625	.314	V0.065*					●	●
TNMA 55 435 INT	11558	4	3	.625	.314	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.					●	●
TNMA 55 438 INT	12558	4	3	.625	.314	NC56-NC71					●	●
TNMA 55 530 INT	13558	5	3	.625	.314	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMA 55 4PAC INT	15558	4	1-1/2	.625	.314	American Open Hole					●	●

*Obsolescent thread form - see API Spec 7, 35th Edition, May 1, 1985 Section 9.4.

API Round Threading

Straight Hole

■ For holders and bars see pgs. 156-158



INT SHOWN
EXT OPPOSITE





Description	EDP Code	TPI	TPF	IC	T	Uncoated		TIN Coated		AITIN Coated	
						C3	GP3	GP50	AC22	AC3	AC50
TNMA 43 8RD EXT	32394	8	3/4	.500	.189					●	●
TNMA 43 10RD EXT	34394	10	3/4	.500	.189					●	●
TNMA 54 8RD EXT	32514	8	3/4	.625	.252					●	●
TNMA 43 8RD INT	32398	8	3/4	.500	.189					●	●
TNMA 43 10RD INT	34398	10	3/4	.500	.189					●	●
TNMA 54 8RD INT	32518	8	3/4	.625	.252					●	●

API Round Threading

Countersink Hole

■ For holders and bars see pgs. 156-158



INT SHOWN
EXT OPPOSITE





Description	EDP Code	TPI	TPF	IC	T	Uncoated		TIN Coated		AITIN Coated	
						C3	GP3	GP50	AC22	AC3	AC50
TNMC 43 8RD EXT	32414	8	3/4	.500	.189					●	●
TNMC 43 10RD EXT	34414	10	3/4	.500	.189					●	●
TNMC 54 8RD EXT	32534	8	3/4	.625	.252					●	●
TNMC 43 8RD INT	32418	8	3/4	.500	.189					●	●
TNMC 43 10RD INT	34418	10	3/4	.500	.189					●	●
TNMC 54 8RD INT	32538	8	3/4	.625	.252					●	●

API Rotary Shoulder Connection Threading

Countersink Hole

■ For holders and bars see pgs. 156-158



EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	TPF	IC	T	Connection	Uncoated		TIN Coated		AITIN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMC 54 530 EXT	13534	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMC 55 425 EXT	09564	4	2	.625	.312	5-1/2 FH 6-5/8 FH 6-5/8 Reg.					●	●
TNMC 55 428 EXT	10564	4	2	.625	.312	NC 23-NC50 2-3/8 - 5-1/2 IF					●	●
TNMC 55 42F EXT*	14564	4	2	.625	.312	V0.065*					●	●
TNMC 55 435 EXT	11564	4	3	.625	.312	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.					●	●
TNMC 55 438 EXT	12564	4	3	.625	.312	NC56-NC71					●	●
TNMC 55 530 EXT	13564	5	3	.625	.312	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMC 55 4PAC EXT	15564	4	1-1/2	.625	.312	American Open Hole					●	●
TNMC 54 530 INT	13538	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMC 55 425 INT	09568	4	2	.625	.312	5-1/2 FH 6-5/8 FH 6-5/8 Reg.					●	●
TNMC 55 428 INT	10568	4	2	.625	.312	NC 23-NC50 2-3/8 - 5-1/2 IF					●	●
TNMC 55 42F INT*	14568	4	2	.625	.312	V0.065*					●	●
TNMC 55 435 INT	11568	4	3	.625	.312	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.					●	●
TNMC 55 438 INT	12568	4	3	.625	.312	NC56-NC71					●	●
TNMC 55 530 INT	13568	5	3	.625	.312	3-1/2 FH 2-3/8 - 4-1/2 Reg.					●	●
TNMC 55 4PAC INT	15568	4	1-1/2	.625	.312	American Open Hole					●	●

*Obsolescent thread form - see API Spec 7, 35th Edition, May 1, 1985 Section 9.4.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron												●
Non-Ferrous												●
Stainless/High Temp												●
Steel											▲	●

VEE-BOTTOM API Buttress Threading



■ For holders and bars see pgs. 215-218



EXT SHOWN
INT OPPOSITE



Uncoated		TIN Coated		A1TIN Coated	
C3	C6H	GP3	GP50	AC3	AC50
			●		
			●		
			●		
			●		
			●		

Description	EDP Code	TPI	TPF	T	L	H	Connection
V84 5B75 EXT-FC*	16614F	5	3/4	.250	1.000	.250	4-1/2 - 13-3/8
V84 5B1 EXT-FC	17614F	5	1	.250	1.000	.250	16 AND LARGER
V84 8B75 EXT-FC	21614F	8	3/4	.250	1.000	.250	U.S. IMPROVED BUTTRESS
V84 5B75 INT-FC	16618F	5	3/4	.250	1.000	.250	4-1/2 - 13-3/8
V84 5B1 INT-FC	17618F	5	1	.250	1.000	.250	16 AND LARGER
V84 8B75 INT-FC	21618F	8	3/4	.250	1.000	.250	U.S. IMPROVED BUTTRESS

*FC indicates 5° flank clearance

API Rotary Shoulder Connection Threading

■ For holders and bars see pgs. 215-218



EXT SHOWN
INT OPPOSITE



Uncoated		TIN Coated		A1TIN Coated	
C3	C6H	GP3	GP50	AC3	AC50
			●	●	●
			●	●	●
			●	●	●
			●	●	●
			●	●	●

Description	EDP Code	TPI	TPF	T	L	H	Connection
V85 425 EXT	09634	4	2	.312	1.000	.250	5-1/2 - 6-5/8 FH, 6-5/8 REG
V85 428 EXT	10634	4	2	.312	1.000	.250	NC23 - 50, 2-3/8 - 5-1/2 IF
V85 42F EXT*	14634	4	2	.312	1.000	.250	VO.065*
V85 435 EXT	11634	4	3	.312	1.000	.250	5-1/2 REG, 7-5/8 REG, 8-5/8 REG
V85 438 EXT	12634	4	3	.312	1.000	.250	NC56 - NC71
V85 530 EXT	13634	5	3	.312	1.000	.250	3-1/2FH, 2-3/8 - 4-1/2 REG
V85 4PAC EXT	15634	4	1-1/2	.312	1.000	.250	American Open Hole
V85 425 INT	09638	4	2	.312	1.000	.250	5-1/2 - 6-5/8 FH, 6-5/8 REG
V85 428 INT	10638	4	2	.312	1.000	.250	NC23 - 50, 2-3/8 - 5-1/2 IF
V85 42F INT*	14638	4	2	.312	1.000	.250	VO.065*
V85 435 INT	11638	4	3	.312	1.000	.250	5-1/2 REG, 7-5/8 REG, 8-5/8 REG
V85 438 INT	12638	4	3	.312	1.000	.250	NC56 - NC71
V85 530 INT	13638	5	3	.312	1.000	.250	3-1/2FH, 2-3/8 - 4-1/2 REG
V85 4PAC INT	15638	4	1-1/2	.312	1.000	.250	American Open Hole

* Obsolete thread form, - See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API Round Threading

■ For holders and bars see pgs. 215-218




EXT SHOWN
INT OPPOSITE

Uncoated		TIN Coated		A1TIN Coated	
C3	C6H	GP3	GP50	AC3	AC50
			●	●	●
			●	●	●
			●	●	●

Description	EDP Code	TPI	TPF	T	L	H
V84 10RD EXT	34614		10	3/4	1.000	.250
V84 10RD INT	34618		10	3/4	1.000	.250
V84 8RD EXT	32614		8	3/4	1.000	.250
V84 8RD INT	32618		8	3/4	1.000	.250

API VAM Threading

■ For holders and bars see pgs. 215-218



EXT SHOWN
INT OPPOSITE

Uncoated		TIN Coated		A1TIN Coated	
C3	C6H	GP3	GP50	AC3	AC50
			●		
			●		
			●		
			●		
			●		

Description	EDP Code	TPI	TPF	T	L	H
V84 5 VAM EXT	23614		5	3/4	1.000	.250
V84 5 VAM INT	23618		5	3/4	1.000	.250
V84 6 VAM EXT	24614		6	3/4	1.000	.250
V84 6 VAM INT	24618		6	3/4	1.000	.250
V84 8 VAM EXT	25614		8	3/4	1.000	.250
V84 8 VAM INT	25618		8	3/4	1.000	.250

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron						●
Non-Ferrous						●
Stainless/High Temp						●
Steel				▲		●




VEE-BOTTOM API X-LINE THREADING

■ For holders and bars see pgs. 215-218



EXT SHOWN
INT OPPOSITE





Description	EDP Code	TPI	TPF	T	L	H	Connection	C3	CGH	GP3	GP50	AC3	AC50
V84 5XL12 EXT	18614	5	1-1/4	.250	1.000	.250	8-5/8 - 10-3/4				●		●
V84 5XL12 INT	18618	5	1-1/4	.250	1.000	.250	8-5/8 - 10-3/4				●		●
V84 6XL15 EXT	19614	6	1-1/2	.250	1.000	.250	5 - 7-5/8				●		●
V84 6XL15 INT	19618	6	1-1/2	.250	1.000	.250	5 - 7-5/8				●		●
V84 6XL75 EXT	20614	6	3/4	.250	1.000	.250	-				●		●
V84 6XL75 INT	20618	6	3/4	.250	1.000	.250	-				●		●

API 46° RING GROOVERS

APIP

■ For holders see pg. 22



Description	EDP Code	R	W	P	T	L	D	Style	CGH	GP25	GP6	AC25	AC6
APIP 086-3	754000	.015	.079	.372	.187	3/4	-	Clamp	●				●
APIP 131-3	754005	.031	.125	.407	.187	3/4	-	Clamp	●				●
APIP (PGN-1A)	754003	.031	.131	.414	.187	3/4	-	Clamp	●				●
APIP 162-3 (PGN-6A)	75403	.031	.156	.437	.187	3/4	-	Clamp	●				●
APIP (PGN-7A)	75887	.031	.203	.484	.187	3/4	-	Clamp	●				●
APIP 203-3 (PGN-2A)	75413	.031	.197	.574	.187	1"	-	Clamp	●				●
APIP 203-3H	75413H	.031	.197	.574	.187	1"	.203	Lock Pin			●	●	●
APIP 213-3	75423	.062	.206	.574	.187	1"	.203	Lock Pin	●				●
APIP 265-3	75433	.031	.260	.633	.187	1"	.250	Lock Pin			●	●	●
APIP 281-3	75443	.031	.277	.645	.187	1"	.250	Lock Pin			●	●	●
APIP 300-3	75463	.031	.295	.662	.187	1"	.250	Lock Pin			●	●	●
APIP 329-3	75473	.031	.324	.683	.187	1"	.250	Lock Pin			●	●	●
APIP 355-3	75476	.031	.350	.712	.187	1"	.250	Lock Pin			●	●	●
APIP 420-3	75490	.031	.415	.772	.187	1"	.250	Lock Pin	●				●

HEAVY DUTY


APIP 284-3	75753	.062	.278	.713	.187	1-3/16	.250	Lock Pin			●	●	●
APIP 162-4NL	75404NL	.031	.156	.733	.250	1-1/2	.250	Lock Pin	●		●	●	●
APIP 162-4 (Counter sink hole)	75404	.031	.156	.733	.250	1-1/2	.250	Screw	●		●	●	●
APIP 203-4NL	75414NL	.031	.197	.773	.250	1-1/2	.250	Lock Pin	●		●	●	●
APIP 203-4 (Counter sink hole)	75414	.031	.197	.773	.250	1-1/2	.250	Screw	●		●	●	●
APIP 213-4 (Counter sink hole)	75424	.062	.206	.773	.250	1-1/2	.250	Screw	●		●	●	●
APIP 265-4 (Counter sink hole)	75436	.031	.260	.773	.250	1-3/8	.250	Screw			●	●	●
APIP 281-4 (Counter sink hole)	75444	.031	.277	.773	.250	1-5/16	.250	Screw			●	●	●
APIP 300-4 (Counter sink hole)	75464	.031	.295	.773	.250	1-9/32	.250	Screw			●	●	●
APIP 329-4	75474	.031	.324	.773	.250	1-7/32	.250	Lock Pin			●	●	●
APIP 355-4	75484	.031	.350	.773	.250	1-5/32	.250	Lock Pin			●	●	●
APIP 420-4	75492	.031	.415	.773	.250	1"	.250	Lock Pin	●				●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	CGH	GP25	GP6	AC25	AC6
Cast Iron					
Non-Ferrous					
Stainless/High Temp					
Steel			▲		●

RING GROOVE SPECIFICATIONS




Groove Description	C	E	N	R	Insert Description
BX-150	.260	.220	.450	.031	APIP 265-3 or APIP 265-4
BX-151	.277	.220	.466	.031	APIP 281-3 or APIP 281-4
BX-152	.295	.230	.498	.031	APIP 300-3 or APIP 300-4
BX-153	.324	.270	.554	.031	APIP 329-3 or APIP 329-4
BX-154	.350	.300	.606	.031	APIP 355-3 or APIP 355-4
BX-155	.415	.330	.698	.031	APIP 420-3 or APIP 420-4
R19, 20, 22, 25, 29, 33, 36, 40, 43, 48, 52, 56, 59, 64, 68, 72, 76 & RX-20	.125	.250	.344	.031	APIP 131-3
R21, 23, 24, 26, 27, 30, 31, 34, 35, 37, 39, 41, 44, 45, 49, 53, 57, 61, 65, 69, 82, 84, 92, 99 & RX-215	.197	.310	.469	.031	APIP 203-3, 203-3H, 203-4
R28, 32, 46, 73 & 85	.206	.380	.531	.062	APIP 213-4
R38, 50, 54, 62, 66, 77, 86 & 87	.278	.440	.656	.062	APIP 213-4, 284-3
R42, 47, 70, 74, 83, 88, 89 & 93	.350	.500	.781	.062	APIP 213-4
R51, 58 & 90	.422	.560	.906	.062	APIP 213-4
RX-201 & 205	.079	.160	.219	.015	APIP 086-3
RX-210	.156	.250	.375	.031	APIP 162-3, PGN-1A

RING GROOVING HOLDERS

FGNR

Most holders and bars available with coolant port
(ie: Add CP to end of description)

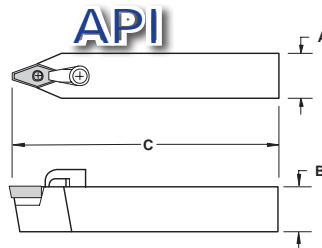

RH SHOWN


PARTS

Description	EDP Code	Insert	A	B	C	Seat/Insert		Clamp	Clamp Screw
						Seat	Screw		
FGNR 16-0863	92801600	APIP 086-3	1	1	6	-	-	TC-311	STC-8
FGNR-16-1A/1313	92801604	PGN 1A/131/3	1	1	6	FGS1A	SF10	TC-311	XNS-510
FGNR-16-2A*	92801612	PGN 2A/213-3	1	1	6	FGS2ANL	S46	TC-311	STC-4
FGNR-20-2A*	92802012	PGN 2A/213-3	1-1/4	1-1/4	7	FGS2ANL	S46	TC-311	STC-4
FGNR 16-6A	92801606	PGN 6A	1	1	6	-	-	CL-30	STC-4
FGNR-16-7A	92801615	PGN 7A	1	1	6	-	-	CL-30	STC-4
FGNR-20-1624	92802013	APIP 162-4	1-1/4	1-1/4	7	-	SD-3	CL-30	XNS-510
FGNR-24-1624	92802413	APIP 162-4	1-1/2	1-1/2	7	-	SD-3	CL-30	XNS-510
FGNR-20-2034	92802014	APIP 203-4	1-1/4	1-1/4	7	-	SD-3	CL-30	XNS-510
FGNR-24-2034	92802414	APIP 203-4	1-1/2	1-1/2	7	-	SD-3	CL-30	XNS-510
FGNR-20-2134	92802015	APIP 213-4	1-1/4	1-1/4	7	-	SD-3	CL-30	XNS-510
FGNR-20-2654	92802016	APIP 265-4	1-1/4	1-1/4	7	-	SD-3	CL-30	STC-4
FGNR-20-2814	92802811	APIP 281-4	1-1/4	1-1/4	7	-	SD-3	CL-30	STC-4
FGNR-20-3004	92802034	APIP 300-4	1-1/4	1-1/4	7	-	SD-3	CL-30	STC-4
FGNR-20-4203	92802019	APIP 420-3	1-1/4	1-1/4	7	-	NL-56	CL-30	STC-4

* Holder can be used with APIP 203-3H (w/whole) insert. Order NL-46 lock pin to replace the S46 seat screw.

INTERCHANGEABLE HEADS FLO-LOCK

H-FLEL/R*




RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS	
							Clamp	Clamp Screw
H20-FLER3W	93502016W	FL-3L	1.250	1.625	0.875	1.750	TF-73	S-412
H24-FLER3W	93502416W	FL-3L	1.500	1.625	1.000	2.000	TF-73	S-412
H28-FLER3W	93502816E	FL-3L	1.750	1.625	1.125	2.250	TF-73	S-412
H32-FLER3W	93503216W	FL-3L	2.000	1.625	1.250	2.500	TF-73	S-412
H40-FLER3W	93504016W	FL-3L	2.500	1.625	1.500	3.000	TF-73	S-412
H28-FLER4W	93502820W	FL-4L	1.750	1.625	1.250	2.250	TF-73	S-412
H32-FLER4W	93503220W	FL-4L	2.000	1.625	1.375	2.500	TF-73	S-412
H36-FLER4W	93503620W	FL-4L	2.250	1.625	1.500	2.500	TF-73	S-412
H40-FLER4W	93504020W	FL-4L	2.500	1.625	1.625	3.000	TF-73	S-412
H28-FLER6W	93502828W	FL-6L	1.750	1.625	1.250	2.500	TF-121	S-412
H32-FLER6W	93503228W	FL-6L	2.000	1.625	1.375	2.750	TF-121	S-412
H40-FLER6W	93504028W	FL-6L	2.500	1.625	1.625	3.250	TF-121	S-412

*Left hand quoted on request.

HS-FLEL/R*

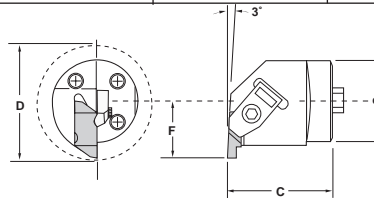

RH SHOWN

PARTS


Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS	
							Clamp	Clamp Screw
HS32-FLER3W	9IHS65032M16	FL-3L	1.25	1.34	0.866	1.730	TF-73	S-412
HS40-FLER3W	9IHS65040M16	FL-3L	1.57	1.58	1.102	2.210	TF-73	S-412
HS50-FLER3W	9IHS65050M16	FL-3L	1.97	1.65	1.380	2.760	TF-73	S-412
HS60-FLER3W	9IHS65060M16	FL-3L	2.36	1.75	1.740	3.480	TF-73	S-412
HS50-FLER4W	9IHS65050M20	FL-4L	1.97	1.65	1.380	2.760	TF-73	S-412
HS60-FLER4W	9IHS65060M20	FL-4L	2.36	1.75	1.740	3.480	TF-73	S-412

*Left hand quoted on request.

LAYDOWN

H-LNFR/L*

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS			Lock Pin
							Seat	Clamp	Clamp Screw	
H20-LNFR-43	9IH4206856	L43	1.250	1.625	0.765	1.450	-	TC-190	STC-9	NL-44
H24-LNFR-43	9IH4207256	L43	1.500	1.625	0.890	1.760	-	TC-190	STC-9	NL-44
H32-LNFR-43	9IH4208056	L43	2.000	1.625	1.281	2.400	LS43	TC-190	STC-5	NL-46
H24-LNFR-53API	9IH4407262	L53	1.500	1.625	0.890	1.760	-	TC-250	STC-11	NL-56
H32-LNFR-53API	9IH4408062	L53	2.000	1.625	1.281	2.400	-	TC-250	STC-11	NL-56
H24-LNFR-54API	9IH4407264	LDS 54	1.500	1.625	0.890	1.760	-	TC-250	STC-11	H410-1
H32-LNFR-54API	9IH4408064	LDS 54	2.000	1.625	1.281	2.400	-	TC-250	STC-11	NL-56


*Non API heads only for 8RD, 10RD, 5B75, 5B1 threads. API heads required for rotary shoulder connections threads.



INTERCHANGEABLE HEADS

HS-LNFR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

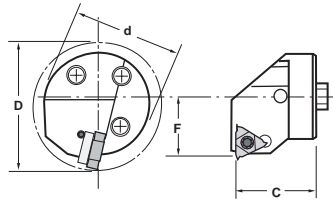

RH SHOWN

PARTS


Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS		
							Clamp	Clamp Screw	Lock Pin
HS32-LNFR-43	9IHS42032M56	L43	1.25	1.26	0.866	1.570	TC-190	STC-9	NL-44
HS40-LNFR-43	9IHS42040M56	L43	1.57	1.26	1.063	1.970	TC-190	STC-9	NL-44
HS50-LNFR-43	9IHS42050M56	L43	1.97	1.57	1.378	2.480	TC-190	STC-9	NL-44
HS40-LNFR-53API	9IHS4440M62	L53	1.57	1.26	1.063	1.970	TC-250	STC-11	NL-56
HS50-LNFR-53API	9IHS4450M62	L53	1.97	1.57	1.378	2.480	TC-250	STC-11	NL-56
HS40-LNFR-54API	9IHS4440M64	LDS 54	1.57	1.26	1.063	1.970	TC-250	STC-11	H410-1
HS50-LNFR-54API	9IHS4450M64	LDS 54	1.97	1.57	1.378	2.480	TC-250	STC-11	NL-56

*Non API heads only for 8RD, 10RD, 5B75, 5B1 threads. API heads required for rotary shoulder connections threads.

LAYDOWN

H-AVR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

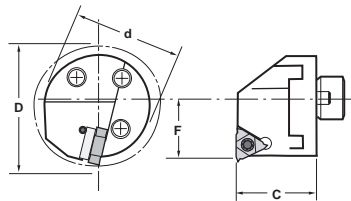

RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	PARTS		
							Insert Screw	Seat Screw	Seat
H16-AVR-3R	9IH18064361	16NR	1.000	1.625	0.650	1.200	SA-3	SY-3	Y13
H20-AVR-3R	9IH18068361	16NR	1.250	1.625	0.765	1.450	SA-3	SY-3	Y13
H24-AVR-3R	9IH18072361	16NR	1.500	1.625	0.890	1.760	SA-3	SY-3	Y13
H32-AVR-3R	9IH18080361	16NR	2.000	1.625	1.281	2.400	SA-3	SY-3	Y13
H24-AVR-4R	9IH18072401	22NR	1.500	1.625	0.978	1.760	SA-4	SY-4	Y14
H32-AVR-4R	9IH18080401	22NR	2.000	1.625	1.281	2.400	SA-4	SY-4	Y14

*Left hand quoted on request.

HS-AVR/L*

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	D	C	F	Min. Bore	PARTS		
							Insert Screw	Seat Screw	Seat
HS25-AVR-3R	9IHS18025M361	16NR	0.98	0.98	0.669	1.260	SA-3	SY-3	Y13
HS32-AVR-3R	9IHS18032M361	16NR	1.26	1.26	0.866	1.570	SA-3	SY-3	Y13
HS40-AVR-3R	9IHS18040M361	16NR	1.57	1.26	1.063	1.970	SA-3	SY-3	Y13
HS50-AVR-3R	9IHS18050M361	16NR	1.97	1.57	1.378	2.480	SA-3	SY-3	Y13
HS40-AVR-4R	9IHS18040M401	22NR	1.57	1.26	1.063	1.970	SA-4	SY-4	Y14
HS50-AVR-4R	9IHS18050M401	22NR	1.97	1.57	1.378	2.480	SA-4	SY-4	Y14

*Left hand quoted on request.

ON-EDGE

H-MTHOR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

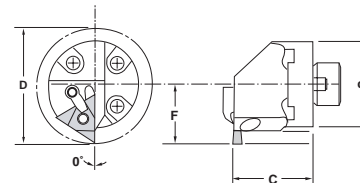

RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS		
							Clamp	Clamp Screw	Lock Pin
H16-MTHOR-3	9IH7301648	TNMA/C 32	1.000	1.625	0.688	1.690	TC-190	STC-5	NL-33
H20-MTHOR-3	9IH7302048	TNMA/C 32	1.250	1.625	0.798	1.788	TC-190	STC-5	NL-33
H24-MTHOR-3	9IH7302448	TNMA/C 32	1.500	1.625	0.923	1.875	TC-190	STC-5	NL-33
H20-MTHOR-4	9IH7302056	TNMA/C 43	1.250	1.625	1.048	2.420	TC-190	STC-5	NL-44
H24-MTHOR-4	9IH7302456	TNMA/C 43	1.500	1.625	1.173	2.625	TC-190	STC-5	NL-44
H28-MTHOR-4	9IH7302856	TNMA/C 43	1.750	1.625	1.298	2.875	TC-190	STC-5	NL-44
H32-MTHOR-4	9IH7303256	TNMA/C 43	2.000	1.625	1.423	2.875	TC-190	STC-5	NL-44
H40-MTHOR-4	9IH7304056	TNMA/C 43	2.500	1.625	1.673	3.375	TC-190	STC-5	NL-44
H24-MTHOR-5	9IH7302464	TNMA/C 54	1.500	1.625	1.173	3.200	TC-250	STC-11	NL-56
H28-MTHOR-5	9IH7302864	TNMA/C 54	1.750	1.625	1.298	3.250	TC-250	STC-11	NL-56
H32-MTHOR-5	9IH7303264	TNMA/C 54	2.000	1.625	1.423	3.250	TC-250	STC-11	NL-56
H40-MTHOR-5	9IH7304064	TNMA/C 54	2.500	1.625	1.673	3.375	TC-250	STC-11	NL-56


*Left hand quoted on request.



INTERCHANGEABLE HEADS

ON-EDGE HS-MTHOR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

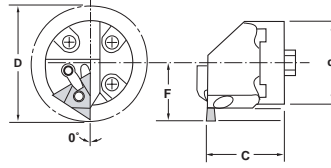

RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	PARTS		
							Clamp	Clamp Screw	Lock Pin
HS25-MTHOR-3	9IHS73025M48	TNMA/C 32	0.98	0.98	0.678	1.690	TC-190	STC-5	NL-33
HS32-MTHOR-3	9IHS73032M48	TNMA/C 32	1.26	1.26	0.800	1.788	TC-190	STC-5	NL-33
HS40-MTHOR-3	9IHS73040M48	TNMA/C 32	1.57	1.26	0.933	1.875	TC-190	STC-5	NL-33
HS32-MTHOR-4	9IHS73032M56	TNMA/C 43	1.26	1.26	1.050	2.420	TC-190	STC-5	NL-44
HS40-MTHOR-4	9IHS73040M56	TNMA/C 43	1.57	1.26	1.203	2.625	TC-190	STC-5	NL-44
HS50-MTHOR-4	9IHS73050M56	TNMA/C 43	1.97	1.57	1.413	2.875	TC-190	STC-5	NL-44
HS60-MTHOR-4	9IHS73060M56	TNMA/C 43	2.36	1.57	1.603	3.375	TC-190	STC-5	NL-44
HS40-MTHOR-5	9IHS73040M64	TNMA/C 54	1.57	1.26	1.203	3.200	TC-190	STC-11	NL-56
HS50-MTHOR-5	9IHS73050M64	TNMA/C 54	1.97	1.57	1.413	3.250	TC-250	STC-11	NL-56
HS60-MTHOR-5	9IHS73060M64	TNMA/C 54	2.36	1.57	1.603	3.375	TC-250	STC-11	NL-56

*Left hand quoted on request.

VEE BOTTOM H-CDHOR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

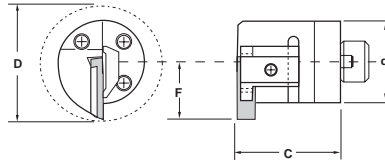

RH SHOWN


PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS	
							Clamp	Clamp Screw
H16-CDHOR-8	9IH6801682	V84/V85	1.000	1.625	0.925	1.525	CBL-84	S-526
H20-CDHOR-8	9IH6802082	V84/V85	1.250	1.625	0.875	1.600	CBL-84	S-526
H24-CDHOR-8	9IH6802482	V84/V85	1.500	1.625	1.000	1.850	CBL-84	S-526
H32-CDHOR-8	9IH6803282	V84/V85	2.000	1.625	1.285	2.385	CBL-84	S-526
H40-CDHOR-8	9IH6804082	V84/V85	2.500	1.625	1.500	2.850	CBL-84	S-526
H32-CDHOR-9	9IH6803286	V96/V98	2.000	1.625	1.410	2.510	CBL-98	SS110
H40-CDHOR-9	9IH6804086	V96/V98	2.500	1.625	1.584	2.935	CBL-98	SS110
H40-CDHOR-12	9IH6804092	V120	2.500	1.625	1.820	3.170	CBL-120	SB100

*Left hand quoted on request.

HS-CDHOR/L*

Most heads available with coolant port
(ie: Add CP to end of description)

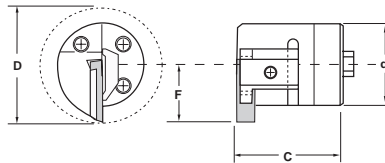

RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	PARTS	
							Clamp	Clamp Screw
HS25-CDHOR-8	9IHS68025M82	V84/V85	0.984	1.355	0.925	1.517	CBL-84	S-526
HS32-CDHOR-8	9IHS68032M82	V84/V85	1.260	1.625	0.875	1.600	CBL-84	S-526
HS40-CDHOR-8	9IHS68040M82	V84/V85	1.575	1.625	1.084	1.971	CBL-84	S-526
HS50-CDHOR-8	9IHS68050M82	V84/V85	1.970	1.625	1.281	2.366	CBL-84	S-526
HS60-CDHOR-8	9IHS68060M82	V84/V85	2.360	1.625	1.476	2.756	CBL-84	S-526
HS50-CDHOR-9	9IHS68050M86	V96/V98	1.970	1.625	1.362	2.447	CBL-98	SS110
HS60-CDHOR-9	9IHS68060M86	V96/V98	2.360	1.625	1.558	2.838	CBL-98	SS110
HS60-CDHOR-12	9IHS68060M92	V120	2.360	1.625	1.750	3.030	CBL-120	SB100

*Left hand quoted on request.




API

API

S-4400W


Steel Shank with Through Coolant

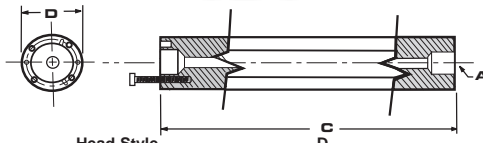

Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-4416W	9IBS4416W	H16-	1.000	9.000	1/4 - 18NPT	SS61
S-4420W	9IBS4420W	H20-	1.250	9.000	3/8 - 18NPT	SS81
S-4424W	9IBS4424W	H24-	1.500	10.000	3/8 - 18NPT	SS85
S-4428W	9IBS4428W	H28-	1.750	12.000	3/8 - 18NPT	SS100
S-4432W	9IBS4432W	H32-	2.000	13.000	3/8 - 18NPT	SS100
S-4436W	9IBS4436W	H36-	2.250	15.000	3/8 - 18NPT	SS100
S-4440W	9IBS4440W	H40-	2.500	17.000	3/8 - 18NPT	SS83

S-4400W48


Steel Shank with Through Coolant

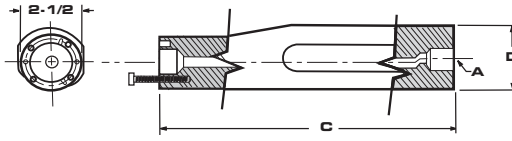

Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-4440W48	9IBS4440W48	H40-	3.000	18.000	3/8 - 18NPT	SS89


S-570

Steel Shank with Through Coolant

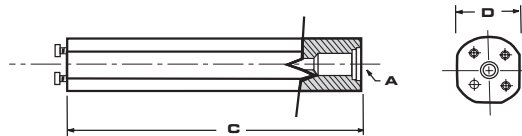

Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-570-10-16	9IBS5701016	HS16-	0.625	4.210	1/8 - 27NPT	SS62
S-570-12-20	9IBS5701220	HS20-	0.750	5.200	1/4 - 18NPT	SS63
S-570-16-25	9IBS5701625	HS25-	1.000	7.200	1/4 - 18NPT	SS64
S-570-20-32	9IBS5702032	HS32-	1.250	8.740	3/8 - 18NPT	SS81
S-570-24-40	9IBS5702440	HS40-	1.500	10.750	1/2 - 14NPT	SS100
S-570-32-50	9IBS5703250	HS50-	2.000	14.410	1/2 - 14NPT	SS94
S-570-40-60	9IBS5704060	HS60-	2.500	18.430	1/2 - 14NPT	SS95

H/HS-BLANKS

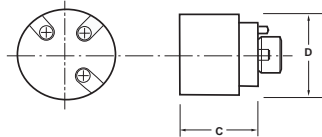

Description	EDP Code	D	C
H16-BLANK RH/LH*	9IH16BLKRH/LH	1.500	1.630
H20-BLANK RH/LH*	9IH20BLKRH/LH	1.625	1.630
H24-BLANK RH/LH*	9IH24BLKRH/LH	2.000	1.630
H28-BLANK RH/LH*	9IH28BLKRH/LH	2.000	1.630
H32-BLANK RH/LH*	9IH32BLKRH/LH	2.750	1.630
H40-BLANK RH/LH*	9IH40BLKRH/LH	2.750	1.900
HS25-BLANK RH/LH*	9IHS25BLKRH/LH	1.340	1.500
HS32-BLANK RH/LH*	9IHS32BLKRH/LH	1.740	1.665
HS40-BLANK RH/LH*	9IHS40BLKRH/LH	2.100	1.675
HS50-BLANK RH/LH*	9IHS50BLKRH/LH	2.708	1.650
HS60-BLANK RH/LH*	9IHS60BLKRH/LH	3.480	1.800

*Specify right or left hand when ordering.

CROSSOVER CHART

INTERCHANGEABLE HEAD

TOOL-FLO DESCRIPTION

KENAMETAL®

SANDVIK®

Head Style	TOOL-FLO DESCRIPTION	KENAMETAL®	SANDVIK®
<p>H Style</p>	H_-FLER_W	H_-FLER_W	
	H_-AVR_	H_-LSER-	
	H_-MTHOR_	H_-MTHOR_	
	H_-MCLNR_	H_-MCLNR_	
	H_-MDUNR_	H_-MDUNR_	
	H_-MSKNR_	H_-MSKNR_	
	H_-MTFNR_	H_-MTFNR_	
	H_-MVUNR_	H_-MVUNR_	
	H_-MWLNR_	H_-MWLNR_	
	<p>HS Style</p>	HS_-FLER_W	
HS_-AVR_			R566-4KFC-_-_-
HS_-MTHOR_			
HS_-MCLNR_			R571.31C-_-_-
HS_-MDUNR_			R571.35C-_-_-
HS_-MSKNR_			
HS_-MTFNR_			
HS_-MVUNR_			
HS_-MWLNR_			





EXTERNAL SCARFING INSERTS

SPUB-63 - EXTERNAL

3/4" Square 4-sided - OD

■ Holders may be quoted upon request.

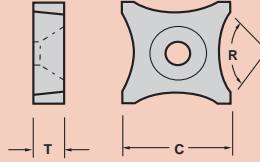


Description	EDP Code	Tube Diameter	T	C	R - Radius	TIN Coated		A11TiN Coated		
						GP50	GP54	AC22	AC50	ZA50
SPUB-63B-E	SI63EB	up to 7/8"	3/16"	3/4"	.475	●			●	●
SPUB-63C-E	SI63EC	7/8" - 1-1/8"	3/16"	3/4"	.590	●			●	●
SPUB-63D-E	SI63ED	1-1/8" - 1-1/2"	3/16"	3/4"	.785	●			●	●
SPUB-63E-E	SI63EE	1-1/2" - 1-7/8"	3/16"	3/4"	.985	●			●	●
SPUB-63F-E	SI63EF	1-7/8" - 2-1/4"	3/16"	3/4"	1.180	●			●	●
SPUB-63G-E	SI63EG	2-1/4" - 3-1/8"	3/16"	3/4"	1.575	●			●	●
SPUB-63H-E	SI63EH	3-1/8" - 3-7/8"	3/16"	3/4"	1.970	●			●	●
SPUB-63I-E	SI63EI	3-7/8" - 4-7/8"	3/16"	3/4"	2.470	●			●	●
SPUB-63J-E	SI63EJ	4-7/8" - 5-7/8"	3/16"	3/4"	2.970	●			●	●
SPUB-63K-E	SI63EK	5-7/8" - 6-7/8"	3/16"	3/4"	3.470	●			●	●
SPUB-63L-E	SI63EL	6-7/8" - 7-7/8"	3/16"	3/4"	3.970	●			●	●
SPUB-63M-E	SI63EM	7-7/8" and up	3/16"	3/4"	None	●			●	●
SPUB-63M-30-E	SI63EM30	30° Relief	3/16"	3/4"	None	●			●	●

SQ86 - EXTERNAL

1" Square 4-sided - OD

■ Holders may be quoted upon request.


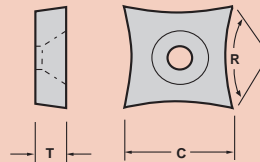


Description	EDP Code	Tube Diameter	T	C	R - Radius	TIN Coated		A11TiN Coated		
						GP50	GP54	AC22	AC50	ZA50
SQ86-14-0-E	SI86E0	ANY	3/8"	1.000	0.000	●			●	●
SQ86-14-2.5-E	SI86E25	3" - 4-3/4"	3/8"	1.000	2.500	●			●	●
SQ86-10-3.4-E	SI86E34	4-3/4" - 6-3/4"	3/8"	1.000	3.400	●			●	●
SQ86-14-4.5-E	SI86E45	6-3/4" - 8-3/4"	3/8"	1.000	4.500	●			●	●
SQ86-10-9.5-E	SI86E95	8-3/4" - 18"	3/8"	1.000	9.500	●			●	●

SQ86 - INTERNAL

1" Square 4-sided - ID

■ Holders may be quoted upon request.

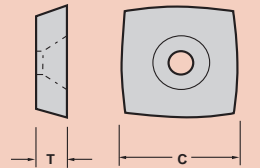


Description	EDP Code	Tube Diameter	T	C	R - Radius	TIN Coated		A11TiN Coated		
						GP50	GP54	AC22	AC50	ZA50
SQ86-14-0-I	SI86I0	ANY	3/8"	1.000	0.750	●			●	●
SQ86-14-2.5-I	SI86I25	3" - 4-3/4"	3/8"	1.000	1.000	●			●	●
SQ86-10-3.4-I	SI86I34	4-3/4" - 6-3/4"	3/8"	1.000	1.250	●			●	●

INTERNAL SCARFING INSERTS

IDR

■ Holders may be quoted upon request.

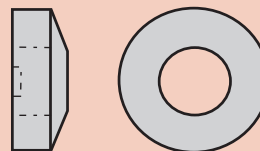

Description	EDP Code	Int'l Tube Diameter	Description	TIN Coated		A11TiN Coated		
				GP50	GP54	AC22	AC50	ZA50
IDR-2010	IDSR2010	9/16" - 11/16"	#1					
IDR-2020	IDSR2020	11/16" - 13/16"	#2			●	●	●
IDR-2030	IDSR2030	13/16" - 1-1/32"	#3			●	●	●
IDR-2040	IDSR2040	1-1/32" - 1-3/8"	#4			●	●	●
IDR-2050	IDSR2050	5/16" - 1-7/16"	#5			●	●	●
IDR-2060	IDSR2060	1-1/32" - 1-1/8"	#6			●	●	●
IDR-2070	IDSR2070	1-1/8" - 1-3/16"	#7			●	●	●
IDR-2080	IDSR2080	1-3/16" - 1-3/8"	#8			●	●	●
IDR-2090	IDSR2090	1-1/4" - 1-5/8"	#9			●	●	●
IDR-2100	IDSR2100	1-5/8" - 2"	#10			●	●	●
IDR-2110	IDSR2110	1-7/8" - 2-7/8"	#11			●	●	●
IDR-2120	IDSR2120	2-3/4" - 3-3/8"	#12			●	●	●
IDR-2130	IDSR2130	3-3/8" - 4"	#13			●	●	●
IDR-2140	IDSR2140	4" - 5"	#14			●	●	●
IDR-2150	IDSR2150	5" - 6-1/4"	#15			●	●	●
IDR-2160	IDSR2160	6" - 10-1/4"	#16			●	●	●





API



BRAZED TOOLS

API THREADING

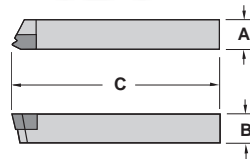

Description	EDP Code	TPI	TPF	A	B	C	Conn No orSize	C5H
B8 8RD EXT	77332E	8	3/4	1/2	1/2	4"	-	●
B8 8RD INT	77332I	8	3/4	1/2	1/2	4"	-	●
B8 10RD EXT	77334E	10	3/4	1/2	1/2	4"	-	●
B8 10RD INT	77334I	10	3/4	1/2	1/2	4"	-	●
B8 425 EXT	77309E	4	2	1/2	1/2	3-1/2	5-1/2 - 6-5/8 FH, 6-5/8 REG	
B8 425 INT	77309I	4	2	1/2	1/2	3-1/2	5-1/2 - 6-5/8 FH, 6-5/8 REG	
B8 428 EXT	77310E	4	2	1/2	1/2	3-1/2	NC23 - 50, 2-3/8 - 5-1/2 IF	
B8 428 INT	77310I	4	2	1/2	1/2	3-1/2	NC23 - 50, 2-3/8 - 5-1/2 IF	
B8 435 EXT	77311E	4	3	1/2	1/2	3-1/2	5-1/2 REG, 7-5/8 REG, 8-5/8 REG	
B8 435 INT	77311I	4	3	1/2	1/2	3-1/2	5-1/2 REG, 7-5/8 REG, 8-5/8 REG	
B8 438 EXT	77312E	4	3	1/2	1/2	3-1/2	NC56 - NC71	
B8 438 INT	77312I	4	3	1/2	1/2	3-1/2	NC56 - NC71	
B8 42F EXT*	77314E	4	2	1/2	1/2	3-1/2	VO.065*	
B8 42F INT*	77314I	4	2	1/2	1/2	3-1/2	VO.065*	
B8 530 EXT	77313E	5	3	1/2	1/2	3-1/2	3-1/2FH, 2-3/8 - 4-1/2 REG	
B8 530 INT	77313I	5	3	1/2	1/2	3-1/2	3-1/2FH, 2-3/8 - 4-1/2 REG	
B8 5B75 EXT	77316E	5	3/4	1/2	1/2	3-1/2	4-1/2 - 13-3/8	
B8 5B75 INT	77316I	5	3/4	1/2	1/2	3-1/2	4-1/2 - 13-3/8	
B8 5B1 EXT	77317E	5	1	1/2	1/2	3-1/2	16 AND LARGER	
B8 5B1 INT	77317I	5	1	1/2	1/2	3-1/2	16 AND LARGER	
B8 8B75 EXT	77321E	8	3/4	1/2	1/2	3-1/2	U.S. IMPROVED BUTTRESS	
B8 8B75 INT	77321I	8	3/4	1/2	1/2	3-1/2	U.S. IMPROVED BUTTRESS	
B10 8RD EXT	77532E	8	3/4	5/8	5/8	4"	-	●
B10 8RD INT	77532I	8	3/4	5/8	5/8	4"	-	●
B10 10RD EXT	77534E	10	3/4	5/8	5/8	4"	-	●
B10 10RD INT	77534I	10	3/4	5/8	5/8	4"	-	●
B10 425 EXT	77509E	4	2	5/8	5/8	3-1/2	5-1/2 - 6-5/8 FH, 6-5/8 REG	
B10 425 INT	77509I	4	2	5/8	5/8	3-1/2	5-1/2 - 6-5/8 FH, 6-5/8 REG	
B10 428 EXT	77510E	4	2	5/8	5/8	3-1/2	NC23 - 50, 2-3/8 - 5-1/2 IF	
B10 428 INT	77510I	4	2	5/8	5/8	3-1/2	NC23 - 50, 2-3/8 - 5-1/2 IF	
B10 435 EXT	77511E	4	3	5/8	5/8	3-1/2	5-1/2 REG, 7-5/8 REG, 8-5/8 REG	
B10 435 INT	77511I	4	3	5/8	5/8	3-1/2	5-1/2 REG, 7-5/8 REG, 8-5/8 REG	
B10 438 EXT	77512E	4	3	5/8	5/8	3-1/2	NC56 - NC71	
B10 438 INT	77512I	4	3	5/8	5/8	3-1/2	NC56 - NC71	
B10 42F EXT*	77514E	4	2	5/8	5/8	3-1/2	VO.065*	
B10 42F INT*	77514I	4	2	5/8	5/8	3-1/2	VO.065*	
B10 530 EXT	77513E	5	3	5/8	5/8	3-1/2	3-1/2FH, 2-3/8 - 4-1/2 REG	
B10 530 INT	77513I	5	3	5/8	5/8	3-1/2	3-1/2FH, 2-3/8 - 4-1/2 REG	
B10 5B75 EXT	77516E	5	3/4	5/8	5/8	3-1/2	4-1/2 - 13-3/8	
B10 5B75 INT	77516I	5	3/4	5/8	5/8	3-1/2	4-1/2 - 13-3/8	
B10 5B1 EXT	77517E	5	1	5/8	5/8	3-1/2	16 AND LARGER	
B10 5B1 INT	77517I	5	1	5/8	5/8	3-1/2	16 AND LARGER	
B10 8B75 EXT	77521E	8	3/4	5/8	5/8	3-1/2	U.S. IMPROVED BUTTRESS	
B10 8B75 INT	77521I	8	3/4	5/8	5/8	3-1/2	U.S. IMPROVED BUTTRESS	

* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel


Cross Reference Chart

TOOL-FLO	VALENITE®	CARBOLOY®	VARDEX®	ISCAR®	TGI®	KENAMETAL®
L43	TNEM 43					
LDS 43	TNEG 43					
L53						
LDS 54	TNEG 54					
LDS 54 - FT	TNEGX 54					
TNMC	TNEC/TNMC					
TNFA	TNFA					
16ER		16ER	3ER	16ER		
16NR		16NR	3IR	16IR		
22ER		22ER	4ER	22ER		
22NR		22NR	4IR	22IR		
27ER		27ER	5ER	27ER		
27NR		27NR	5NR	27IR		
V84					LCE/LPE 444	
V85					LCE/LPE 454	
FLD						ND
FLDC						NDC
FLTC						NTC




BRAZED TOOLS

ACME THREADING NO PITCH

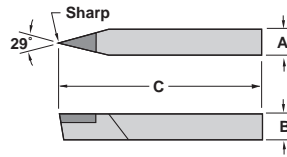

Description	EDP Code	TPI	A	B	C	C5H
B6 NT NO PITCH	77104A	6-16	3/8	3/8	2-1/2	●
B8 NT NO PITCH	77304A	4-16	1/2	1/2	3-1/2	●
B10 NT NO PITCH	77504A	2-16	5/8	5/8	4	●
B12 NT NO PITCH	77604A	2-16	3/4	3/4	4-1/2	●

RING GROOVING NO PITCH




Description	EDP Code	W	R	A	B	C	Conn No or Size	C5H
B10 RG125	77506V	.125	1/32	5/8	5/8	4	R19, 20, 22, 25, 29, 33, 36, 40, 43, 48, 52, 56, 59, 64, 68, 72 & 76	●
B12 RG156	77706W	.156	1/32	3/4	3/4	5	RX210	●
B64 RG197	77806X	.197	1/32	3/4	1	6	R21, 23, 24, 27, 30, 31, 34, 35, 37, 39, 41, 44, 45, 49, 53, 57, 61, 65, 69, 84, 92, 99 & RX-215	●
B85 RG197	77906X	.197	1/32	1	1-1/4	7	R21, 23, 24, 27, 30, 31, 34, 35, 37, 39, 41, 44, 45, 49, 53, 57, 61, 65, 69, 84, 92, 99 & RX-215	●
B64 RG206	77806Y	.206	1/16	3/4	1	6	R26, 32, 46, 73 & 85	●
B85 RG206	77906Y	.206	1/16	1	1-1/4	7	R26, 32, 46, 73 & 85	●
B86 RG278	77907C	.278	1/16	1	1-1/2	8	BX-151	●
B86 RG350	77907Z	.350	1/16	1	1-1/2	8	BX-154	●

* See page 21 for ring groove specs.


In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

Cast Iron	
Non-Ferrous	
Stainless/High Temp	
Steel	


FLO-LOCK LEFT HAND

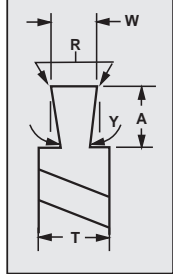

FLO-LOCK RIGHT HAND

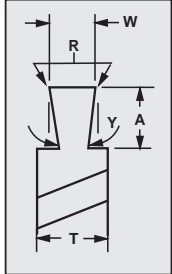

*We welcome specials!
Please call us with your specs.*

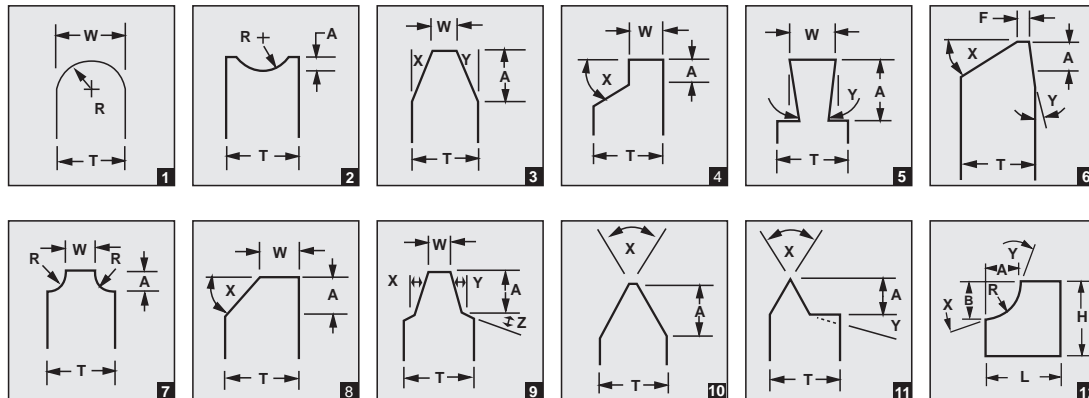



TECHNICAL INFORMATION

thread form	Tool-Flo insert		tool joint application	minimum box size
	cresting	non-cresting		
V-.038R 2" tpf 4 tpi	TNMA 55 428 FLDC-4-428 E/I 22E/NR 428 27E/NR 428 L53 428 L43 428 V85 428	FLD-3038R/L	2-3/8 API Internal Flush 2-7/8 API Internal Flush 3-1/2 API Internal Flush 4 API Internal Flush 4-1/2 API Internal Flush 5-1/2 API Internal Flush 4 API Full Hole NC23 NC26 NC31 NC35 NC38 NC40 NC44 NC46 NC50	NC31 2-7/8 IF
V-.038R 3" tpf 4 tpi	FLDC-4-438 E/I 22E/N 438	FLD-3038R/L	NC56 NC61 NC70 NC77	NC56
V-.050 2" tpf 4 tpi	FLDC-4-425 E/I 27E/N 425	FLD-4050R/L	5-1/2 API Full Hole 6-5/8 API Regular 6-5/8 API Full Hole	5-1/2 API Full Hole
V-.050 3" tpf 4 tpi	FLDC-4-435 E/I 22E/NR 435	FLD-4050R/L	5-1/2 API Regular 7-5/8 API Regular 8-5/8 API Regular	5-1/2 API Regular
V-.040 3" tpf 5 tpi	FLDC-3-530 E/I FLDC-4-530 E/I 22E/NR 530	FLD-3040R/L FLD-4040R/L	2-3/8 API Regular 2-7/8 API Regular 3-1/2 API Regular 4-1/2 API Regular 3-1/2 API Full Hole 4-1/2 API Full Hole	3-1/2 API Regular

API NC SPECIFICATIONS				
Conn. No. of Size	Thread Form	TPI	TPF	Cat. No.
NC10	V-0.055	6	1-1/2	VO.055
NC12	V-0.055	6	1-1/2	VO.055
NC13	V-0.055	6	1-1/2	VO.055
NC16	V-0.055	6	1-1/2	VO.055
NC23	V-0.038	4	2	428
NC26	V-0.038	4	2	428
NC31	V-0.038	4	2	428
NC35	V-0.038	4	2	428
NC38	V-0.038	4	2	428
NC40	V-0.038	4	2	428
NC44	V-0.038	4	2	428
NC46	V-0.038	4	2	428
NC50	V-0.038	4	2	428
NC56	V-0.038	4	3	438
NC61	V-0.038	4	3	438
NC70	V-0.038	4	3	438
NC71	V-0.038	4	3	438

API REGULAR SPECIFICATIONS				
Conn. No. of Size	Thread Form	TPI	TPF	Cat. No.
1, 1-1/2 REG	V0.055	6	1-1/2	MT
2-3/8 REG.	V-0.040	5	3	530
2-7/8 REG.	V-0.040	5	3	530
3-1/2 REG.	V-0.040	5	3	530
4-1/2 REG.	V-0.040	5	3	530
5-1/2 REG.	V-0.050	4	3	435
6-5/8 REG.	V-0.050	4	2	425
7-5/8 REG.	V-0.050	4	3	435
8-5/8 REG.	V-0.050	4	3	435

API FULL HOLE SPECIFICATIONS				
Conn. No. of Size	Thread Form	TPI	TPF	Cat. No.
3-1/2 FH	V-0.040	5	3	530
4 FH	V-0.038	4	2	428
4-1/2 FH	V-0.040	5	3	530
5-1/2 FH	V-0.050	4	2	425
6-5/8 FH	V-0.050	4	2	425

API INTERNAL FLUSH SPECIFICATIONS				
Conn. No. of Size	Thread Form	TPI	TPF	Cat. No.
2-3/8 IF	V-0.038	4	2	428
2-7/8 IF	V-0.038	4	2	428
3-1/2 IF	V-0.038	4	2	428
4 IF	V-0.038	4	2	428
5-1/2 IF	V-0.038	4	2	428

API THREAD FORM SPECIFICATIONS					
Thread Form	TPI	TPF	Width or Flat Crest	Root Radius	Cat. No.
V-0.038	4	2	.065	-.038	428
V-0.038	4	3	.065	-.038	438
V-0.040	5	3	.040	-.020	530
V-0.050	4	3	.050	-.025	435
V-0.050	4	2	.050	-.025	425
V-0.065*	4	2	.065	.056	42F*
V-0.076	4	1-1/2	.076	.067	4PAC
V-0.055	6	1-1/2	.055	.047	VO.055


*Obsolescent thread form - See API Spec 7, 35th Edition, May 1, 1985, Section 9.4




PRODUCT THREAD DIMENSIONS - ROTARY SHOULDER CONNECTIONS

thread form	taper in. per ft.	thread height not truncated H	thread height truncated $h_n = h_s$	root truncation $S_m = S_{rs}$ $f_m = f_{rs}$	crest truncation $f_{cn} = f_{cs}$	width of flat		root radius $r_m = r_{rs}$	radius at thread corners r	pitch p
						crest $f_{cn} = f_{cs}$	crest $f_m = f_{rs}$			
V-038R	2	.216005	.121844	.038000	.056161	.065	-	.038	.015	.250
V-038R	3	.215379	.121381	.038000	.055998	.065	-	.038	.015	.250
V-040	3	.172303	.117842	.020000	.034461	.040	-	.020	.015	.200
V-050	3	.215379	.147303	.025000	.043076	.050	-	.025	.015	.250
V-050	2	.216005	.147804	.025000	.043201	.050	-	.025	.015	.250


V-040 AND V-050 PRODUCT THREAD FORM

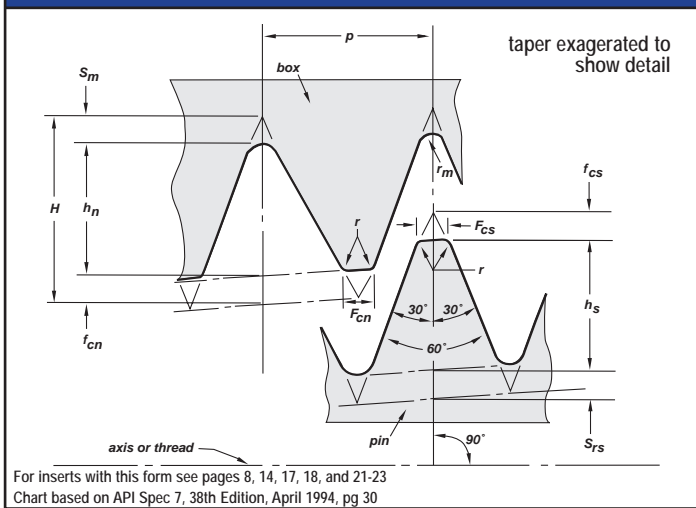


API BUTTRESS

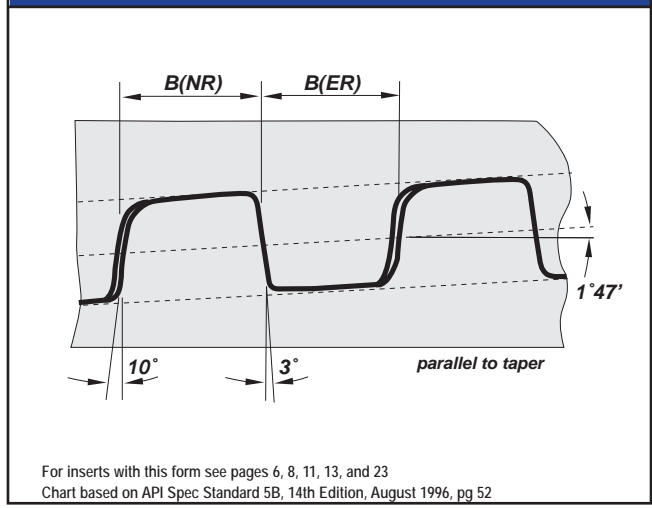

API CASING AND TUBING ROUND THREAD FORM

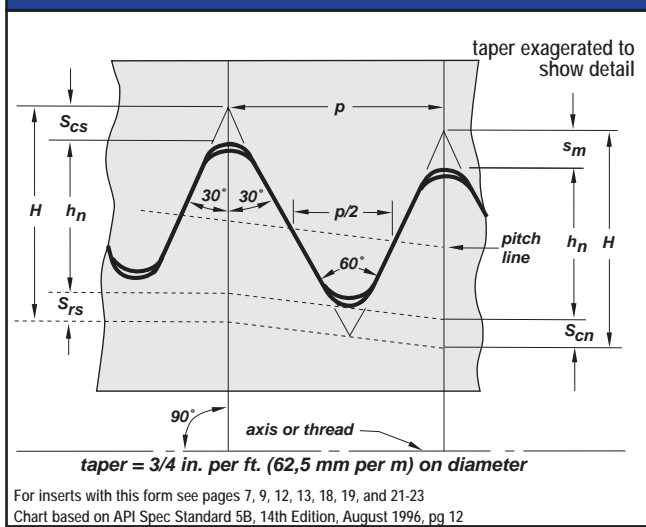

AMERICAN NATIONAL PIPE THREAD (NPT)

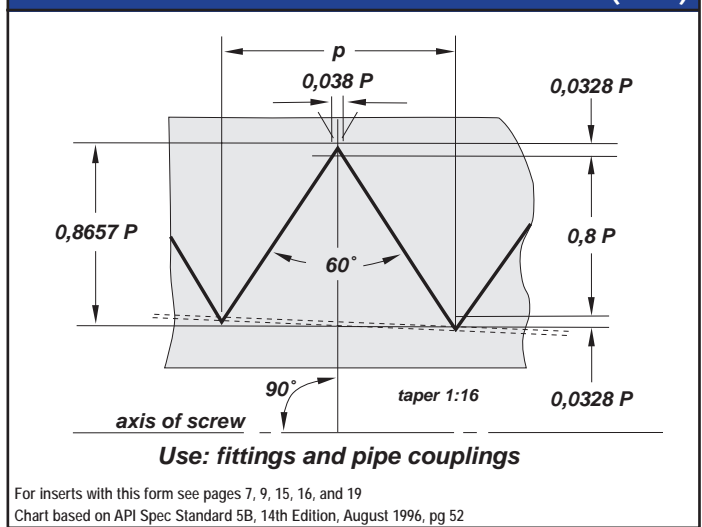

CASING AND TUBING ROUND THREAD (Height Dimensions)

thread element		10 threads per inch p=.1000	8 threads per inch p=.1250
H	=	.866p	.10825
$H_s = h_n$	=	.626p - .007	.07125
$S_{rs} = S_m$	=	.120p + .002	.01700
$S_{cs} = S_{cn}$	=	.120p + .005	.02000

NPT PIPE SIZE CROSSOVER

pipe size	NPT thread per inch
1/16", 1/8"	27 NPT
1/4", 3/8"	18NPT
1/2", 3/4"	14 NPT
1" - 2"	11.5 NPT
2-1/2" and up	8 NPT




TOOL-FLO



AUTOMOTIVE



Poly-Vee Insert Identification Chart

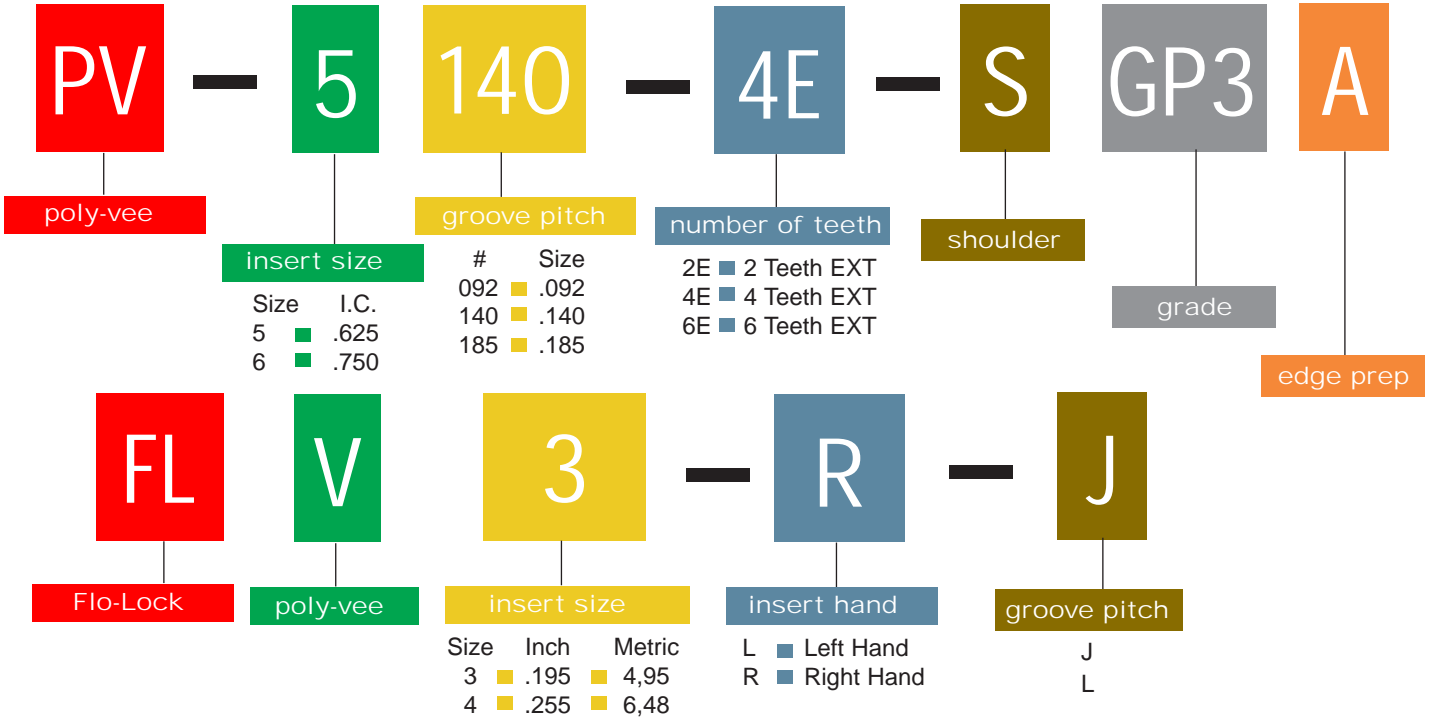

- PV**
- Multi-tooth inserts for faster cycle times
 - Inserts are precision ground for premium tolerance
 - Strong cutting edge able to withstand moderate interruption
- PV-S**
- Multi-tooth inserts for faster cycle times
 - Inserts are precision ground for premium tolerance
 - Strong cutting edge able to withstand moderate interruption
 - Shoulder configuration produces more finished grooves per plunge




- FLV**
- Single-point insert for flexible programming
 - Inserts are precision ground for premium tolerance
 - Strong cutting edge able to withstand moderate interruption
 - Fits into industry standard holders

POLY-VEE

PV-S

Multi-Tooth w/ Shoulder

■ For holder STCNR see next page






Insert Description	EDP Code	Cross Section*	IC	H	T	P	r	R	# of teeth	Coatings						
										C25	GP25	AC25	AC3	AC50	CB200	PC33
PV-5092-4E-S	PV50924ES	J	.625	.203	.252	.092	.008	.012	4	●	●	●	●	●	●	●
PV-5092-6E-S	PV50926ES	J	.625	.203	.252	.092	.008	.012	6	●	●	●	●	●	●	●
PV-5140-2E-S	PV51402ES	K	.625	.203	.252	.140	.013	.016	2	●	●	●	●	●	●	●
PV-5140-4E-S	PV51404ES	K	.625	.203	.252	.140	.013	.016	4	●	●	●	●	●	●	●
PV-6140-6E-S	PV61406ES	K	.750	.203	.250	.140	.013	.016	6	●	●	●	●	●	●	●
PV-6185-4E-S	PV61854ES	L	.750	.203	.250	.185	.021	.013	4	●	●	●	●	●	●	●

PV

Multi-Tooth w/o Shoulder

■ For holder STCNR see next page



Insert Description	EDP Code	Cross Section*	IC	H	T	P	r	R	# of teeth	Coatings						
										C25	GP25	AC25	AC3	AC50	CB200	PC33
PV-5092-4E	PV50924E	J	.625	.203	.252	.092	.008	.012	4	●	●	●	●	●	●	●
PV-5092-6E	PV50926E	J	.625	.203	.252	.092	.008	.012	6	●	●	●	●	●	●	●
PV-5140-2E	PV51402E	K	.625	.203	.252	.140	.013	.016	2	●	●	●	●	●	●	●
PV-5140-4E	PV51404E	K	.625	.203	.252	.140	.013	.016	4	●	●	●	●	●	●	●
PV-6140-6E	PV61406E	K	.750	.203	.250	.140	.013	.016	6	●	●	●	●	●	●	●
PV-6185-4E	PV61854E	L	.750	.203	.250	.185	.021	.013	4	●	●	●	●	●	●	●

*See table on page.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Material	Coatings
Cast Iron	●
Non-Ferrous	●
Stainless/High Temp	●
Steel	●



AUTOMOTIVE


POLY-VEE STCNR

Most holders available with coolant port
(ie: Add CP to end of description)

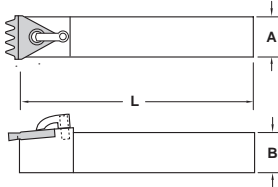


Description	EDP Code	A	B	L	Insert	Insert Screw	Clamp	Clamp Screw
STCNR-165	977064641	1.000	1.000	6.000	PV-5	SD-2	TC-250	STC-11
STCNR-205	9770206641	1.250	1.250	6.000	PV-5	SD-2	TC-250	STC-11
STCNR-206	9770206761	1.250	1.250	6.000	PV-6	SD-2	TC-251	STC-11

POLY-VEE FLO-LOCK FLV



RH Shown




Insert Description	EDP Code	R	R1	T	E	H	A	B	Coatings				
									C25	GP3	GP50	AC3	AC50
FLV-3RJ	623800R	.012	.008	.195	.125	.087	.344	.4013	●	●	●	●	●
FLV-3RK	623900R	.016	.013	.195	.100	.136	.344	.4000	●	●	●	●	●
FLV-4RL	624800R	.012	.015	.255	.118	.201	.453	.6288	●	●	●	●	●
FLV-3LJ	623800L	.012	.008	.195	.125	.087	.344	.4013	●	●	●	●	●
FLV-3LK	623900L	.016	.013	.195	.100	.136	.344	.4000	●	●	●	●	●
FLV-4LL	624800L	.012	.015	.255	.118	.201	.453	.6288	●	●	●	●	●

PISTON GROOVING KEYSTONE FLG

Chipbreaker

Exclusive patented design!



RH Shown



Insert Description	EDP Code	W	R	H	T	A	B	Coatings				
								C25	GP3	GP50	AC3	AC50
FLG-4R W.059 TF19908	TF19908	.059	.012	.275	.255	.453	.6288	●	●	●	●	●

Available in PCD!
Any width or configuration!
Call us with your piston grooving needs!


TNMA
TNMC
FLG

GROOVING CHIP-FLO FLG-CB


Chipbreaker

Exclusive patented design!
See page 92 for a complete listing!

- Features:
- Patented chipbreaker - Patent No. 6,146,064
 - Maximum chip control
 - Industry standard widths



RH Shown



Insert Description	EDP Code	W		R	E		T	A	B	Gage Dia.	Coatings					
		Metric	Inch		Metric	Inch					C3	GP3	GP50	AC3	AC50	AC22
FLG-2M100R-CB	562M100PR	1,00	.039	.005/.010	1,90	.075	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M100L-CB	562M100PL	1,00	.039	.005/.010	1,90	.075	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M150R-CB	562M150PR	1,50	.059	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M150L-CB	562M150PL	1,50	.059	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M170R-CB	562M170PR	1,70	.067	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M170L-CB	562M170PL	1,70	.067	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M195R-CB	562M195PR	1,95	.077	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M195L-CB	562M195PL	1,95	.077	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M200R-CB	562M200PR	2,00	.079	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M200L-CB	562M200PL	2,00	.079	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M220R-CB	562M220PR	2,20	.087	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M220L-CB	562M220PL	2,20	.087	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M225R-CB	562M225PR	2,25	.089	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M225L-CB	562M225PL	2,25	.089	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M250R-CB	562M250PR	2,50	.098	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2M250L-CB	562M250PL	2,50	.098	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron	▲	●	▲	▲
Non-Ferrous	●	●	●	●
Stainless/High Temp	▲	●	▲	▲
Steel	●	▲	●	▲

AUTOMOTIVE



WHEEL TURNING

DBV
High Polish

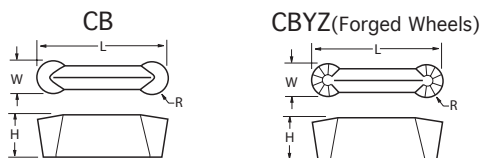


Insert Description	EDP Code	W	R	L	H	C2P	ALS2	AC3	AC50
DBV-315 FNR-CB	TF17420	.315	.157	1.180	.320	●	●		
DBV-315 FNR-CBYZ	TF22487	.315	.157	1.180	.320	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.	<ul style="list-style-type: none"> ● High performance choice in optimal conditions. ▲ Recommended grade under general conditions. 	Aluminum	▲	●		
		Steel				●


WHEEL TURNING

TFHDR/L

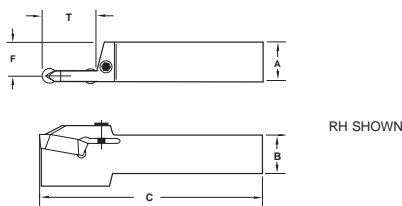

Description	EDP Code	Insert	T	A	B	C	F	Screw
TFHDR-25.4-8	9828168	DBV	1.000	1.000	1.000	6.000	.884	S-412
TFHDL-25.4-8	9827168	DBV	1.000	1.000	1.000	6.000	.884	S-412
TFHDR-31.7-8	9828208	DBV	1.000	1.250	1.250	6.700	1.133	S-412
TFHDL-31.7-8	9827208	DBV	1.000	1.250	1.250	6.700	1.133	S-412

POLY-VEE TECHNICAL INFORMATION

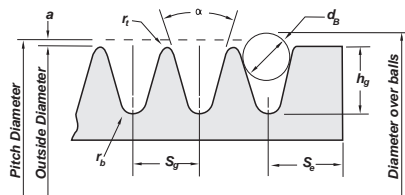

Face width = $S_e(N_g - 1) + 2S_e$, where N_g is number of grooves

Cross Section	Minimum Recommended Outside Diameter	Groove Angle ± 0.25 (deg)	S_g^a	r_g + 0.005 - 0.000	2_s	r_b	h_g (min)	d_b ± 0.0005	S_e
H	0.50	40	0.063 ± 0.001	0.005	0.020	0.013 + 0.000 - 0.005	0.041	0.0469	0.080 + 0.020 - 0.010
J	0.80	40	0.092 ± 0.001	0.008	0.030	0.015 + 0.000 - 0.005	0.071	0.0625	0.125 + 0.030 - 0.015
K	1.50	40	0.140 ± 0.002	0.010	0.038	0.020 + 0.000 - 0.005	0.122	0.1093	0.125 + 0.050 - 0.000
L	3.00	40	0.185 ± 0.002	0.015	0.058	0.015 + 0.000 - 0.005	0.183	0.1406	0.375 + 0.075 - 0.030
M	7.00	40	0.370 ± 0.003	0.030	0.116	0.030 + 0.000 - 0.010	0.377	0.2812	0.500 + 0.100 - 0.040

Other Sheave Tolerances

Outside Diameter	Radial Runout	Axial Runout
Up through 2.9 in. outside diameter ± 0.010 in.	Up through 2.9 in. outside diameter ± 0.005 in.	0.001 in. per inch of outside diameter
Over 2.9 in. to and including 8.0 in. outside diameter ± 0.020 in. For each additional inch of outside diameter over 8.0 in., add ± 0.025 in. add 0.0005 in.	Over 2.9 in. to and including 10.0 in. outside diameter ± 0.010 in. For each additional inch of outside diameter over 10.0 in.,	

All dimensions in inches.

^aSummation of the deviations from S for all groovers in any one sheave shall not exceed ± 0.010 in.

^bVariations in pitch diameter between groovers in any one sheave must be within the following limits: Up through 2.9 in. outside diameter and up through 6 grooves, 0.002 in. (add 0.001 in. for each additional groove); over 2.9 in. to and including 19.9 in. and up through 10 grooves, 0.010 in. (add 0.0005 in. for each additional groove). This variation can be obtained by measuring the distance across two measuring balls or rods placed in the grooves diametrically opposite each other. Comparing this "diameter-over-balls or -rods" measurement between grooves will give the variation in pitch diameter.

^cTotal indicator reading.



TOOL FLO



BALL NOSE

End Mills

BALLNOSE




Ball Nose End Mills



BALLNOSE

Rigid-Lock Ball Nose Cutter Nomenclature Chart

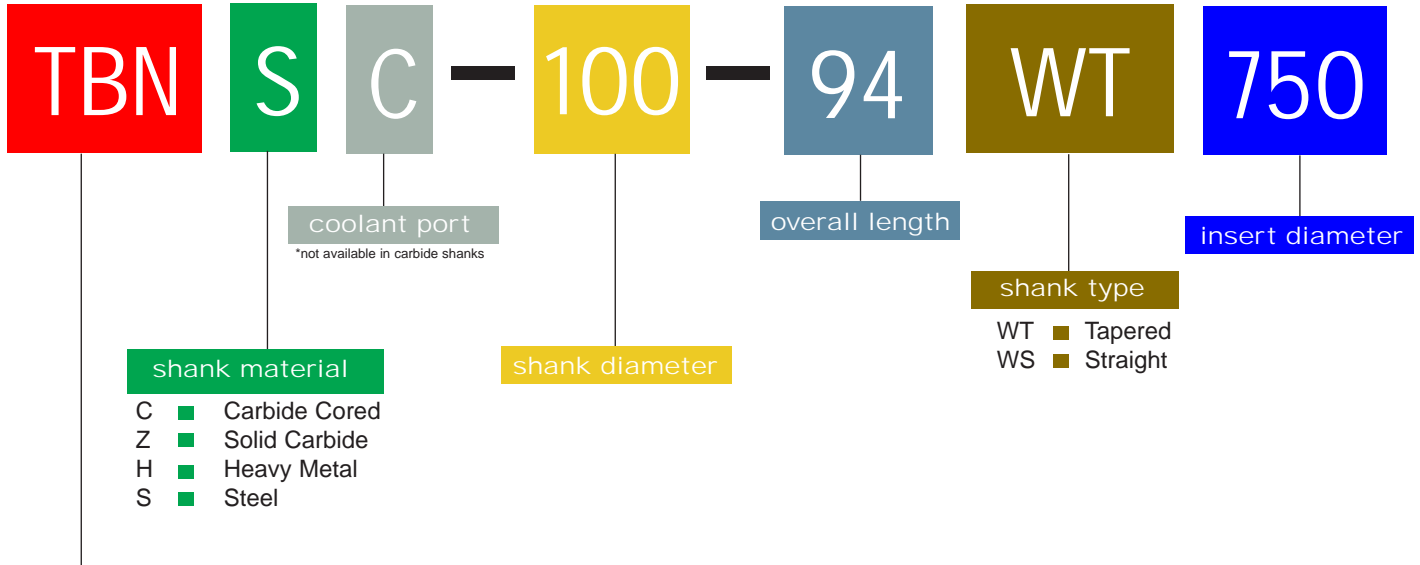

end mill style

TBNS

- Finishing style ballnose end mill for precision milling applications
- Inserts are CNC ground to tolerance of +/- .0005 effective in the cutter
- Run at high speeds to reduce machining time by as much as 50%

TBDS

- Flat bottom/Back draft style for parts where square shoulders are required
- Inserts are CNC ground to tolerance of +/- .0005 effective in the cutter
- Run at high speeds to reduce machining time by as much as 50%

TOOL-FLO GUARANTEE

All above endmills feature our patented **RIGID-LOCK** serrated locking system. Precision ground serrations provide increased stability in the pocket and allow for increased speeds/feeds while preventing insert movement in the pocket. No insert movement means longer insert life as well as longer cutter body life. **Tool-Flo Mfg will replace any cutter body that experiences pocket wear***

*excludes insert screw wear, or tools that have been crashed.




BALLNOSE

BALLNOSE

TBNR-N

Neutral-Rake Finishing Inserts

■ For cutter bodies see pg. 38, 39




Insert Description	EDP Code	Dia	R	Coating						
				C26S	GP26	ZS26S	ZS26	AC3	DX200	CBN Tipped*
TBNR-250-N	TBNR250N	.250	.125	●	●	●	●	●	●	●
TBNR-312-N	TBNR312N	.312	.156	●	●	●	●	●	●	●
TBNR-375-N	TBNR375N	.375	.187	●	●	●	●	●	●	●
TBNR-500-N	TBNR500N	.500	.250	●	●	●	●	●	●	●
TBNR-625-N	TBNR625N	.625	.312	●	●	●	●	●	●	●
TBNR-750-N	TBNR750N	.750	.375	●	●	●	●	●	●	●
TBNR-1000-N	TBNR1000N	1.000	.500	●	●	●	●	●	●	●
TBNR-1250-N	TBNR1250N	1.250	.625	●	●	●	●	●	●	●

*CBN tipped inserts must run in machine with head tilted at 5° minimum

TBNR-P

Positive-Rake Finishing Inserts

■ For cutter bodies see pg. 38, 39



Insert Description	EDP Code	Dia	R	Coating						
				C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBNR-250-P	TBNR250P	.250	.125	●	●	●	●	●	●	●
TBNR-312-P	TBNR312P	.312	.156	●	●	●	●	●	●	●
TBNR-375-P	TBNR375P	.375	.187	●	●	●	●	●	●	●
TBNR-500-P	TBNR500P	.500	.250	●	●	●	●	●	●	●
TBNR-625-P	TBNR625P	.625	.312	●	●	●	●	●	●	●
TBNR-750-P	TBNR750P	.750	.375	●	●	●	●	●	●	●
TBNR-875-P	TBNR875P	.875	.437	●	●	●	●	●	●	●
TBNR-1000-P	TBNR1000P	1.000	.500	●	●	●	●	●	●	●
TBNR-1125-P*	TBNR1125P	1.125	.562	●	●	●	●	●	●	●
TBNR-1250-P	TBNR1250P	1.250	.625	●	●	●	●	●	●	●
TBNR-1500-P	TBNR1500P	1.500	.750	●	●	●	●	●	●	●
TBNR-1625-P	TBNR1625P	1.625	.812	●	●	●	●	●	●	●
TBNR-1750-P	TBNR1750P	1.750	.875	●	●	●	●	●	●	●
TBNR-2000-P	TBNR2000P	2.000	1.000	●	●	●	●	●	●	●
TBNR-2500-P	TBNR2500P	2.500	1.250	●	●	●	●	●	●	●


*Use in cutter for TBNR-1000P

TBXR-N

Neutral-Rake Roughing Inserts

■ For cutter bodies see pg. 38, 39

Special Design for Roughing!




Insert Description	EDP Code	Dia	R	Coating						
				C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBXR-500-N	TBXR500N	.500	.250	●	●	●	●	●	●	●
TBXR-625-N	TBXR625N	.625	.312	●	●	●	●	●	●	●
TBXR-750-N	TBXR750N	.750	.375	●	●	●	●	●	●	●
TBXR-875-N	TBXR875N	.875	.437	●	●	●	●	●	●	●
TBXR-1000-N	TBXR1000N	1.000	.500	●	●	●	●	●	●	●
TBXR-1250-N	TBXR1250N	1.250	.625	●	●	●	●	●	●	●
TBXR-1500-N	TBXR1500N	1.500	.750	●	●	●	●	●	●	●

SPHEROID STYLE

TBRR-P

Positive-Rake Finishing Inserts

■ For cutter bodies see pg. 38, 39



Insert Description	EDP Code	Dia	R	Coating						
				C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBRR-250-P	TBRR250P	.250	.125	●	●	●	●	●	●	●
TBRR-312-P	TBRR312P	.312	.156	●	●	●	●	●	●	●
TBRR-375-P	TBRR375P	.375	.187	●	●	●	●	●	●	●
TBRR-500-P	TBRR500P	.500	.250	●	●	●	●	●	●	●
TBRR-625-P	TBRR625P	.625	.312	●	●	●	●	●	●	●
TBRR-750-P	TBRR750P	.750	.375	●	●	●	●	●	●	●
TBRR-875-P	TBRR875P	.875	.437	●	●	●	●	●	●	●
TBRR-1000-P	TBRR1000P	1.000	.500	●	●	●	●	●	●	●
TBRR-1125-P*	TBRR1125P	1.125	.562	●	●	●	●	●	●	●
TBRR-1250-P	TBRR1250P	1.250	.625	●	●	●	●	●	●	●
TBRR-1500-P	TBRR1500P	1.500	.750	●	●	●	●	●	●	●

*Use in cutter for TBRR-1000P

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●	●	●	●	●	●	●
Non-Ferrous	▲	●	●	●	●	●	●
Stainless/High Temp	●	●	●	●	●	●	●
Steel	●	●	●	●	●	●	●
Hardened Material	●	●	●	●	▲	●	●
Composite	●	●	●	●	▲	●	●


BALLNOSE



BALL NOSE TBNS-WT

Tapered neck holders (Inch) w/coolant port

Available in Steel, Carbide Cored & Heavy Metal.



Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
3/4"	TBNSC-100-75WT750	TBNSC10075WT750	.750	3.000	7.500	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
3/4"	TBNSC-100-94WT750	TBNSC10094WT750	.750	3.000	9.437	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
1"	TBNSC-125-82WT1000	TBNSC12582WT1000	1.000	3.875	8.250	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1"	TBNSC-125-94WT1000	TBNSC12594WT1000	1.000	3.875	9.437	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNSC-150-94WT1250	TBNSC15094WT1250	1.250	4.750	9.437	1.500	3° Taper	TBNR/RR-1250	STBN-8	K6


Tapered neck holders (Inch) without coolant port

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
1/4"	TBNS-375-40WT250	TBNS37540WT250	.250	1.375	4.000	.375	3° Taper	TBNR/RR-250	STBN-1A	K2
5/16"	TBNS-500-50WT312	TBNS50050WT312	.312	1.906	5.000	.500	3° Taper	TBNR/RR-312	STBN-2	K3
3/8"	TBNS-500-50WT375	TBNS50050WT375	.375	1.375	5.000	.500	3° Taper	TBNR/RR-375	STBN-3	K3
1/2"	TBNS-625-60WT500	TBNS62560WT500	.500	2.312	6.000	.625	3° Taper	TBNR/RR-500	STBN-4	K3
5/8"	TBNS-750-68WT625	TBNS75068WT625	.625	2.562	6.875	.750	3° Taper	TBNR/RR-625	STBN-5	K3
3/4"	TBNS-100-75WT750	TBNS10075WT750	.750	3.000	7.500	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
3/4"	TBNS-100-94WT750	TBNS10094WT750	.750	3.000	9.437	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
1"	TBNS-125-82WT1000	TBNS12582WT1000	1.000	3.875	8.250	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1"	TBNS-125-94WT1000	TBNS12594WT1000	1.000	3.875	9.437	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNS-150-94WT1250	TBNS15094WT1250	1.250	4.750	9.437	1.500	3° Taper	TBNR/RR-1250	STBN-8	K6

TBNC-WT

Carbide Cored Shank

Tapered neck holders (Inch) without coolant port





Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
5/8"	TBNC-750-68WT625	TBNC75068WT625	.625	2.562	6.875	.750	3° Taper	TBNR/RR-625	STBN-5	K3
3/4"	TBNC-100-75WT750	TBNC10075WT750	.750	3.000	7.500	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
3/4"	TBNC-100-94WT750	TBNC10094WT750	.750	3.000	9.437	1.000	3° Taper	TBNR/RR-750	STBN-6	K4
1"	TBNC-125-82WT1000	TBNC12582WT1000	1.000	3.875	8.250	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1"	TBNC-125-94WT1000	TBNC12594WT1000	1.000	3.875	9.437	1.250	3° Taper	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNC-150-94WT1250	TBNC15094WT1250	1.250	4.750	9.437	1.500	3° Taper	TBNR/RR-1250	STBN-8	K6

TBNS-WS

Available in Steel, Carbide Cored & Heavy Metal.

Straight neck holders (Inch) w/coolant port

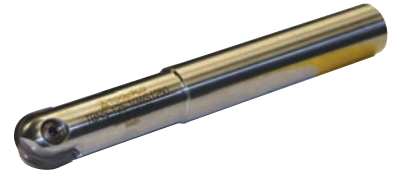

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
3/4"	TBNSC-750-45WS750	TBNSC75045WS750	.750	1.750	6.750	.750	.690	TBNR/RR-750	STBN-6	K4
3/4"	TBNSC-750-67WS750	TBNSC75067WS750	.750	2.375	6.750	.750	.690	TBNR/RR-750	STBN-6	K4
1"	TBNSC-100-62WS1000	TBNSC10062WS1000	1.000	1.750	6.281	1.000	.906	TBNR/RR-1000	STBN-7	K5
1"	TBNSC-100-75WS1000	TBNSC10075WS1000	1.000	2.750	7.500	1.000	.906	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNSC-125-10WS1250	TBNSC12510WS1250	1.250	3.850	10.000	1.250	1.142	TBNR/RR-1250	STBN-8	K6


Straight neck holders (Inch) without coolant port

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
1/4"	TBNS-375-40WS250	TBNS37540WS250	.250	.750	4.000	.375	.225	TBNR/RR-250	STBN-1A	K2
5/16"	TBNS-375-40WS312	TBNS37540WS312	.312	.750	4.000	.375	.281	TBNR/RR-312	STBN-2	K3
3/8"	TBNS-500-35WS375	TBNS50035WS375	.375	1.344	3.562	.500	.355	TBNR/RR-375	STBN-3	K3
1/2"	TBNS-500-35WS500	TBNS50035WS500	.500	1.250	3.562	.500	.470	TBNR/RR-500	STBN-4	K3
1/2"	TBNS-500-50WS500	TBNS50050WS500	.500	1.250	5.000	.500	.470	TBNR/RR-500	STBN-4	K3
5/8"	TBNS-625-55WS625	TBNS62555WS625	.625	1.375	5.500	.625	.551	TBNR/RR-625	STBN-5	K3
5/8"	TBNS-625-62WS625	TBNS62562WS625	.625	2.000	6.281	.625	.551	TBNR/RR-625	STBN-5	K3
3/4"	TBNS-750-45WS750	TBNS75045WS750	.750	1.750	4.500	.750	.690	TBNR/RR-750	STBN-6	K4
3/4"	TBNS-750-62WS750	TBNS75062WS750	.750	1.750	6.281	.750	.690	TBNR/RR-750	STBN-6	K4
3/4"	TBNS-750-67WS750	TBNS75067WS750	.750	2.375	6.750	.750	.690	TBNR/RR-750	STBN-6	K4
3/4"	TBNS-750-82WS750	TBNS75082WS750	.750	2.375	8.250	.750	.690	TBNR/RR-750	STBN-6	K4
7/8"	TBNS-100-62WS875	TBNS10062WS875	.875	1.750	6.281	1.000	.794	TBNR/RR-875	STBN-7	K5
1"	TBNS-100-62WS1000	TBNS10062WS1000	1.000	1.750	6.281	1.000	.906	TBNR/RR-1000	STBN-7	K5
1"	TBNS-100-75WS1000	TBNS10075WS1000	1.000	2.750	7.500	1.000	.906	TBNR/RR-1000	STBN-7	K5
1"	TBNS-100-90WS1000	TBNS10090WS1000	1.000	3.125	9.062	1.000	.906	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNS-125-10WS1250	TBNS12510WS1250	1.250	3.875	10.000	1.250	1.125	TBNR/RR-1250	STBN-8	K6
1-1/2"	TBNS-150-12WS1500	TBNS15012WS1500	1.500	4.000	12.000	1.500	1.375	TBNR/RR-1500	STBN-8	K6
1-5/8"	TBNS-162-12WS1625	TBNS16212WS1625	1.625	4.000	12.000	1.625	1.375	TBNR/RR-1625	STBN-9	K7
1-3/4"	TBNS-175-14WS1750	TBNS17514WS1750	1.750	5.000	14.000	1.750	1.500	TBNR/RR-1750	STBN-9	K7
2"	TBNS-200-16WS2000	TBNS20016WS2000	2.000	6.000	16.000	2.000	1.625	TBNR/RR-2000	STBN-10	K8
2-1/2"	TBNS-250-16WS2500	TBNS25016WS2500	2.500	6.000	16.000	2.500	2.125	TBNR/RR-2500	STBN-10	K8



Carbide Cored Shank

BALLNOSE

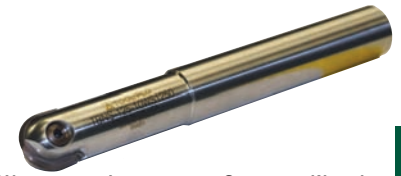

TBNC-WS

Straight neck holders (Inch) without coolant port


Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
1/2"	TBNC-500-35WS500	TBNC50035WS500	.500	1.250	3.562	.500	.470	TBNR/RR-500	STBN-4	K3
1/2"	TBNC-500-50WS500	TBNC50050WS500	.500	1.250	5.000	.500	.470	TBNR/RR-500	STBN-4	K3
5/8"	TBNC-625-55WS625	TBNC62555WS625	.625	1.375	5.500	.625	.551	TBNR/RR-625	STBN-5	K3
5/8"	TBNC-625-62WS625	TBNC62562WS625	.625	2.000	6.281	.625	.551	TBNR/RR-625	STBN-5	K3
3/4"	TBNC-750-45WS750	TBNC75045WS750	.750	1.750	4.500	.750	.709	TBNR/RR-750	STBN-6	K4
3/4"	TBNC-750-62WS750	TBNC75062WS750	.750	1.750	6.281	.750	.709	TBNR/RR-750	STBN-6	K4
3/4"	TBNC-750-67WS750	TBNC75067WS750	.750	2.375	6.750	.750	.709	TBNR/RR-750	STBN-6	K4
3/4"	TBNC-750-82WS750	TBNC75082WS750	.750	2.375	8.250	.750	.709	TBNR/RR-750	STBN-6	K4
7/8"	TBNC-100-62WS875	TBNC10062WS875	.875	2.375	6.281	1.000	.810	TBNR/RR-875	STBN-7	K5
1"	TBNC-100-62WS1000	TBNC10062WS1000	1.000	1.750	6.281	1.000	.906	TBNR/RR-1000	STBN-7	K5
1"	TBNC-100-75WS1000	TBNC10075WS1000	1.000	2.750	7.500	1.000	.906	TBNR/RR-1000	STBN-7	K5
1"	TBNC-100-90WS1000	TBNC10090WS1000	1.000	3.125	9.062	1.000	.906	TBNR/RR-1000	STBN-7	K5
1-1/4"	TBNC-125-10WS1250	TBNC12510WS1250	1.250	3.875	10.000	1.250	1.125	TBNR/RR-1250	STBN-8	K6
1-1/2"	TBNC-150-12WS1500	TBNC15012WS1500	1.500	4.000	12.000	1.500	1.375	TBNR/RR-1500	STBN-8	K6
1-5/8"	TBNC-162-12WS1625	TBNC16212WS1625	1.625	4.000	12.000	1.625	1.375	TBNR/RR-1625	STBN-9	K7
1-3/4"	TBNC-175-14WS1750	TBNC17514WS1750	1.750	5.000	14.000	1.750	1.500	TBNR/RR-1750	STBN-9	K7
2"	TBNC-200-16WS2000	TBNC20016WS2000	2.000	6.000	16.000	2.000	1.625	TBNR/RR-2000	STBN-10	K8
2-1/2"	TBNC-250-16WS2500	TBNC25016WS2500	2.500	6.000	16.000	2.500	2.125	TBNR/RR-2500	STBN-10	K8

BALLNOSE

TBNR-M-N

Neutral Rake - Finishing Insert (METRIC)

Cutter: TBNSC/TBNS/TBNC




Insert Description	EDP Code	Dia	R	C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBNR-10M-N	TBNR10MN	10,0	5,0	●	●	●	●	●		
TBNR-12M-N	TBNR12MN	12,0	6,0	●	●	●	●	●		
TBNR-16M-N	TBNR16MN	16,0	8,0	●	●	●	●	●		
TBNR-20M-N	TBNR20MN	20,0	10,0	●	●	●	●	●		
TBNR-25M-N	TBNR25MN	25,0	12,5	●	●	●	●	●		
TBNR-30M-N	TBNR30MN	30,0	15,0	●	●	●	●	●		
TBNR-32M-N	TBNR32MN	32,0	16,0	●	●	●	●	●		

*CBN tipped inserts must run in machine with head tilted at 5° minimum

TBNR-M-P

Positive Rake - Finishing Insert (METRIC)

Cutter: TBNSC/TBNS/TBNC




Insert Description	EDP Code	Dia	R	C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBNR-8M-P	TBNR8MP	8,0	4,0	●	●	●	●	●		
TBNR-10M-P	TBNR10MP	10,0	5,0	●	●	●	●	●		
TBNR-12M-P	TBNR12MP	12,0	6,0	●	●	●	●	●		
TBNR-16M-P	TBNR16MP	16,0	8,0	●	●	●	●	●		
TBNR-20M-P	TBNR20MP	20,0	10,0	●	●	●	●	●		
TBNR-25M-P	TBNR25MP	25,0	12,5	●	●	●	●	●		
TBNR-30M-P	TBNR30MP	30,0	15,0	●	●	●	●	●		
TBNR-32M-P	TBNR32MP	32,0	16,0	●	●	●	●	●		
TBNR-40M-P	TBNR40MP	40,0	20,0	●	●	●	●	●		
TBNR-50M-P	TBNR50MP	50,0	25,0	●	●	●	●	●		
TBNR-65M-P	TBNR65MP	65,0	32,5	●	●	●	●	●		

TBXR-M-N

Special Design for Roughing!

Neutral Rake - Roughing Insert (METRIC)

Cutter: TBNSC/TBNS/TBNC



Insert Description	EDP Code	Dia	R	C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
TBXR-16M-P	TBNR16MP	16,0	8,0	●	●	●	●	●		
TBXR-20M-P	TBNR20MP	20,0	10,0	●	●	●	●	●		
TBXR-25M-P	TBNR25MP	25,0	12,5	●	●	●	●	●		
TBXR-30M-P	TBNR30MP	30,0	15,0	●	●	●	●	●		
TBXR-32M-P	TBNR32MP	32,0	16,0	●	●	●	●	●		
TBXR-40M-P	TBNR40MP	40,0	20,0	●	●	●	●	●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron				●						
Non-Ferrous			▲							
Stainless/High Temp								●		
Steel								●		
Hardened Material								▲		
Composite										



SPHEROID STYLE TBRR-M-P

Positive-Rake Finishing Insert - **METRIC**

Cutter: TBNSC/TBNS/TBNC



Insert Description	EDP Code	Dia	R	C26S	Uncoated	TIN Coated	ZS26S	AlTiN Coated	PCD Coated	CBN Tipper*
TBRR-8M-P	TBRR8MP	8,0	4,0							
TBRR-10M-P	TBRR10MP	10,0	5,0		●					
TBRR-12M-P	TBRR12MP	12,0	6,0		●					
TBRR-16M-P	TBRR16MP	16,0	8,0		●					
TBRR-20M-P	TBRR20MP	20,0	10,0		●					
TBRR-25M-P	TBRR25MP	25,0	12,5		●					
TBRR-30M-P	TBRR30MP	30,0	15,0		●					
TBRR-32M-P	TBRR32MP	32,0	16,0		●					

Cast Iron				●						
Non-Ferrous				▲						
Stainless/High Temp								●		
Steel								●		
Hardened Material								▲		●
Composite								▲	●	


In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

TBNS-WT

Tapered Neck Holder (**METRIC**) w/coolant port

Available in Steel, Carbide Cored & Heavy Metal.

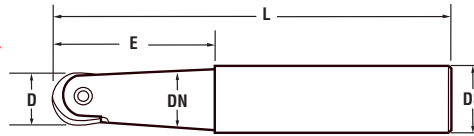

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
16mm	TBNSC-20M-175WT16	TBNSC20M175WT16	16,0	60,0	175,0	20,0	3° Taper	TBNR/RR-16M	STBN-5	K3
20mm	TBNSC-25M-200WT20	TBNSC25M200WT20	20,0	80,0	200,0	25,0	3° Taper	TBNR/RR-20M	STBN-6	K4
25mm	TBNSC-32M-225WT25	TBNSC32M225WT25	25,0	100,0	225,0	32,0	3° Taper	TBNR/RR-25M	STBN-7	K5
30mm	TBNSC-40M-225WT30	TBNSC40M225WT30	30,0	120,0	225,0	40,0	3° Taper	TBNR/RR-30M	STBN-8	K6
32mm	TBNSC-40M-225WT32	TBNSC40M225WT32	32,0	120,0	225,0	40,0	3° Taper	TBNR/RR-32M	STBN-8	K6


Tapered Neck Holder (**METRIC**) without coolant port

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
8mm	TBNS-10M-125WT8	TBNS10M125WT8	8,0	35,0	125,0	10,0	3° Taper	TBNR/RR-8M	STBN-2	K3
10mm	TBNS-12M-125WT10	TBNS12M125WT10	10,0	35,0	125,0	12,0	3° Taper	TBNR/RR-10M	STBN-3	K3
12mm	TBNS-16M-160WT12	TBNS16M160WT12	12,0	60,0	160,0	16,0	3° Taper	TBNR/RR-12M	STBN-4	K3
16mm	TBNS-20M-180WT16	TBNS20M180WT16	16,0	60,0	180,0	20,0	3° Taper	TBNR/RR-16M	STBN-5	K3
20mm	TBNS-25M-190WT20	TBNS25M190WT20	20,0	80,0	190,0	25,0	3° Taper	TBNR/RR-20M	STBN-6	K4
20mm	TBNS-25M-230WT20	TBNS25M230WT20	20,0	80,0	230,0	25,0	3° Taper	TBNR/RR-20M	STBN-6	K4
25mm	TBNS-32M-210WT25	TBNS32M210WT25	25,0	100,0	210,0	32,0	3° Taper	TBNR/RR-25M	STBN-7	K5
25mm	TBNS-32M-240WT25	TBNS32M240WT25	25,0	100,0	240,0	32,0	3° Taper	TBNR/RR-25M	STBN-7	K5
30mm	TBNS-40M-250WT30	TBNS40M250WT30	30,0	120,0	250,0	40,0	3° Taper	TBNR/RR-30M	STBN-8	K6
32mm	TBNS-40M-250WT32	TBNS40M250WT32	32,0	120,0	250,0	40,0	3° Taper	TBNR/RR-32M	STBN-8	K6

TBNC-WT

Tapered Neck Holder (**METRIC**) without coolant port

Carbide Cored Shank

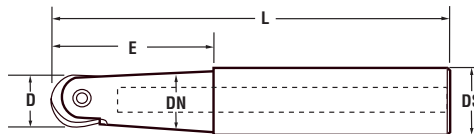

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
16mm	TBNC-20M-180WT16	TBNC20M180WT16	16,0	60,0	180,0	20,0	3° Taper	TBNR/RR-16M	STBN-5	K3
20mm	TBNC-25M-190WT20	TBNC25M190WT20	20,0	80,0	190,0	25,0	3° Taper	TBNR/RR-20M	STBN-6	K4
20mm	TBNC-25M-230WT20	TBNC25M230WT20	20,0	80,0	230,0	25,0	3° Taper	TBNR/RR-20M	STBN-6	K4
25mm	TBNC-32M-210WT25	TBNC32M210WT25	25,0	100,0	210,0	32,0	3° Taper	TBNR/RR-25M	STBN-7	K5
25mm	TBNC-32M-240WT25	TBNC32M240WT25	25,0	100,0	240,0	32,0	3° Taper	TBNR/RR-25M	STBN-7	K5
30mm	TBNC-40M-250WT30	TBNC40M250WT30	30,0	120,0	250,0	40,0	3° Taper	TBNR/RR-30M	STBN-8	K6
32mm	TBNC-40M-250WT32	TBNC40M250WT32	32,0	120,0	250,0	40,0	3° Taper	TBNR/RR-32M	STBN-8	K6





BALLNOSE

TBNS-WS

Straight Neck Holder (**METRIC**) w/coolant port (RH only)

Available in Steel, Carbide Cored & Heavy Metal.

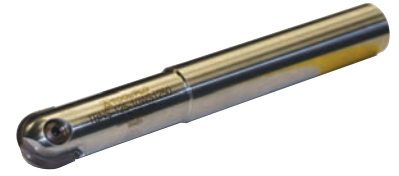

BALLNOSE

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
20mm	TBNSC-20M-175WS20	TBNSC20M175WS20	20,0	45,0	175,0	20,0	18,0	TBNR/RR-20M	STBN-6	K4
25mm	TBNSC-25M-190WS25	TBNSC25M190WS25	25,0	70,0	190,0	25,0	23,0	TBNR/RR-25M	STBN-7	K5
32mm	TBNSC-32M-210WS32	TBNSC32M210WS32	32,0	80,0	210,0	32,0	27,2	TBNR/RR-32M	STBN-8	K6



Straight Neck Holder (**METRIC**) without coolant port (RH only)

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
8mm	TBNS-8M-100WS8	TBNS8M100WS8	8,0	19,0	100,0	8,0	7,5	TBNR/RR-8M	STBN-2	K3
10mm	TBNS-10M-100WS10	TBNS10M100WS10	10,0	19,0	100,0	10,0	9,0	TBNR/RR-10M	STBN-3	K3
12mm	TBNS-12M-130WS12	TBNS12M130WS12	12,0	36,0	130,0	12,0	10,5	TBNR/RR-12M	STBN-4	K3
12mm	TBNS-12M-150WS12	TBNS12M150WS12	12,0	46,0	150,0	12,0	10,5	TBNR/RR-12M	STBN-4	K3
16mm	TBNS-16M-140WS16	TBNS16M140WS16	16,0	36,0	140,0	16,0	14,0	TBNR/RR-16M	STBN-5	K3
16mm	TBNS-16M-160WS16	TBNS16M160WS16	16,0	36,0	160,0	16,0	14,0	TBNR/RR-16M	STBN-5	K3
20mm	TBNS-20M-160WS20	TBNS20M160WS20	20,0	45,0	160,0	20,0	18,0	TBNR/RR-20M	STBN-6	K4
20mm	TBNS-20M-175WS20	TBNS20M175WS20	20,0	45,0	175,0	20,0	18,0	TBNR/RR-20M	STBN-6	K4
25mm	TBNS-25M-160WS25	TBNS25M160WS25	25,0	45,0	160,0	25,0	23,0	TBNR/RR-25M	STBN-7	K5
25mm	TBNS-25M-190WS25	TBNS25M190WS25	25,0	70,0	190,0	25,0	23,0	TBNR/RR-25M	STBN-7	K5
30mm	TBNS-30M-175WS30	TBNS30M175WS30	30,0	56,0	175,0	30,0	27,2	TBNR/RR-30M	STBN-8	K6
30mm	TBNS-30M-210WS30	TBNS30M210WS30	30,0	80,0	210,0	30,0	27,2	TBNR/RR-30M	STBN-8	K6
32mm	TBNS-32M-175WS32	TBNS32M175WS32	32,0	56,0	175,0	32,0	27,2	TBNR/RR-32M	STBN-8	K6
32mm	TBNS-32M-210WS32	TBNS32M210WS32	32,0	80,0	210,0	32,0	27,2	TBNR/RR-32M	STBN-8	K6
40mm	TBNS-40M-305WS40	TBNS40M305WS40	40,0	101,0	305,0	32,0	35,0	TBNR/RR-40M	STBN-8	K6
50mm	TBNS-50M-406WS50	TBNS50M406WS50	50,0	152,0	406,0	50,0	41,0	TBNR/RR-50M	STBN-10	K8
65mm	TBNS-65M-406WS65	TBNS65M406WS65	65,0	152,0	406,0	65,0	54,0	TBNR/RR-65M	STBN-10	K8

TBNC-WS

Straight Neck Holder (**METRIC**) without coolant port (RH only)

Carbide Cored Shank

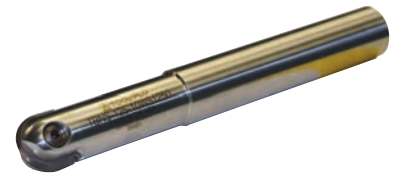

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
12mm	TBNC-12M-130WS12	TBNC12M130WS12	12,0	36,0	130,0	12,0	10,5	TBNR/RR-12M	STBN-4	K3
12mm	TBNC-12M-150WS12	TBNC12M150WS12	12,0	46,0	150,0	12,0	10,5	TBNR/RR-12M	STBN-4	K3
16mm	TBNC-16M-140WS16	TBNC16M140WS16	16,0	36,0	140,0	16,0	14,0	TBNR/RR-16M	STBN-5	K3
16mm	TBNC-16M-160WS16	TBNC16M160WS16	16,0	36,0	160,0	16,0	14,0	TBNR/RR-16M	STBN-5	K3
20mm	TBNC-20M-160WS20	TBNC20M160WS20	20,0	45,0	160,0	20,0	18,0	TBNR/RR-20M	STBN-6	K4
20mm	TBNC-20M-175WS20	TBNC20M175WS20	20,0	45,0	175,0	20,0	18,0	TBNR/RR-20M	STBN-6	K4
25mm	TBNC-25M-160WS25	TBNC25M160WS25	25,0	45,0	160,0	25,0	23,0	TBNR/RR-25M	STBN-7	K5
25mm	TBNC-25M-190WS25	TBNC25M190WS25	25,0	70,0	190,0	25,0	23,0	TBNR/RR-25M	STBN-7	K5
30mm	TBNC-30M-175WS30	TBNC30M175WS30	30,0	56,0	175,0	30,0	27,2	TBNR/RR-30M	STBN-8	K6
30mm	TBNC-30M-210WS30	TBNC30M210WS30	30,0	80,0	210,0	30,0	27,2	TBNR/RR-30M	STBN-8	K6
32mm	TBNC-32M-175WS32	TBNC32M175WS32	32,0	56,0	175,0	32,0	27,2	TBNR/RR-32M	STBN-8	K6
32mm	TBNC-32M-210WS32	TBNC32M210WS32	32,0	80,0	210,0	32,0	27,2	TBNR/RR-32M	STBN-8	K6


BALLNOSE



FLAT BOTTOM STYLE TBFI

Neutral Rake Finishing Insert - INCH

Cutter: TBDS & TBDC





Size	Insert Description	EDP Code	W	R	L	C26S	Uncoated	TIN Coated	AlTiN Coated	PCD Coated	CBN Tipped*
						GP26	ZS26S	ZS26	AC3	DX200	CB200
1/2"	TBFI-500-02	TBDI50002	.500	.032	.500	●	●	●	●	●	●
1/2"	TBFI-500-04	TBFI50004	.500	.063	.500	●	●	●	●	●	●
5/8"	TBFI-625-02	TBFI62502	.625	.032	.580	●	●	●	●	●	●
5/8"	TBFI-625-04	TBFI62504	.625	.063	.580	●	●	●	●	●	●
3/4"	TBFI-750-02	TBFI75002	.750	.032	.642	●	●	●	●	●	●
3/4"	TBFI-750-04	TBFI75004	.750	.063	.642	●	●	●	●	●	●
1"	TBFI-1000-02	TBFI100002	1.000	.032	.867	●	●	●	●	●	●
1"	TBFI-1000-04	TBFI100004	1.000	.063	.867	●	●	●	●	●	●
1"	TBFI-1000-08	TBFI100008	1.000	.125	.867	●	●	●	●	●	●

BACK DRAFT STYLE TBDI

Neutral Rake Finishing Insert - INCH

Cutter: TBDS & TBDC



Size	Insert Description	EDP Code	W	R	L	C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
1/2"	TBDI-500-02	TBDI50002	.500	.032	.500	●	●	●	●	●	●	●
1/2"	TBDI-500-04	TBDI50004	.500	.063	.500	●	●	●	●	●	●	●
5/8"	TBDI-625-02	TBDI62502	.625	.032	.580	●	●	●	●	●	●	●
5/8"	TBDI-625-04	TBDI62504	.625	.063	.580	●	●	●	●	●	●	●
3/4"	TBDI-750-02	TBDI75002	.750	.032	.642	●	●	●	●	●	●	●
3/4"	TBDI-750-04	TBDI75004	.750	.063	.642	●	●	●	●	●	●	●
1"	TBDI-1000-02	TBDI100002	1.000	.032	.867	●	●	●	●	●	●	●
1"	TBDI-1000-04	TBDI100004	1.000	.063	.867	●	●	●	●	●	●	●
1"	TBDI-1000-08	TBDI100008	1.000	.125	.867	●	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.



- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●						
Non-Ferrous	▲						
Stainless/High Temp							
Steel							
Hardened Material							
Composite							

FLAT BOTTOM/ BACK DRAFT STYLE TBDS-WS

Straight Neck Holder (INCH)

Use TBFI & TBFI Inserts Only

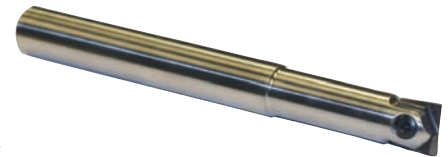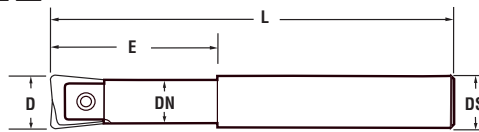



Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
1/2"	TBDS-500-59WS500	TBDS50059WS500	.500	1.890	5.980	.500	.413	TBFI / FI-500	STBN-4	K3 / T-10
5/8"	TBDS-625-63WS625	TBDS62563WS625	.625	2.160	6.380	.625	.551	TBFI / FI-625	STBN-5	K3 / T-10
3/4"	TBDS-750-68WS750	TBDS75068WS750	.750	2.480	6.890	.750	.709	TBFI / FI-750	STBN-6	K4 / T-20
1"	TBDS-100-74WS1000	TBDS10074WS1000	1.000	2.830	7.480	1.000	.882	TBFI / FI-1000	STBN-7	K5 / T-25

FLAT BOTTOM/ BACK DRAFT STYLE TBDC-WS

Straight Neck Holder (INCH)

Carbide Cored Shank

Use TBFI & TBFI Inserts Only

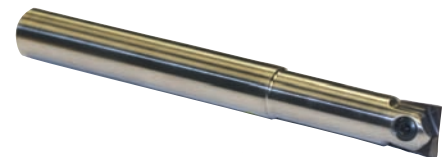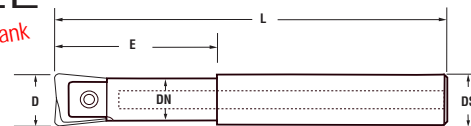

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
1/2"	TBDC-500-59WS500	TBDC50059WS500	.500	1.890	5.980	.500	.413	TBFI / FI-500	STBN-4	K3 / T-10
5/8"	TBDC-625-63WS625	TBDC62563WS625	.625	2.160	6.380	.625	.551	TBFI / FI-625	STBN-5	K3 / T-10
3/4"	TBDC-750-68WS750	TBDC75068WS750	.750	2.480	6.890	.750	.709	TBFI / FI-750	STBN-6	K4 / T-20
1"	TBDC-100-74WS1000	TBDC10074WS1000	1.000	2.830	7.480	1.000	.882	TBFI / FI-1000	STBN-7	K5 / T-25




BALLNOSE

FLAT BOTTOM STYLE TBF1

Neutral Rake Finishing Insert - **METRIC**

Cutter: TBDS & TBDC

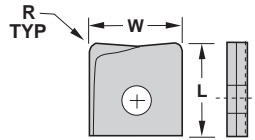



Size	Insert Description	EDP Code	W	R	L	C26S	Uncoated	TiN Coated	AlTiN Coated	PCD Coated	CBN Tipped*
8mm	TBF1-8M-02	TBDI8M02	8,0	(02) 0,81	12,7						
8mm	TBF1-8M-04	TBF18M04	8,0	(04) 1,60	12,7		●				●
16mm	TBF1-16M-02	TBF116M02	16,0	(02) 0,81	14,7		●				
16mm	TBF1-16M-04	TBF116M04	16,0	(04) 1,60	14,7		●				
20mm	TBF1-20M-02	TBF120M02	20,0	(02) 0,81	16,3		●				●
20mm	TBF1-20M-04	TBF120M04	20,0	(04) 1,60	16,3		●				●
25mm	TBF1-25M-02	TBF125M02	25,0	(02) 0,81	22,0		●				
25mm	TBF1-25M-04	TBF125M04	25,0	(04) 1,60	22,0		●				●
25mm	TBF1-25M-08	TBF125M08	25,0	(08) 3,18	22,0		●				●

BALLNOSE

BACK DRAFT STYLE TBD1

Neutral Rake Finishing Insert - **METRIC**

Cutter: TBDS & TBDC



Size	Insert Description	EDP Code	W	R	L	C26S	GP26	ZS26S	ZS26	AC3	DX200	CB200
8mm	TBD1-8M-02	TBDI8M02	8,0	(02) 0,81	12,7		●			●		●
8mm	TBD1-8M-04	TBF18M04	8,0	(04) 1,60	12,7		●			●		●
16mm	TBD1-16M-02	TBF116M02	16,0	(02) 0,81	14,7		●			●		
16mm	TBD1-16M-04	TBF116M04	16,0	(04) 1,60	14,7		●			●		
20mm	TBD1-20M-02	TBF120M02	20,0	(02) 0,81	16,3		●			●		●
20mm	TBD1-20M-04	TBF120M04	20,0	(04) 1,60	16,3		●			●		●
25mm	TBD1-25M-02	TBF125M02	25,0	(02) 0,81	22,0		●			●		
25mm	TBD1-25M-04	TBF125M04	25,0	(04) 1,60	22,0		●			●		●
25mm	TBD1-25M-08	TBF125M08	25,0	(08) 3,18	22,0		●			●		●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.



- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron				●		
Non-Ferrous		▲		●		
Stainless/High Temp				●		
Steel				●		
Hardened Material				▲		●
Composite				▲	●	

FLAT BOTTOM/ BACK DRAFT STYLE TBDS-WS

Straight Neck Holder (**METRIC**)

Use TBD1 & TBF1 Inserts Only

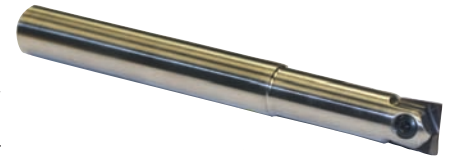



Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
8mm	TBDS-8M-59WS8	TBDS8M59WS8	8,0	48,0	151,9	8,0	10,5	TBD1 / FI-8M	STBN-4	K3 / T-10
16mm	TBDS-16M-63WS16	TBDS16M63WS16	16,0	54,9	162,1	16,0	13,9	TBD1 / FI-16M	STBN-5	K3 / T-10
20mm	TBDS-20M-68WS20	TBDS20M68WS20	20,0	62,9	175,0	20,0	18,0	TBD1 / FI-20M	STBN-6	K4 / T-20
25mm	TBDS-25M-74WS25	TBDS25M74WS25	25,0	71,8	189,9	25,0	17,3	TBD1 / FI-25M	STBN-7	K5 / T-25

FLAT BOTTOM/ BACK DRAFT STYLE TBDC-WS

Straight Neck Holder (**METRIC**)

Carbide Cored Shank

Use TBD1 & TBF1 Inserts Only

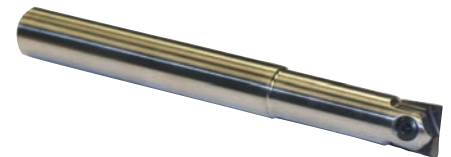

Size	Description	EDP Code	D	E	L	DS	DN	Insert	Screw	Wrench
8mm	TBDS-8M-59WS8	TBDS8M59WS8	8,0	48,0	151,9	8,0	10,5	TBD1 / FI-8M	STBN-4	K3 / T-10
16mm	TBDS-16M-63WS16	TBDS16M63WS16	16,0	54,9	162,1	16,0	13,9	TBD1 / FI-16M	STBN-5	K3 / T-10
20mm	TBDS-20M-68WS20	TBDS20M68WS20	20,0	62,9	175,0	20,0	18,0	TBD1 / FI-20M	STBN-6	K4 / T-20
25mm	TBDS-25M-74WS25	TBDS25M74WS25	25,0	71,8	189,9	25,0	17,3	TBD1 / FI-25M	STBN-7	K5 / T-25



RIGID-LOCK

Trouble Shooting

Problem	Solution	Problem	Solution	Problem	Solution	Problem	Solution	Problem	Solution
Insert is wearing prematurely	Decrease speed Increase feed Increase DOC	Insert is chipping	Use ZS26 grade Increase speed Decrease feed Decrease DOC Use Tapered Shank Use Neutral insert	Insert has built up edge	Increase speed Increase feed	Insert is wearing at center	Increase feed by 10% Decrease speed	Toolholder failure DOC	Reduce feed Decrease tool extension Reduce

RIGID-LOCK

Grade Description

Grades	Descriptions
C26S	Uncoated, tough, fine grain substrate with sharp edge. Ideal for plastics and soft materials that produce little or no heat.
ZS26	PVD AlTiN grade with a tough, fine grain substrate. FIRST CHOICE for general applications in steels, stainless, and high temp alloys. Excellent in low to high speeds and will handle interruptions and high feed rates. Coating provides highest resistance to oxidation, physical abrasion and chip welding. Dry machining capable.
ZS26S	Same as grade AT26 except with a sharper edge for light depths of cut in finishing operations. FIRST CHOICE for non-ferrous and composite materials at medium to high SFM.
CB400	PCBN tip brazed onto a carbide insert. To be used for roughing to finishing in hardened steels greater than 45 HRC such as bearing steel, hot and cold work tool steels, high-speed steels, die steels, case hardened steels, nitrided irons and some hard coatings.
DX200	CVD PCD coated grade. Excellent wear resistance in nonmetallic materials such as graphite, epoxy based resins and plastics. FIRST CHOICE in aluminum and composites at high SFM.

Chart 1

Feed, Speed and Diameter Information

Materials	Cast Iron		Steels				Stainless Steels		Nickel Based Alloys	Titanium	Aluminum
	Grey	Nodular	Low Carbon up to 240 BHN	High Carbon Medium Tensile 240-300 BHN	High Alloy Tool Steel 300-400	Hard Steels 48-65 HRC	300 Series	400 Series	Inconel Waspalloy Hastalloy	6AL 4V	6061 T6 7075 T6
Insert Grades	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26	ZS26S/C26S
Speed (SFPM)	500-1000	400-800	500-1000	400-800	300-600	125-300	300-700	400-800	100-200	200-300	1500-5000
Feed Rate (IPR)	.006/.020	.006/.020	.006/.016	.006/.016	.006/.016	.003/.009	.006/.012	.006/.014	.004/.010	.004/.011	.015/.035

Effective Cutting Diameter Information

The charts listed below are applicable when the depth of cut is less than the radius of the tool. The IPR can be increased as the DOC is reduced.

Chart 2 Select the effective diameter of the insert based on DOC

DOC	INSERT DIAMETER							
	0.250	0.312	0.375	0.500	0.625	0.750	1.000	1.250
0.020	0.136	0.153	0.169	0.196	0.220	0.242	0.280	0.314
0.050	0.200	0.229	0.255	0.300	0.339	0.374	0.436	0.490
0.075	0.229	0.267	0.300	0.357	0.406	0.450	0.527	0.594
0.100	0.245	0.292	0.332	0.400	0.458	0.510	0.600	0.678
0.125	0.250	0.306	0.354	0.433	0.500	0.559	0.661	0.750
0.156		0.312	0.370	0.463	0.541	0.609	0.726	0.826
0.188			0.375	0.484	0.573	0.650	0.781	0.893
0.250				0.500	0.612	0.707	0.866	1.000
0.312					0.625	0.739	0.927	1.082
0.375						0.750	0.968	1.146
0.500							1.000	1.225
0.625								1.250

$$RPM = SFM \times 3.82 / \text{Effective cutting diameter}$$




Chart 3 Feed - Multiply factor below times IPR in Chart 1 for adjusted IPR

DOC	INSERT DIAMETER							
	0.250	0.312	0.375	0.500	0.625	0.750	1.000	1.250
0.020	3.356	3.953	4.330	5.000	5.590	6.124	7.071	7.906
0.050	2.236	2.500	2.739	3.162	3.536	3.873	4.472	5.000
0.075	1.826	2.041	2.236	2.582	2.887	3.162	3.651	4.082
0.100	1.581	1.768	1.936	2.236	2.500	2.739	3.162	3.536
0.125	1.414	1.581	1.732	2.000	2.236	2.449	2.828	3.162
0.156		1.415	1.550	1.790	2.002	2.193	2.532	2.831
0.188			1.414	1.633	1.826	2.000	2.309	2.582
0.250				1.414	1.581	1.732	2.000	2.236
0.312					1.415	1.550	1.790	2.002
0.375						1.414	1.633	1.826
0.500							1.414	1.581
0.625								1.414

EXAMPLE

EFFECTIVE DIAMETER		
ACTUAL DIAMETER	DOC	EFFECTIVE DIAMETER
.750	.100	.510


EXAMPLE

ADJUSTED FEED RATE FOR ABOVE		
CHART 1 IPR	CHART 3 MULTIPLIER	ADJUSTED IPR
.008	2.739	.022



BALLNOSE

Shallow Cutting with Rigid-Lock Ball Nose End Mill

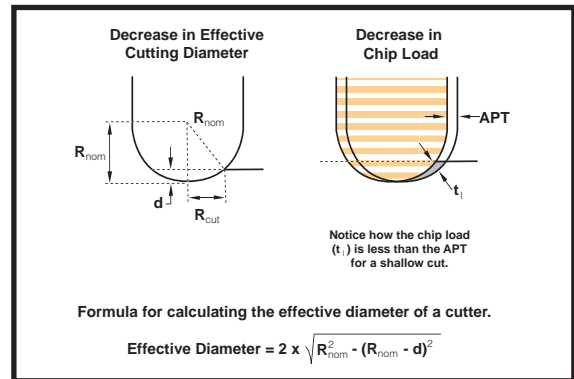

BALLNOSE

Using your Rigid-Lock Ball Nose End Mill

Use Anti-seize grease every time an insert is changed.
 Use positive geometry inserts on stainless, aluminum, titanium and Inconel.
 Climb mill whenever possible.
 Step over should be greater than depth of cut
 Use TBF1 inserts if work piece has a draft angle on the walls. TBD1 inserts are for work pieces with straight walls.
 Balance chipload, RPM, feed rate, tool extension, and material.
 TBF1 and TBD1 inserts cannot plunge, ramp at 1° to 2° angle maximum.
 1/4" and 5/16" endmills have a maximum feed rate of .006 to .008 per revolution and a .015 to .018 depth of cut.

Recommended torque specifications for Rigid-Lock insert screws

	INSERT SIZE			TORQUE	
	inch	metric	wrench	Nm/inch lbs.	anti-seize
STBN-1	1/4"	1/4"	K2/T-8	Manual	Yes
STBN-2	5/16"	8mm	K3/T-10	Manual	Yes
STBN-3	3/8"	10mm	K3/T-10	Manual	Yes
STBN-4	1/2"	12mm	K35/T-15	6.0/53	Yes
STBN-5	5/8"	16mm	K35/T-15	6.2/55	Yes
STBN-6/TS352	3/4"	20mm	K4/T-20	6.2/55	Yes
STBN-7/TS41	1"	25mm	K5/T-25	6.5/58	Yes
STBN-8/TS50	1-1/4"	32mm	K6/T-30	6.5/58	Yes
STBN-8	1-1/2"	38mm	K6/T-30	6.5/58	Yes
STBN-8	2"	55mm	K8/T-40	6.5/58	Yes
STBN-10	2-1/2"	63mm	K8/T-40	6.5/58	Yes

Using your Rigid-Lock Ball Nose End Mill for Roughing - TBXR

Adjust to your own cutting conditions.




Ex: Cutting 4140 material, 3/4 diameter ball nose insert, .010 chip load and .375 D.O.C.

Chip load per tooth: Should be a maximum of .007-.010.

Maximum Depth of Cut: Equal to half the radius of the insert.

Ex. If you are using a 1" diameter insert, then the D.O.C. would be up too 1/2".

For optimal tool life of our ballnose system, we recommend lighter feed rates and higher surface speeds.

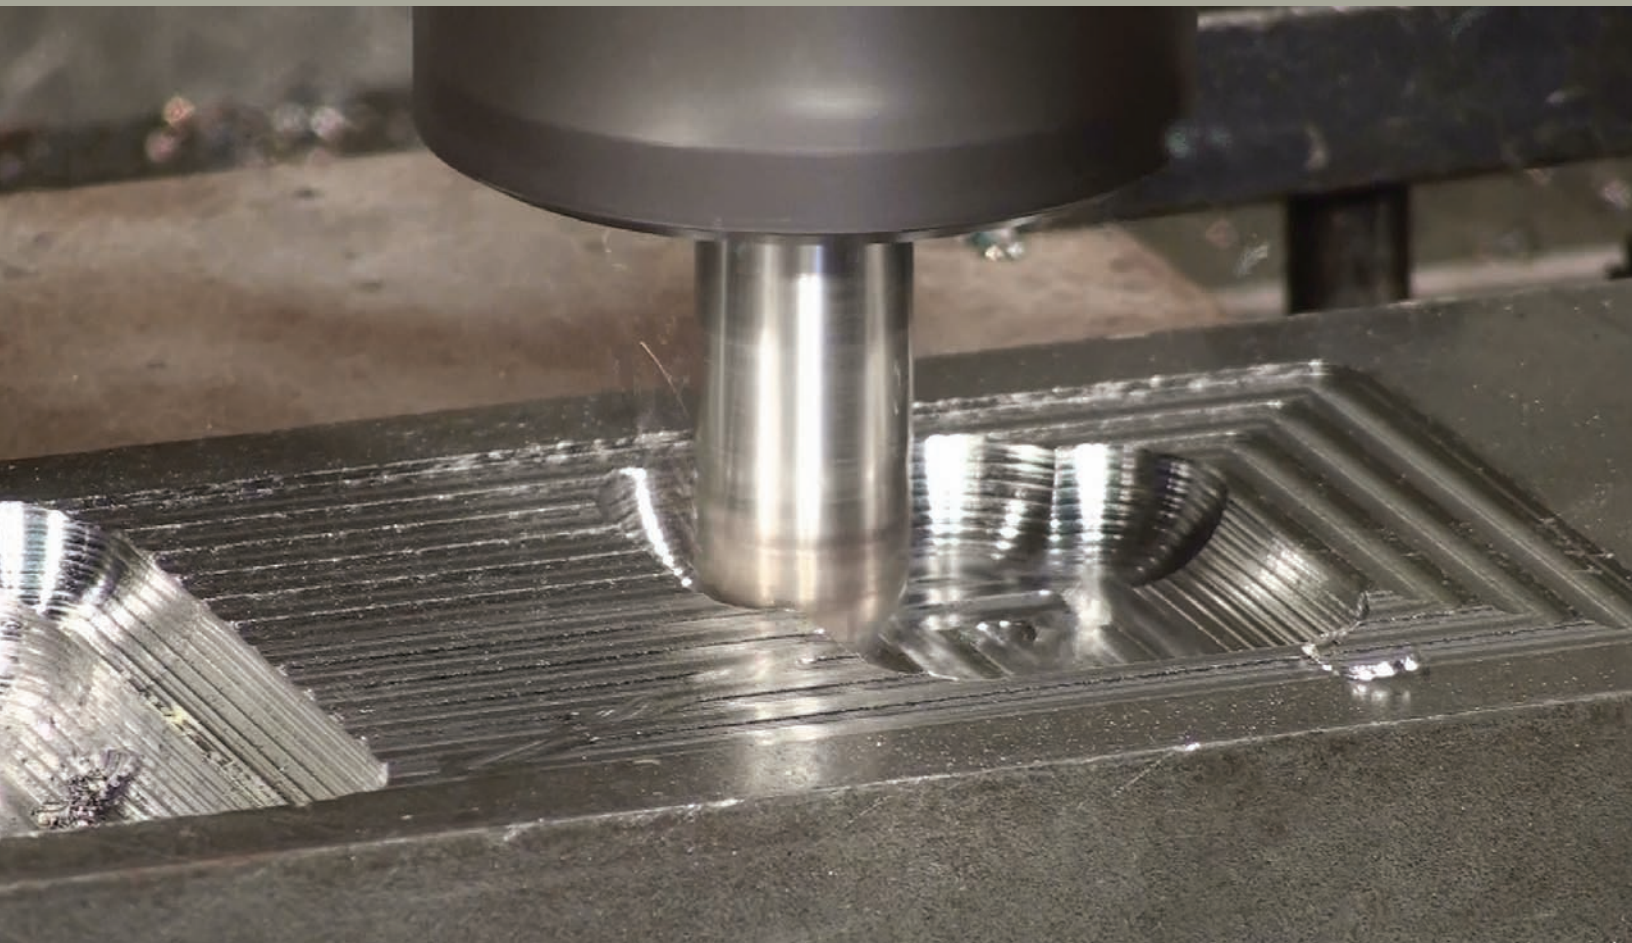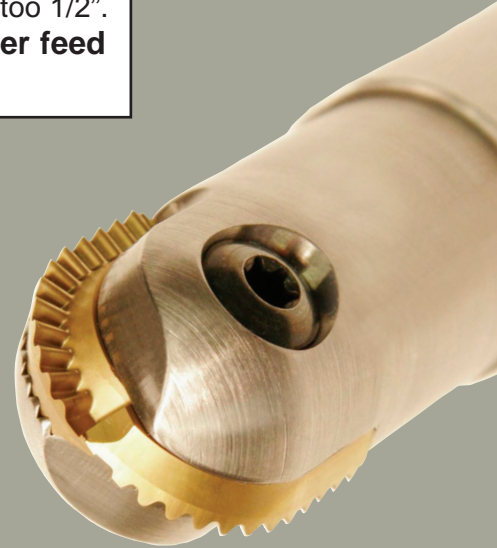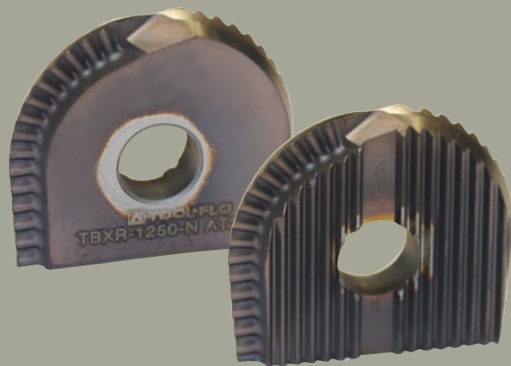



TOOL-FLO




BANTAM


Small diameter
Threading • Boring • Grooving



Bantam Boring Bar Nomenclature Chart

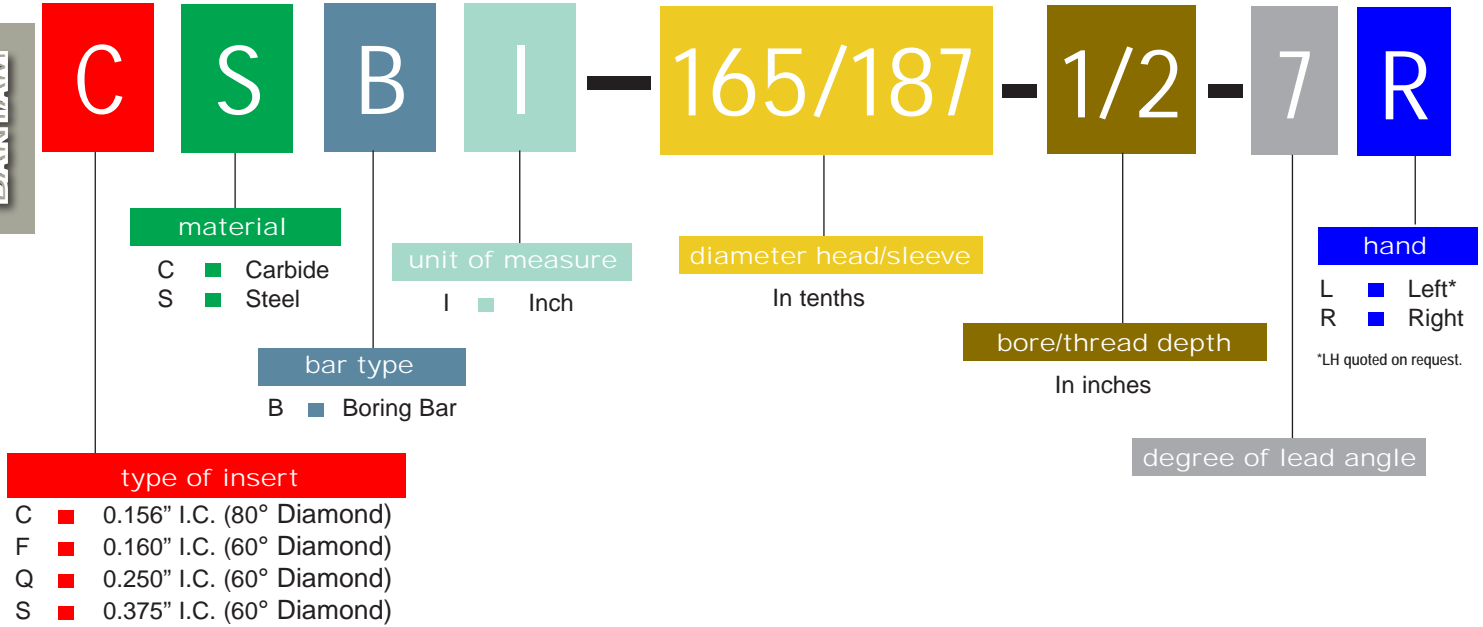

Bantam Grooving/Threading Bar Nomenclature Chart


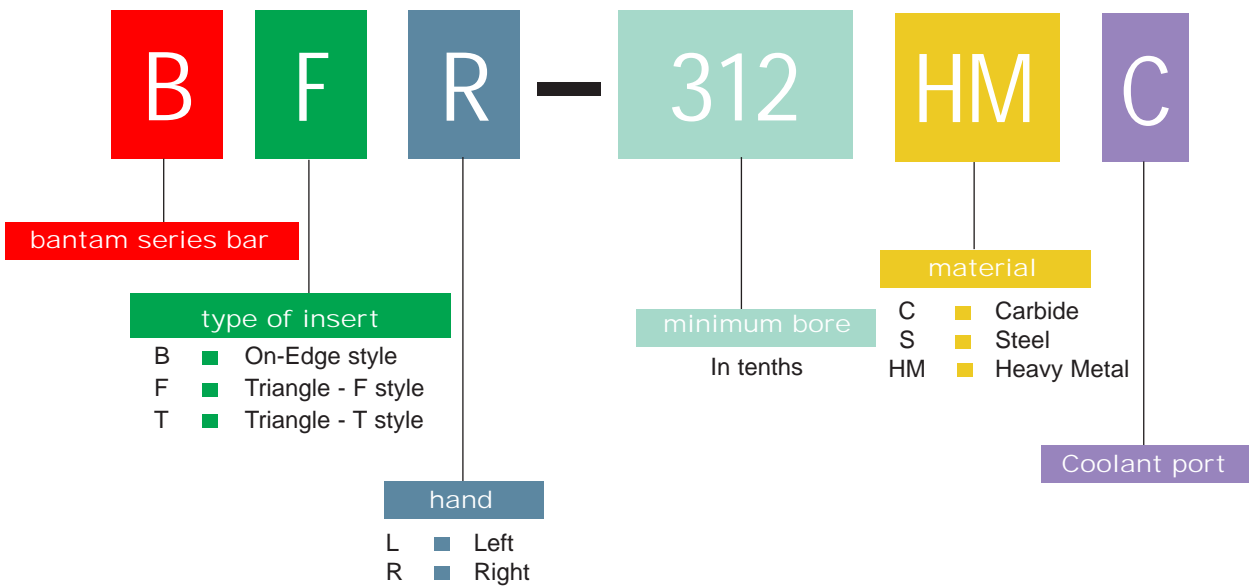




MINIMUM BORE .180

BORING

CDCD


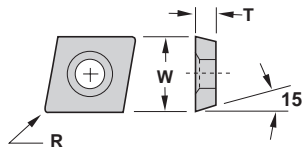


Description	EDP Code	T	W	R					
					C22	GP22	GP4	AC22	AC4
CDCD-500	9BCD500	.040	.156	.002	●	●	●	●	●
CDCD-505	9BCD505	.040	.156	.007	●	●	●	●	●
CDCD-51	9BCD51	.040	.156	.015	●	●	●	●	●

Uncoated		TiN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
●	●	●	●	●	●

BORING - Positive Rake

CDCG

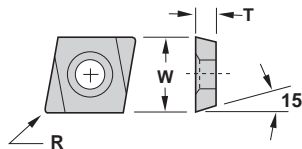

Description	EDP Code	T	W	R					
					C22	GP22	GP4	AC22	AC4
CDCG-500L	9BCG500L	.040	.156	.002	●	●	●	●	●
CDCG-505L	9BCG505L	.040	.156	.007	●	●	●	●	●
CDCG-51L	9BCG51L	.040	.156	.015	●	●	●	●	●


Uncoated		TiN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Cast Iron	●	▲			
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			


CCBI/CSBI

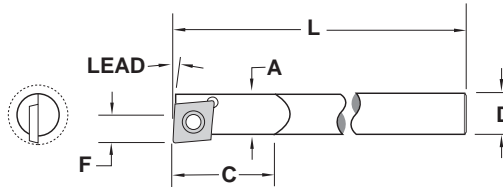

Description	EDP Code	Stk	Material	Insert	Lead	A	D	L	C	F	Min Bore	Screw*
CSBI-165/187-1/2-7R	9BCS16187R	●	Steel	CDCD/G	7°	.165	.187	2.50	.500	.094	.180	TS1
CCBI-165/156-6-7R	9BCC16157R	●	Carbide	CDCD/G	7°	.165	.156	6.00	---	.094	.180	TS1
CSBI-180/187-2 1/2-5R	9BCS18185R	●	Steel	CDCD/G	5°	.180	.187	2.50	.500	.104	.208	TS1
CCBI-180/187-4-5R	9BCC18185R	●	Carbide	CDCD/G	5°	.189	.187	4.00	---	.104	.208	TS1
CSBI-250-3-5R	9BCS255R	●	Steel	CDCD/G	5°	.260	.250	3.00	---	.145	.285	TS1
CCBI-250-4-5R	9BCC255R	●	Carbide	CDCD/G	5°	.258	.250	4.00	---	.145	.285	TS1
CSBI-250-3-0R	9BCS250R	●	Steel	CDCD/G	0°	.260	.250	3.00	---	.152	.292	TS1
CCBI-250-4-0R	9BCC250R	●	Carbide	CDCD/G	0°	.258	.250	4.00	---	.152	.292	TS1

*TS1 screw uses K05 wrench

CCBI/CSBI

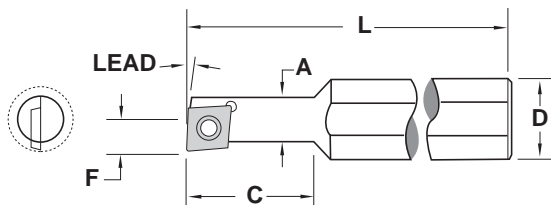



Description	EDP Code	Stk	Material	Insert	Lead	A	D	L	C	F	Min Bore	Screw*
CSBI-180/500-1/2-5R	9BCS18505R	●	Steel	CDCD/G	5°	.180	.500	2.75	.500	.104	.208	TS1
CCBI-180/500-7/8-5R	9BCC18505R	●	Carbide	CDCD/G	5°	.189	.500	2.37	.875	.104	.208	TS1
CSBI-250/500-3/4-5R	9BCS25505R	●	Steel	CDCD/G	5°	.260	.500	2.75	.750	.145	.285	TS1
CCBI-250/500-1 1/4-5R	9BCC25505R	●	Carbide	CDCD/G	5°	.258	.500	2.75	1.25	.145	.285	TS1
CSBI-250/500-3/4-0R	9BCS25500R	●	Steel	CDCD/G	0°	.260	.500	2.75	.750	.152	.292	TS1
CCBI-250/500-1 1/4-0R	9BCC25500R	●	Carbide	CDCD/G	0°	.258	.500	2.75	1.25	.152	.292	TS1

*TS1 screw uses K05 wrench



MINIMUM BORE .250


BORING
BSBR



	Uncoated	TIN Coated	AlTiN Coated
C22	GP22	GP4	AC22
		●	AC4

Description	EDP Code	R
BSBR-005	9BSBR	.005

BSR

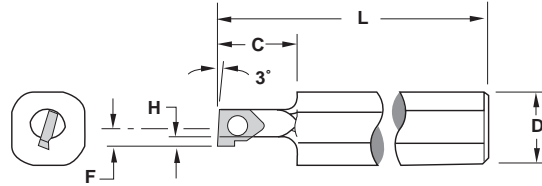


Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw*
BSR-250S	9B250S	●	Steel	BSBR		5.000	.500	.500	.050	.125	.250	TS1
BSR-250SC	9B250SC	●	Steel	BSBR	✓	5.000	.500	.500	.050	.125	.250	TS1

*TS1 screw uses K05 wrench
** Dimension over sharp point

MINIMUM BORE .275 - .360



BORING
TDAB



	Uncoated	TIN Coated	AlTiN Coated
C22	GP22	GP4	AC22
	●	●	AC4

Description	EDP Code	R	T
TDAB-505	9BDB505	.007	.047
TDAB-51	9BDB51	.015	.047

BORING - Positive Rake
TDCG



	Uncoated	TIN Coated	AlTiN Coated
C22	GP22	GP4	AC22
	●	●	AC4



Description	EDP Code	R	T
TDCG-505L	9BDG505L	.007	.047
TDCG-51L	9BDG51L	.015	.047

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●	▲			
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			

FCBI/FSBI

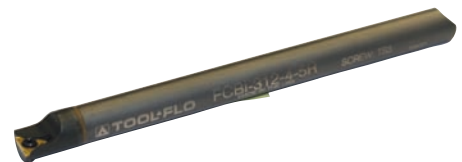


Description	EDP Code	Stk	Material	Insert	Lead	A	D	L	F	Min. Bore	Screw*
FCBI-187-4-5R	9BFC185R	●	Carbide	TDAB/TDCG	5°	.203	.187	4.000	.126	.275	TS3
FCBI-250-4-5R	9BFC255R	●	Carbide	TDAB/TDCG	5°	.250	.250	4.000	.156	.300	TS3
FSBI-250-4-5R	9BFS255R	●	Steel	TDAB/TDCG	5°	.260	.250	4.000	.156	.300	TS3
FCBI-312-4-5R	9BFC315R	●	Carbide	TDAB/TDCG	5°	.312	.312	4.000	.187	.360	TS3

*TS3 screw uses K1 wrench




MINIMUM BORE .312 BORING BFR3

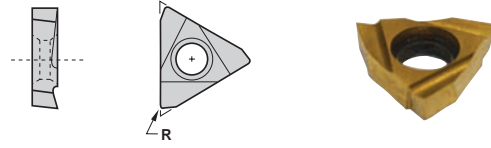

Uncoated	TIN Coated	AITIN Coated
C22	GP22	GP4
	AC22	AC4

Description	EDP Code	R	
BFR3-BR	9BFR3B		.005


BFR3

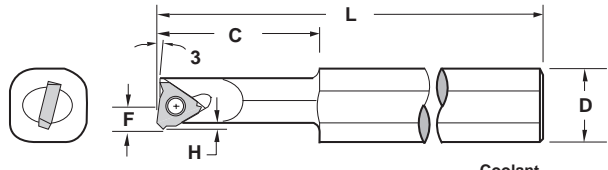

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F	Min. Bore	Screw*
BFR-312S	9BF312S	●	Steel	BFR3		5.000	.500	.500	.050	.150	.312	TS25
BFR-312SC	9BF312SC	●	Steel	BFR3	✓	5.000	.500	.500	.050	.150	.312	TS25
BFR-312HM	9BF312HM	●	Heavy Metal	BFR3		5.000	.500	1.250	.050	.150	.312	TS25
BFR-312HMC	9BF312HMC	●	Heavy Metal	BFR3	✓	5.000	.500	1.250	.050	.150	.312	TS25

*TS25 screw uses K2 wrench


MINIMUM BORE .312 - .440 BORING BNBR/L

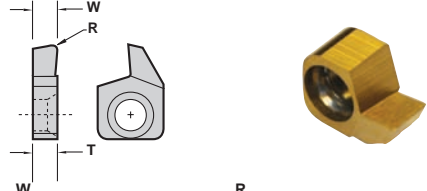

Uncoated	TIN Coated	AITIN Coated
C22	GP22	GP4
	AC22	AC4

Description	EDP Code	W	R	T
BNBR-125W	9BB125R	.125	.005/.010	.137
BNBL-125W	9BB125L	.125	.005/.010	.137

Back Turning BNPR/L

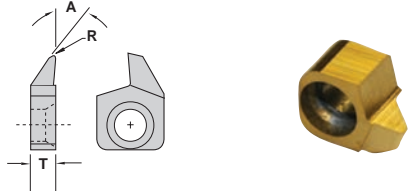

Uncoated	TIN Coated	AITIN Coated
C22	GP22	GP4
	AC22	AC4


Description	EDP Code	A	R	T
BNPR-015R	9BP015R	45°	.015	.137
BNPL-015R	9BP015L	45°	.015	.137

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●	▲		
Non-Ferrous	●	▲		
Stainless/High Temp	●	▲		
Steel	●	▲		

BB

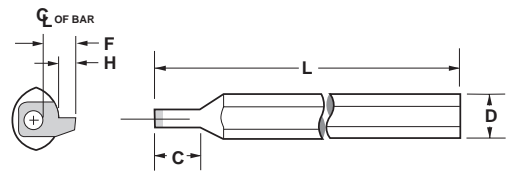


Description	EDP Code	Stk	Material	Insert	L	D	C	F	H	Min. Bore	Screw*
BB-312S	9B312S	●	Steel	BNBR/L BNPR/L	5.000	.500	.750	.156	.070	.312	TS25
BB-344S	9B344S	●	Steel	BNBR/L BNPR/L	5.000	.500	.750	.152	.070	.344	TS25
BB-375S	9B375S	●	Steel	BNBR/L BNPR/L	5.000	.500	.750	.1625	.070	.375	TS25
BB-440S	9B440S	●	Steel	BNBR/L BNPR/L	5.000	.500	1.000	.190	.070	.440	TS25
BB-312HM	9B312HM	●	Heavy Metal	BNBR/L BNPR/L	5.000	.500	1.000	.156	.070	.312	TS25
BB-344HM	9B344HM	●	Heavy Metal	BNBR/L BNPR/L	5.000	.500	1.000	.152	.070	.344	TS25
BB-375HM	9B375HM	●	Heavy Metal	BNBR/L BNPR/L	5.000	.500	1.250	.1625	.070	.375	TS25
BB-440HM	9B440HM	●	Heavy Metal	BNBR/L BNPR/L	5.000	.500	1.500	.190	.070	.440	TS25
BB-312C	9B312C	●	Carbide	BNBR/L BNPR/L	5.000	.500	1.250	.156	.070	.312	TS25
BB-440C	9B440C	●	Carbide	BNBR/L BNPR/L	5.000	.500	1.500	.190	.070	.440	TS25

*TS25 screw uses K2 wrench




MINIMUM BORE .400 BORING BFR4



Description	EDP Code	R
BFR4-BR	9BFR4B	.005

Uncoated		TIN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
	●	●			


BFR4

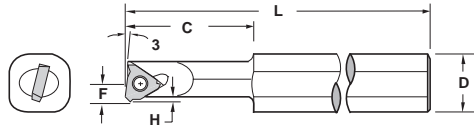

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw*
BFR-400S	9BF400S	●	Steel	BFR4		5.000	.500	1.000	.050	.237	.400	TS25
BFR-400SC	9BF400SC	●	Steel	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HM	9BF400HM	●	Heavy Metal	BFR4		5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HMC	9BF400HMC	●	Heavy Metal	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25

*TS25 screw uses K2 wrench
** Dimension over sharp point


MINIMUM BORE .438 BORING TPCB

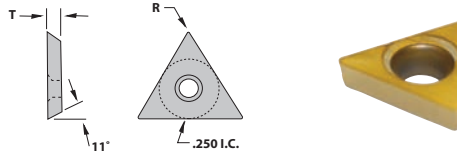

Description	EDP Code	R	T
TPCB-2205	9BPB2205	.007	.096
TPCB-221	9BPB221	.015	.096

Uncoated		TIN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
	●	●			

BORING - Positive Rake TPCG

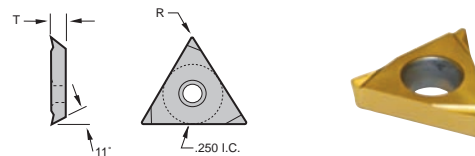

Description	EDP Code	R	T
TPCG-2205L	9BPG2205	.007	.096
TPCG-221L	9BPG221L	.015	.096


Uncoated		TIN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
	●	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●	▲			
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			

QCBI/QSBI



Description	EDP Code	Stk	Material	Insert	Lead	A	D	L	F	Min. Bore	Screw*
QSBI-375-5-5R	9BQS375R	●	Steel	TPCB/G	5°	.385	.375	5.000	.221	.438	TS6
QCBI-375-6-5R	9BQC375R	●	Carbide	TPCB/G	5°	.390	.375	6.000	.211	.438	TS6
QCBI-500-8-5R	9BQC505R	●	Carbide	TPCB/G	5°	.510	.500	8.000	.296	.563	TS6


*TS6 screw uses K3 wrench



BANTAM


MINIMUM BORE .500

BORING
BTBR/L

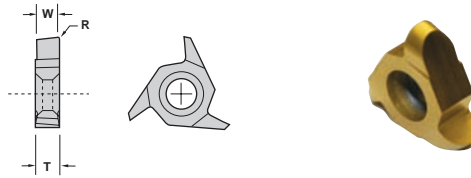

Description	EDP Code	W	R	T	Coating				
					C22	GP22	GP4	AC22	AC4
BTBR-125	9BTB125R	.125	.005/.010	.130		●	●		
BTBL-125	9BTB125L	.125	.005/.010	.130		●	●		

BTR/L

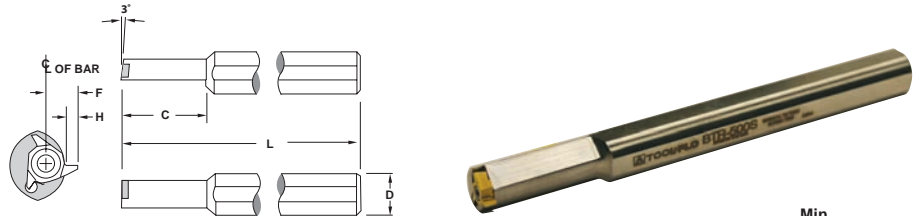


Description	EDP Code	Stk	Material	Insert	L	D	C	H	F	Min. Bore	Screw*
BTL-500S	9BTL500S	●	Steel	BTBL	5.000	.500	1.250	.075	.225	.500	TS25
BTR-500HM	9BTR500HM	●	Heavy Metal	BTBR	5.000	.500	1.500	.075	.225	.500	TS25
BTL-500HM	9BTL500HM	●	Heavy Metal	BTBL	5.000	.500	1.500	.075	.225	.500	TS25

*TS25 screw uses K2 wrench
** Dimension over sharp point

MINIMUM BORE .250

GROOVING
BSGR




Description	EDP Code	W	D	Coating				
				C22	GP22	GP4	AC22	AC4
BSGR-015W	9BSG015R	.015	.030			●		
BSGR-020W	9BSG020R	.020	.050			●		
BSGR-031W	9BSG031R	.031	.050			●		
BSGR-047W	9BSG047R	.047	.050			●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●	▲			
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			


BSR

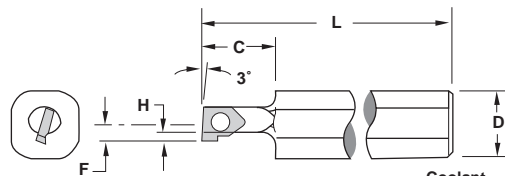

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw
BSR-250SC	9B250SC	●	Steel	BSGR	✓	5.000	.500	.500	.050	.157	.250	TS20


MINIMUM BORE .312

GROOVING
BFR3



Description	EDP Code	W	D	Coating				
				C22	GP22	GP4	AC22	AC4
BFR3-015W	9BFR3G015	.015	.020			●		
BFR3-020W	9BFR3G020	.020	.030			●		
BFR3-031W	9BFR3G031	.031	.035			●		

BFR3



Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F	Min. Bore	Screw*
BFR-312SC	9BF312SC	●	Steel	BFR3	✓	5.000	.500	1.000	.050	.150	.312	TS25
BFR-312HM	9BF312HM	●	Heavy Metal	BFR3		5.000	.500	1.000	.050	.150	.312	TS25
BFR-312HMC	9BF312HMC	●	Heavy Metal	BFR3	✓	5.000	.500	1.000	.050	.150	.312	TS25


*TS25 screw uses K2 wrench

BANTAM




MINIMUM BORE .312 - .440

GROOVING
BNGR/L



Description	EDP Code	W	D	T	Coating Options				
					C22	GP22	GP4	AC22	AC4
BNGR-031W	9BG031R	.031	.050	.137					
BNGL-031W	9BG031L	.031	.050	.137	●	●	●		
BNGR-047W	9BG047R	.047	.070	.137	●	●	●		
BNGL-047W	9BG047L	.047	.070	.137	●	●	●		
BNGR-062W	9BG062R	.062	.070	.137	●	●	●		
BNGL-062W	9BG062L	.062	.070	.137	●	●	●		
BNGR-094W	9BG094R	.094	.070	.137	●	●	●		
BNGL-094W	9BG094L	.094	.070	.137	●	●	●		
BNGR-125W	9BG125R	.125	.070	.137	●	●	●		
BNGL-125W	9BG125L	.125	.070	.137	●	●	●		

GROOVING - Full Nose Radius BNRR/L




Description	EDP Code	W	R	D	T	Coating Options				
						C22	GP22	GP4	AC22	AC4
BNRR-031W	9BR031R	.031	.0155	.050	.137					
BNRL-031W	9BR031L	.031	.0155	.050	.137	●	●	●		
BNRR-047W	9BR047R	.047	.0235	.070	.137	●	●	●		
BNRL-047W	9BR047L	.047	.0235	.070	.137	●	●	●		
BNRR-062W	9BR062R	.062	.0310	.070	.137	●	●	●		
BNRL-062W	9BR062L	.062	.0310	.070	.137	●	●	●		
BNRR-094W	9BR094R	.094	.0470	.070	.137	●	●	●		
BNRL-094W	9BR094L	.094	.0470	.070	.137	●	●	●		
BNRR-125W	9BR125R	.125	.0625	.070	.137	●	●	●		
BNRL-125W	9BR125L	.125	.0625	.070	.137	●	●	●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C22	GP22	GP4	AC22	AC4
Cast Iron		●	▲		
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			

BB


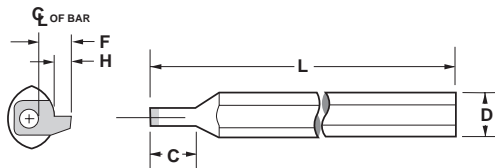


Description	EDP Code	Stk	Material	Insert	L	D	C	F	H	Min. Bore	Screw*
BB-312S	9B312S	●	Steel	BNBR/L BNRR/L	5.000	.500	.750	.156	.070	.312	TS25
BB-344S	9B344S	●	Steel	BNBR/L BNRR/L	5.000	.500	.750	.152	.070	.344	TS25
BB-375S	9B375S	●	Steel	BNBR/L BNRR/L	5.000	.500	.750	.1625	.070	.375	TS25
BB-440S	9B440S	●	Steel	BNBR/L BNRR/L	5.000	.500	1.000	.190	.070	.440	TS25
BB-312HM	9B312HM	●	Heavy Metal	BNBR/L BNRR/L	5.000	.500	1.000	.156	.070	.312	TS25
BB-344HM	9B344HM	●	Heavy Metal	BNBR/L BNRR/L	5.000	.500	1.000	.152	.070	.344	TS25
BB-375HM	9B375HM	●	Heavy Metal	BNBR/L BNRR/L	5.000	.500	1.250	.1625	.070	.375	TS25
BB-440HM	9B440HM	●	Heavy Metal	BNBR/L BNRR/L	5.000	.500	1.500	.190	.070	.440	TS25
BB-312C	9B312C	●	Carbide	BNBR/L BNRR/L	5.000	.500	1.250	.156	.070	.312	TS25
BB-440C	9B440C	●	Carbide	BNBR/L BNRR/L	5.000	.500	1.500	.190	.070	.440	TS25

*TS25 screw uses K2 wrench




MINIMUM BORE .400 GROOVING BFR4

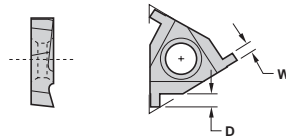

Uncoated	TIN Coated	ATIN Coated
C22	GP22	AC22
	GP4	AC4

Description	EDP Code	W	D
BFR4-015W	9BFR4G015	.015	.035
BFR4-020W	9BFR4G020	.020	.035
BFR4-031W	9BFR4G031	.031	.035



BFR4

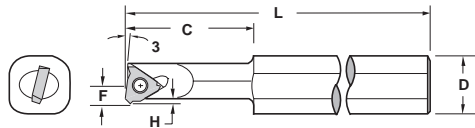

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw
BFR-400S	9BF400S	●	Steel	BFR4		5.000	.500	1.000	.050	.237	.400	TS25
BFR-400SC	9BF400SC	●	Steel	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HM	9BF400HM	●	Heavy Metal	BFR4		5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HMC	9BF400HMC	●	Heavy Metal	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25

*TS25 screw uses K2 wrench
** Dimension over sharp point


MINIMUM BORE .500 GROOVING BTGR/L



Uncoated	TIN Coated	ATIN Coated
C22	GP22	AC22
	GP4	AC4

Description	EDP Code	W	D	T
BTGR-031W	9BTG031R	.031	.050	.130
BTGL-031W	9BTG031L	.031	.050	.130
BTGR-047W	9BTG047R	.047	.070	.130
BTGL-047W	9BTG047L	.047	.070	.130
BTGR-062W	9BTG062R	.062	.075	.130
BTGL-062W	9BTG062L	.062	.075	.130
BTGR-094W	9BTG094R	.094	.075	.130
BTGL-094W	9BTG094L	.094	.075	.130
BTGR-125W	9BTG125R	.125	.075	.130
BTGL-125W	9BTG125L	.125	.075	.130

GROOVING - Full Nose Radius BTRR/L

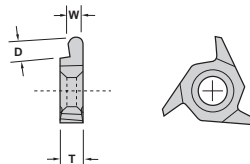

Uncoated	TIN Coated	ATIN Coated
C22	GP22	AC22
	GP4	AC4


Description	EDP Code	W	R	D	T
BTRR-031W	9BTR031R	.031	.0155	.050	.130
BTRL-031W	9BTR031L	.031	.0155	.050	.130
BTRR-047W	9BTR047R	.047	.0235	.070	.130
BTRL-047W	9BTR047L	.047	.0235	.070	.130
BTRR-062W	9BTR062R	.062	.0310	.075	.130
BTRL-062W	9BTR062L	.062	.0310	.075	.130
BTRR-094W	9BTR094R	.094	.0470	.075	.130
BTRL-094W	9BTR094L	.094	.0470	.075	.130
BTRR-125W	9BTR125R	.125	.0625	.075	.130
BTRL-125W	9BTR125L	.125	.0625	.075	.130

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●
Non-Ferrous	●
Stainless/High Temp	●
Steel	●

BTR/L


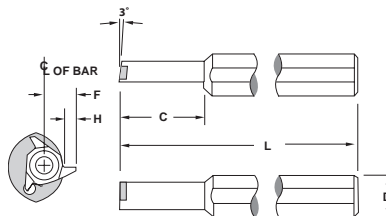


Description	EDP Code	Stk	Material	Insert	L	D	C	H	F	Min. Bore	Screw*
BTR-500S	9BTR500S	●	Steel	BTBR/BTRR	5.000	.500	1.250	.075	.225	.500	TS25
BTL-500S	9BTL500S	●	Steel	BTBL/BTRL	5.000	.500	1.250	.075	.225	.500	TS25
BTR-500HM	9BTR500HM	●	Heavy Metal	BTBR/BTRR	5.000	.500	1.500	.075	.225	.500	TS25
BTL-500HM	9BTL500HM	●	Heavy Metal	BTBL/BTRL	5.000	.500	1.500	.075	.225	.500	TS25

*TS25 screw uses K2 wrench





MINIMUM BORE .250 THREADING - NPT BSVR





Description	EDP Code	TPI	E	Coating					
				C22	GP22	GP4	AC22	AC4	
BSVR-14NPT	9BSV14R	14	.045	Uncoated	TIN Coated	AITIN Coated			
BSVR-18NPT	9BSV18R	18	.033	●	●				
BSVR-27NPT	9BSV27R	27	.026	●	●				

THREADING - UN BSVR



Description	EDP Code	TPI	E	Coating					
				C22	GP22	GP4	AC22	AC4	
BSVR-12UN	9BSU12R	12	.040	Uncoated	TIN Coated	AITIN Coated			
BSVR-16UN	9BSU16R	16	.031	●	●				
BSVR-18UN	9BSU18R	18	.029	●	●				
BSVR-20UN	9BSU20R	20	.026	●	●				
BSVR-24UN	9BSU24R	24	.023	●	●				
BSVR-28UN	9BSU28R	28	.021	●	●				
BSVR-32UN	9BSU32R	32	.019	●	●				

THREADING - 55°/60° V BSVR




Description	EDP Code	TPI	R/F	E	A	Coating				
						C22	GP22	GP4	AC22	AC4
BSVR-55	9BSV55R	16-48	.003F	.039	55°			●		
BSVR-60	9BSV60R	16-48	.003R	.039	60°			●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron			●		
Non-Ferrous		●			
Stainless/High Temp		●			
Steel		●			


BSR

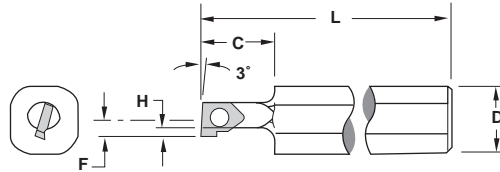

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw*
BSR-250SC	9B250SC	●	Steel	BSVR	✓	5.000	.500	.500	.050	.157	.250	TS1


*TS1 screw uses K05 wrench
** Dimension over sharp point

MINIMUM BORE .312 THREADING - 60° V BHV



Description	EDP Code	TPI	F	Coating					
				C22	GP22	GP4	AC22	AC4	
BHV-002	9BHV002	16-48	.002	Uncoated	TIN Coated	AITIN Coated			

BHR

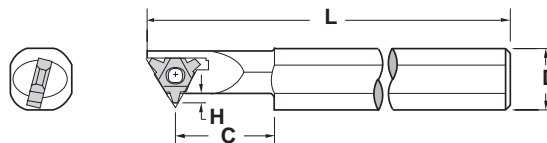


Description	EDP Code	Stk	Material	Insert	L	D	C	H	Min. Bore	Screw*
BHR-312HM	9BHR312HM	●	Heavy Metal	BHV	4.000	.500	1.000	.060	.312	TS3

*TS3 screw uses K1 wrench




MINIMUM BORE .312 THREADING - NPT BFR3

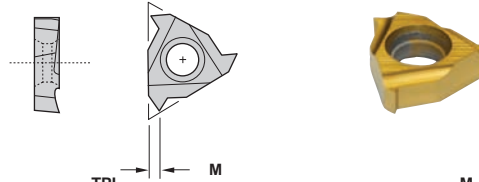

Description	EDP Code	TPI	M	Coating				
				C22	GP22	GP4	AC22	AC4
BFR3-18NPT	9BFR3V18	18	.033		●	●		
BFR3-27NPT	9BFR3V27	27	.026		●	●		

THREADING - UN BFR3

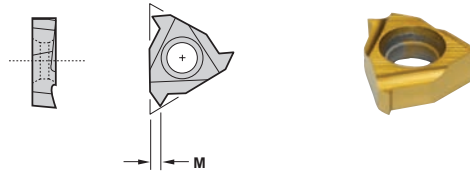


Description	EDP Code	TPI	M	Coating				
				C22	GP22	GP4	AC22	AC4
BFR3-20UN	9BFR3U20	20	.026			●		
BFR3-24UN	9BFR3U24	24	.026			●		
BFR3-28UN	9BFR3U28	28	.021			●		
BFR3-32UN	9BFR3U32	32	.019	●	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron		●			
Non-Ferrous		●			
Stainless/High Temp					
Steel		●			

THREADING - 55°/60° V BFR3

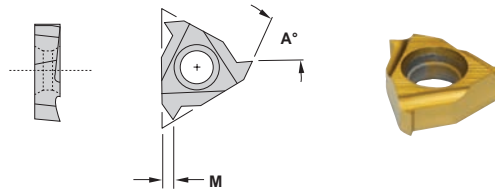

Description	EDP Code	TPI	M	A	Coating				
					C22	GP22	GP4	AC22	AC4
BFR3-55V	9BFR3V55	20-48	.028	55°					
BFR3-60V	9BFR3V60	27-48	.031	60°		●	●		

BFR3




Description	EDP Code	Stk	Material	Insert	Coolant		L	D	C	H	F	Min. Bore	Screw*
					Port								
BFR-312S	9BF312S	●	Steel	BFR3			5.000	.500	.500	.050	.150	.312	TS25
BFR-312SC	9BF312SC	●	Steel	BFR3	✓		5.000	.500	.500	.050	.150	.312	TS25
BFR-312HM	9BF312HM	●	Heavy Metal	BFR3			5.000	.500	1.250	.050	.150	.312	TS25
BFR-312HMC	9BF312HMC	●	Heavy Metal	BFR3	✓		5.000	.500	1.250	.050	.150	.312	TS25

*TS25 screw uses K2 wrench



MINIMUM BORE .312 - .440


THREADING - NPT
BNVR/L



Description	EDP Code	TPI	E	T	Uncoated		TiN Coated		AlTiN Coated	
					C22	GP22	GP4	AC22	AC4	
BNVR-14NPT	9BNP14R	14	.040	.137		●	●			
BNVL-14NPT	9BNP14L	14	.040	.137		●	●			
BNVR-18NPT	9BNP18R	18	.030	.137		●	●			
BNVL-18NPT	9BNP18L	18	.030	.137		●	●			
BNVR-27NPT	9BNP27R	27	.030	.137		●	●			
BNVL-27NPT	9BNP27L	27	.030	.137		●	●			


MINIMUM BORE .312 - .440

THREADING - UN
BNVR/L



Description	EDP Code	TPI	E	T	Uncoated		TiN Coated		AlTiN Coated	
					C22	GP22	GP4	AC22	AC4	
BNVR-12UN	9BNV12R	12	.040	.137		●	●			
BNVL-12UN	9BNV12L	12	.040	.137		●	●			
BNVR-16UN	9BNV16R	16	.031	.137		●	●			
BNVL-16UN	9BNV16L	16	.031	.137		●	●			
BNVR-18UN	9BNV18R	18	.031	.137		●	●			
BNVL-18UN	9BNV18L	18	.031	.137		●	●			
BNVR-20UN	9BNV20R	20	.030	.137		●	●			
BNVL-20UN	9BNV20L	20	.030	.137		●	●			
BNVR-24UN	9BNV24R	24	.030	.137		●	●			
BNVL-24UN	9BNV24L	24	.030	.137		●	●			
BNVR-28UN	9BNV28R	28	.030	.137		●	●			
BNVL-28UN	9BNV28L	28	.030	.137		●	●			
BNVR-32UN	9BNV32R	32	.030	.137		●	●			
BNVL-32UN	9BNV32L	32	.030	.137		●	●			

THREADING - 60° V
BNVR/L




Description	EDP Code	TPI	F	E	T	Uncoated		TiN Coated		AlTiN Coated	
						GFI	C22	GP22	GP4	AC22	AC4
BNVR-60	9BNV60R	18-40	.003F	.095	.137	●	●	●	●		●
BNVL-60	9BNV60L	18-40	.003F	.095	.137	●	●	●	●		●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	Uncoated	TiN Coated	AlTiN Coated
Cast Iron		●	
Non-Ferrous		●	
Stainless/High Temp		●	
Steel		●	

BB

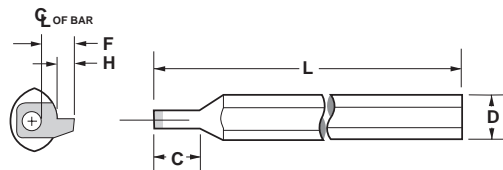


Description	EDP Code	Stk	Material	Insert	L	D	C	F	H	Min. Bore	Screw*
BB-312S	9B312S	●	Steel	BNVR/L	5.000	.500	.750	.156	.070	.312	TS25
BB-344S	9B344S	●	Steel	BNVR/L	5.000	.500	.750	.152	.070	.344	TS25
BB-375S	9B375S	●	Steel	BNVR/L	5.000	.500	.750	.1625	.070	.375	TS25
BB-440S	9B440S	●	Steel	BNVR/L	5.000	.500	1.000	.190	.070	.440	TS25
BB-312HM	9B312HM	●	Heavy Metal	BNVR/L	5.000	.500	1.000	.156	.070	.312	TS25
BB-344HM	9B344HM	●	Heavy Metal	BNVR/L	5.000	.500	1.000	.152	.070	.344	TS25
BB-375HM	9B375HM	●	Heavy Metal	BNVR/L	5.000	.500	1.250	.1625	.070	.375	TS25
BB-440HM	9B440HM	●	Heavy Metal	BNVR/L	5.000	.500	1.500	.190	.070	.440	TS25
BB-312C	9B312C	●	Carbide	BNVR/L	5.000	.500	1.250	.156	.070	.312	TS25
BB-440C	9B440C	●	Carbide	BNVR/L	5.000	.500	1.500	.190	.070	.440	TS25

*TS25 screw uses K2 wrench



BANTAM


MINIMUM BORE .400 THREADING - NPT BFR4

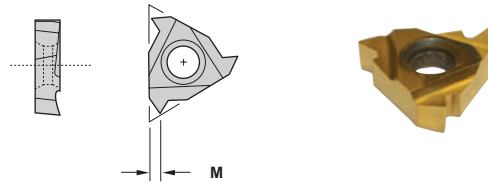

Description	EDP Code	TPI	M	Coating				
				C22	GP22	GP4	AC22	AC4
BFR4-18NPT	9BFR4V18	18	.033		●			
BFR4-27NPT	9BFR4V27	27	.026		●			


BANTAM

THREADING - UN BFR4

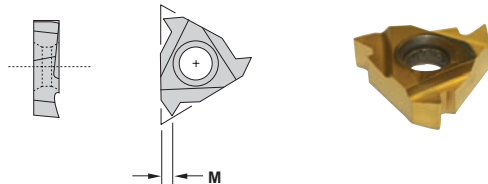

Description	EDP Code	TPI	M	Coating				
				C22	GP22	GP4	AC22	AC4
BFR4-12UN	9BFR4U12	12	.043		●			
BFR4-14UN	9BFR4U14	14	.039		●			
BFR4-16UN	9BFR4U16	16	.034		●			
BFR4-20UN	9BFR4U20	20	.026		●			
BFR4-24UN	9BFR4U24	24	.026		●			
BFR4-28UN	9BFR4U28	28	.021		●			
BFR4-32UN	9BFR4U32	32	.019		●			

THREADING - 55°/60° V BFR4

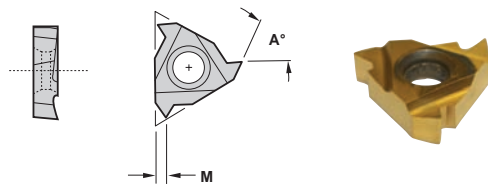


Description	EDP Code	TPI	M	A	Coating				
					C22	GP22	GP4	AC22	AC4
BFR4-55V	9BFR4V55	14-48	.043	55°		●	●		
BFR4-60V	9BFR4V60	14-48	.043	60°		●	●		

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

	Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
●	●	▲	▲	▲

BFR4

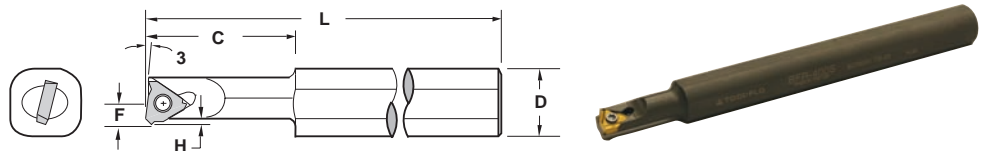

Description	EDP Code	Stk	Material	Insert	Coolant Port	L	D	C	H	F**	Min. Bore	Screw*
BFR-400SC	9BF400SC	●	Steel	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HM	9BF400HM	●	Heavy Metal	BFR4		5.000	.500	1.000	.050	.237	.400	TS25
BFR-400HMC	9BF400HMC	●	Heavy Metal	BFR4	✓	5.000	.500	1.000	.050	.237	.400	TS25

*TS25 screw uses K2 wrench
** Dimension over sharp point



MINIMUM BORE .450

THREADING - ACME

BHR4




	Uncoated	TIN Coated	AlTiN Coated
C22	GP22	GP4	AC22
		●	●
		●	●
		●	●

Description	EDP Code	TPI	W
BHR4-8ACME	9BHA080R	8	.0411
BHR4-10ACME	9BHA100R	10	.0319
BHR4-12ACME	9BHA120R	12	.0283
BHR4-16ACME	9BHA160R	16	.0206

THREADING - STUB ACME

BHR4




	C22	GP22	GP4	AC22	AC4
			●		
			●		
			●		

Description	EDP Code	TPI	W
BHR4-8STACME	9BHA081R	8	.0476
BHR4-10STACME	9BHA101R	10	.0370
BHR4-12STACME	9BHA121R	12	.0326
BHR4-16STACME	9BHA161R	16	.0238

THREADING - 60° V

BHR4



	C22	GP22	GP4	AC22	AC4
Cast Iron		●	▲		
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			


Description	EDP Code	TPI	D
BHR4-60V	9BH460R	16-48	.075

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron		●	▲		
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			

BHR4

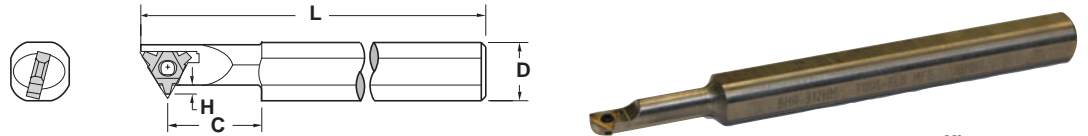


Description	EDP Code	Stk	Material	Insert	L	D	C	H	Min. Bore	Screw
BHR-450S	9BHR450S	●	Steel	BHR4	5.000	.500	1.000	.075	.450	TS25
BHR-450HM	9BHR450HM	●	Heavy Metal	BHR4	5.000	.500	1.000	.075	.450	TS25

MINIMUM BORE .500

THREADING - 60° V

BTVR/L

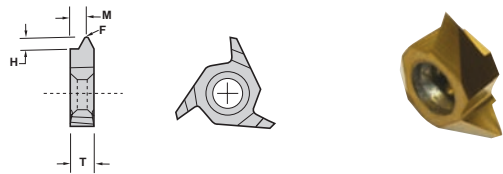

	Uncoated	TIN Coated	AlTiN Coated
C22	GP22	GP4	AC22
		●	●
		●	●


Description	EDP Code	TPI	M	H	T	F
BTVR-60	9BTV60R	8-40	.047	.075	.130	.004
BTVL-60	9BTV60L	8-40	.047	.075	.130	.004

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron		●	▲		
Non-Ferrous	●	▲			
Stainless/High Temp	●	▲			
Steel	●	▲			

BTR/L

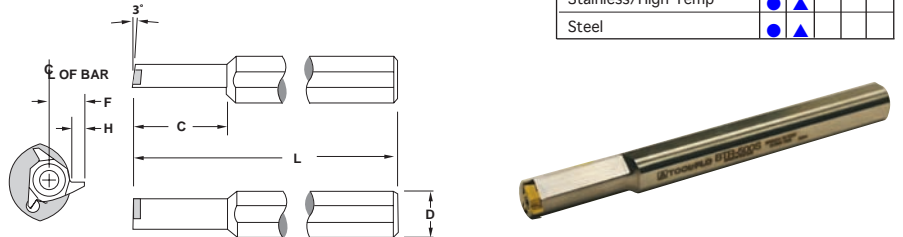


Description	EDP Code	Stk	Material	Insert	L	D	C	H	F	Min. Bore	Screw*
BTR-500S	9BTR500S	●	Steel	BTVR	5.000	.500	1.250	.075	.225	.500	TS25
BTL-500S	9BTL500S	●	Steel	BTVL	5.000	.500	1.250	.075	.225	.500	TS25
BTR-500HM	9BTR500HM	●	Heavy Metal	BTVR	5.000	.500	1.500	.075	.225	.500	TS25
BTL-500HM	9BTL500HM	●	Heavy Metal	BTVL	5.000	.500	1.500	.075	.225	.500	TS25

*TS25 screw uses K2 wrench



MINIMUM BORE .516


CIRCULAR INTERPOLATING MILLGROOVING BNGR



Description	EDP Code	W	D	T						
					C22	GP22	GP4	AC22	AC4	
BNGR-031W	9BG031R	.031	.050	.137		●	●			
BNGR-047W	9BG047R	.047	.070	.137		●	●			
BNGR-062W	9BG062R	.062	.070	.137		●	●			
BNGR-094W	9BG094R	.094	.070	.137		●	●			
BNGR-125W	9BG125R	.125	.070	.137		●	●			

Uncoated		TIN Coated		AlTiN Coated	
C22	GP22	GP4	AC22	AC4	
	●	●			
	●	●			
	●	●			
	●	●			
	●	●			

THREADMILLING BNVR





Description	EDP Code	TPI	F	E	T					
						GFI	GP22	GP4	AC22	AC4
BNVR-60	9BNV60R	18-40	.003F	.095	.137	●	●	●		●
BNVL-60	9BNV60L	18-40	.003F	.095	.137	●	●	●		●

Cast Iron		Non-Ferrous		Stainless/High Temp		Steel	
GFI	GP22	GP4	AC22	AC4			
			●				
		●					
		●					
		●					

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

CIRCULAR INTERPOLATING THREADMILLING & MILLGROOVING BBC

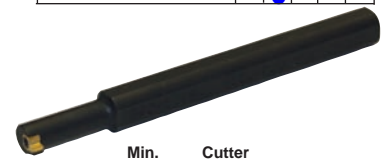

Description	EDP Code	Stk	Material	Insert	L	D	C	Min. Dia.	Cutter Dia.	Screw*
BBC-516S	9BC516S	●	Steel	BN_R/L	5.000	.500	1.250	.800	.516	TS25
BBC-516HM	9BC516HM	●	Heavy Metal	BN_R/L	5.000	.500	1.500	.800	.516	TS25

*TS25 screw uses K2 wrench

Bantam Series Kits

THREADING KITS V-THREADING KIT #1

Kit Contents

1	BFR-312S
10	BFR3-60V GP22
1	T8 WRENCH
1	TS25 SCREW

18NPT-THREADING KIT #2

Kit Contents

1	BFR-312S
10	BFR3-18NPT GP22
1	T8 WRENCH
1	TS25 SCREW

27NPT-THREADING KIT #3

Kit Contents

1	BFR-312S
10	BFR3-27NPT GP22
1	T8 WRENCH
1	TS25 SCREW

GROOVING KITS W.031 GROOVING KIT #4

Kit Contents

1	BB-312S
10	BNGR-031W GP4
1	T8 WRENCH
1	TS25 SCREW

W.047 GROOVING KIT #5

Kit Contents

1	BB-312S
10	BNGR-047W GP4
1	T8 WRENCH
1	TS25 SCREW

W.062 GROOVING KIT #6

Kit Contents

1	BB-312S
10	BNGR-062W GP4
1	T8 WRENCH
1	TS25 SCREW

BORING KITS .180 MIN BORE KIT #7

Kit Contents

1	CSBI-165/187-1/2-7R
10	CDCG-505L GP22
1	T6 WRENCH
1	TS1 SCREW

.285 MIN BORE KIT #8

Kit Contents

1	CSBI-250-3-5R
10	CDCG-505L GP22
1	T6 WRENCH
1	TS1 SCREW





Technical Information

Tool-Flo grade		SURFACE FOOTAGE PER MINUTE (SFPM)					
		uncoated		TiN coated		AlTiN coated	
		GFI	C22	GP4	GP22	AC4	AC22
WORKPIECE MATERIAL	Alloy Steel 4000 Series	60-120			100-250	100-180	200-500
	Aluminum		80-200		200-400		300-600
	Carbon Steel		80-150		80-200	100-210	200-500
	Ductile Iron	60-120			100-250		200-500
	Non Metals	60-120	80-150	60-150	200-400		300-600
	Stainless Steel 300 Series	60-120	80-150	60-150	100-250	80-180	150-350
	Stainless Steel 400 Series	60-120		60-150	100-300	80-180	200-500

Application		FEED RATE		
		THREADING	GROOVING	BORING
WORKPIECE MATERIAL	Alloy Steel 4000 Series	Set by pitch (DOC per pass= .002-.004)	IPR=.002-.004	.002-.004
	Aluminum Non-Metals	Set by pitch (DOC per pass= .004-.006)	IPR=.004-.006	.004-.006
	Carbon Steel	Set by pitch (DOC per pass= .002-.004)	IPR=.002-.004	.002-.004
	300Stainless Steel High Temp Alloys	Set by pitch (DOC per pass= .002-.004)	IPR=.002-.004	.002-.004
	Stainless Steel 400 Series	Set by pitch (DOC per pass= .002-.004)	IPR=.002-.004	.002-.004

CUTTING DATA

TOOL-FLO MFG, on all threading and grooving bars, sets the cutting edge of inserts above centerline. This decreases the deflection reducing the load on the insert. The result is a better finish with less chatter. We recommend following the same procedure for boring operations.

*When using the BB-312S/HM bar with a grooving insert .062 wide or greater, reduce the recommended IPR by 50%.

GRADE CROSSOVER CHART

TOOL-FLO	CIRCLE	EVEREDE
C22	C2,C3,C25	CS2,CM2
GFI	C50	CS-4, CS-6, CS-7
GP22	CG5/CM-10	CVM-2, CV-7
GP4	C-4	CT-7
AC22	CG6	CA2
AC4	C70	CC-7




EXTERNAL HOLDER (METRIC)

THREADING, GROOVING

FLASR/L

Design for Swiss machines

SEE FLO-LOCK SECTION FOR COMPLETE INSERT OFFERING

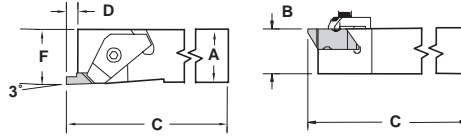

RH SHOWN

RH Holder uses RH Inserts

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	D	F	Clamp Screw	
								Clamp	Screw
FLASR-1010M2	92711008	FL_-2R	10,0	10,0	150,0	3,51	10,0	TF-182	S-310
FLASL-1010M2	92661008	FL_-2L	10,0	10,0	150,0	3,51	10,0	TF-183	S-310
FLASR-1212M2	92711208	FL_-2R	12,0	12,0	150,0	3,51	12,0	TF-182	S-310
FLASL-1212M2	92661208	FL_-2L	12,0	12,0	150,0	3,51	12,0	TF-183	S-310
FLASR-1616M2	92711608	FL_-2R	16,0	16,0	125,0	3,51	16,0	TF-184	S-412
FLASR-1616M3	92711616	FL_-3R	16,0	16,0	125,0	5,31	16,0	TF-184	S-412
FLASL-1616M3	92661616	FL_-3L	16,0	16,0	125,0	5,31	16,0	TF-185	S-412



EXTERNAL HOLDER (INCH)

THREADING, GROOVING

FLASR/L

Design for Swiss machines

SEE FLO-LOCK SECTION FOR COMPLETE INSERT OFFERING

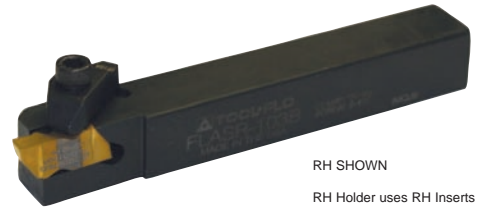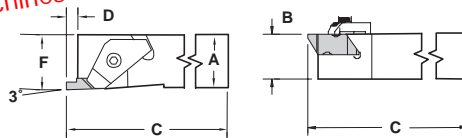

RH SHOWN

RH Holder uses RH Inserts

Most holders available with coolant port
(ie: Add CP to end of description)


Description	EDP Code	Insert	A	B	C	F	D	Clamp Screw	
								Clamp	Screw
FLASR-062D	92900608D	FL_-2R	3/8	3/8	6	.375	.138	TF-182	S-310
FLASL-062D	92650608D	FL_-2L	3/8	3/8	6	.375	.138	TF-183	S-310
FLASR-082D	92900808D	FL_-2R	1/2	1/2	6	.500	.138	TF-182	S-310
FLASL-082D	92650808D	FL_-2L	1/2	1/2	6	.500	.138	TF-183	S-310
FLASR-102B	92901008B	FL_-2R	5/8	5/8	4-1/2	.625	.138	TF-184	S-412
FLASR-083D	92650816D	FL_-3R	1/2	1/2	6	.500	.210	TF-184	S-412
FLASR-103B	92901016B	FL_-3R	5/8	5/8	4-1/2	.625	.210	TF-184	S-412
FLASL-103B	92651016B	FL_-3L	5/8	5/8	4-1/2	.625	.210	TF-185	S-412

EXTERNAL HOLDER (INCH)

PROFILING

FLKL-F

SEE PROFILING SECTION FOR COMPLETE INSERT OFFERING



RH SHOWN

RH Holder uses RH Inserts

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	E	F	PARTS			
								Seat	Seat Screw	Clamp	Clamp Screw
FLKLCRF-0805D	93150829D	FLPR-5_	1/2	1/2	6	.750	.500	SM-285	S-959	CM180	S-524
FLKLCLF-0805D	93140829D	FLPL-5_	1/2	1/2	6	.750	.500	SM-286	S-959	CM181	S-524
FLKLCRF-1005B	93151029B	FLPR-5_	5/8	5/8	4-1/2	.750	.625	SM-285	S-959	CM180	S-524
FLKLCLF-1005B	93141029B	FLPL-5_	5/8	5/8	4-1/2	.750	.625	SM-286	S-959	CM181	S-524



EXTERNAL HOLDER (METRIC)

THREADING, GROOVING


AL

Design for Swiss machines



RH SHOWN
RH Holder uses RH Inserts

SEE LAYDOWN SECTION FOR COMPLETE INSERT OFFERING



Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	F	Insert Screw	Seat Screw	Wrench	Seat
AL0808M2R	916108321	11ER	8,0	8,0	100,0	11,0	SN2	---	K2	---
AL1010M2R	916110321	11ER	10,0	10,0	100,0	10,0	SN2	---	K2	---
AL1616M3R	916116361	16ER	16,0	16,0	100,0	16,0	SA3	SY3	K3	YE3
AL1616M3L	916116362	16EL	16,0	16,0	100,0	16,0	SA3	SY3	K3	YI3
AL2020M3R	916120361	16ER	20,0	20,0	128,6	20,0	SA3	SY3	K3	YE3
AL2020M3L	916120362	16EL	20,0	20,0	128,6	20,0	SA3	SY3	K3	YI3
AL2525M3R	916125361	16ER	25,0	25,0	153,6	25,0	SA3	SY3	K3	YE3
AL2525M3L	916125362	16EL	25,0	25,0	153,6	25,0	SA3	SY3	K3	YI3

EXTERNAL HOLDER (INCH)

THREADING, GROOVING


AL

Design for Swiss machines



RH SHOWN
RH Holder uses RH Inserts

SEE LAYDOWN SECTION FOR COMPLETE INSERT OFFERING



Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	E	F	Insert Screw	Seat Screw	Wrench	Seat
AL0500-3R	916050361	16ER	1/2	1/2	5	1.15	.63	SA3	SY3	K3	YE3
AL0500-3L	916050362	16EL	1/2	1/2	5	1.15	.63	SA3	SY3	K3	YI3
AL0625-3R	916052361	16ER	5/8	5/8	5	1.15	.63	SA3	SY3	K3	YE3
AL075-3R	916056361	16ER	3/4	3/4	5	1.2	.75	SA3	SY3	K3	YE3
AL075-3L	916056362	16EL	3/4	3/4	5	1.2	.75	SA3	SY3	K3	YI3
AL100-3R	916064361	16ER	1	1	6	1.2	1.0	SA3	SY3	K3	YE3
AL100-3L	916064362	16EL	1	1	6	1.2	1.0	SA3	SY3	K3	YI3
AL100-4R	916064401	22ER	1	1	6	1.42	1.0	SA4	SY4	K4	YE4
AL100-4L	916064402	22EL	1	1	6	1.42	1.0	SA4	SY4	K4	YI4
AL125-4R	916068401	22ER	1-1/4	1-1/4	7	1.42	1.250	SA4	SY4	K4	YE4
AL125-5R	916068441	27ER	1-1/4	1-1/4	7	1.57	1.250	SA5	SY5	K5	YE5
AL125-5L	916068442	27EL	1-1/4	1-1/4	7	1.57	1.250	SA5	SY5	K5	YI5



TOOL FLO




CHASERS

Oil & Gas



Chaser Insert Nomenclature Chart

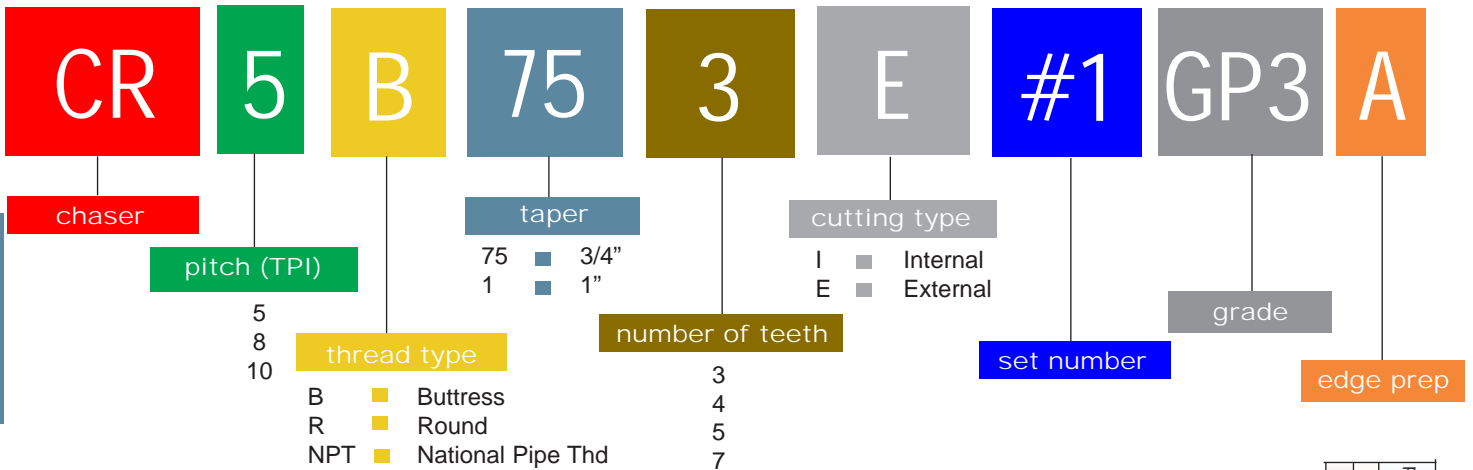

API BUTTRESS External

■ For holders see pg. 68

Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth	G50	GP50	AC3	AC50
CR-5B75-3E #1	M16415188	5	3/4	.670	.573	.205	3	●	●	●	●
CR-5B75-3E #2	M16415189	5	3/4	.670	.582	.205	3	●	●	●	●
CR-5B75-3E #3	M16426149	5	3/4	.670	.590	.205	3	●	●	●	●
CR-5B75-4E	M16422675	5	3/4	.804	.625	.200	4	●	●	●	●
CR-5B1-4E	M1741130	5	1	.800	.640	.200	4	●	●	●	●
CR-8B75-4E	M2145353	8	3/4	.800	.605	.200	4	●	●	●	●

Internal

■ For bars see pg. 69

Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth	G50	GP50	AC3	AC50
CR-5B75-3I	M1681847	5	3/4	.630	.577	.204	3	●	●	●	●
CR-5B75-4I	M1681347	5	3/4	.800	.582	.205	4	●	●	●	●
CR-5B75-5I	M16815688	5	3/4	1.000	.590	.205	5	●	●	●	●
CR-5B1-3I	M1782052	5	1	.635	.635	.200	3	●	●	●	●
CR-5B1-4I	M1782051	5	1	.800	.640	.200	4	●	●	●	●
CR-8B75-4I	M2185353	8	3/4	.800	.590	.205	4	●	●	●	●

API ROUND External

■ For holders see pg. 68

Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth	G50	GP50	AC3	AC50
CR-8R-3E #1	M32416731	8	3/4	.630	.577	.204	3	●	●	●	●
CR-8R-3E #2	M32416732	8	3/4	.630	.586	.204	3	●	●	●	●
CR-8R-3E #3	M32416733	8	3/4	.630	.591	.204	3	●	●	●	●
CR-8R-3E	M32419310	8	3/4	.630	.592	.204	3	●	●	●	●
CR-8R-4E 6°	M3241136	8	3/4	.640	.625	.200	4	●	●	●	●
CR-8R-4E 12°	M3241163	8	3/4	.635	.625	.200	4	●	●	●	●
CR-10R-3E #1	M34416728	10	3/4	.628	.563	.204	3	●	●	●	●
CR-10R-3E #2	M34416729	10	3/4	.628	.572	.204	3	●	●	●	●
CR-10R-3E #3	M34416730	10	3/4	.628	.575	.204	3	●	●	●	●
CR-10R-3E	M3441291	10	3/4	.630	.625	.204	3	●	●	●	●

API ROUND & BUTTRESS External

CNGA - Double Sided (2 cutting edges)

■ For holders see pg. 68


Description	EDP Code	TPI	TPF	No. of Teeth	GP50	AC3	AC50
CNGA-8R-3E	M32427407	8	3/4	3	●	●	●
CNGA-10R-3E	M34427408	10	3/4	3	●	●	●
CNGA-5B75-3E	M16427408	5	3/4	3	●	●	●



CHASERS

API ROUND Internal

■ For bars see pg. 69




Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-8R-3I	M3287464	8	3/4	.630	.592	.204	3	●	●	●	●
CR-8R-4I	M3281136	8	3/4	.635	.625	.204	4	●	●	●	●
CR-8R-4I	M32825150	8	3/4	.640	.625	.204	4	●	●	●	●
CR-8R-7I	M32814828	8	3/4	1.000	.625	.204	7	●	●	●	●
CR-8R-7I	M32817968	8	3/4	1.000	.625	.204	7	●	●	●	●
CR-10R-3I	M3481291	10	3/4	.630	.625	.204	3	●	●	●	●

CVD Coated	TiN Coated	AlTiN Coated
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●
●	●	●

LPT/NPT External

■ For holders see pg. 68




Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-8NPT-4E	M3648996	8	3/4	.630	.620	.204	4	●	●	●	●
CR-11.5NPT-4E	M3649668	11.5	3/4	.625	.620	.1875	4	●	●	●	●

G50	GP50	AC3	AC50
●	●	●	●
●	●	●	●

Internal

■ For bars see pg. 69



Description	EDP Code	TPI	TPF	L	A	T	No. of Teeth				
								G50	GP50	AC3	AC50
CR-8NPT-4I	M3689804	8	3/4	.625	.620	.204	4	●	●	●	●
CR-11.5NPT-4I	M36823951	11.5	3/4	.625	.620	.1875	4	●	●	●	●
CR-8NPT-7I	M36817755	8	3/4	.625	.620	.1875	7	●	●	●	●



G50	GP50	AC3	AC50
●	●	●	●
●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

J-Series	▲	▲	●	●
K-Series	▲	▲	●	●
L-Series	▲	▲	●	●
N-Series	▲	▲	●	●
P-Series	▲	▲	●	●
Q-Series	▲	▲	●	●


CHIPBREAKERS External



Description	EDP Code	L	A	T	Coolant Grooves		Inserts
					✓	✗	
CR-5B75/5B1-4E-CB	TF2993	.800	.500	.125	✓	✗	CR-5B75-4E/CR-5B1-4E
CR-8R/10R-3E/4E-CB	TF1353E	.625	.460	.120	✓	✗	CR-8R-3E/CR-8R-4E/CR-10R-3E/CR-8NPT-4E
#3 CB without COOLANT GROOVES .170	TF26424	.618	.460	.170	✓	✗	CR-8R-3E/CR-8R-4E/CR-10R-3E/CR-8NPT-4E

External with coolant grooves

Also available at -.010, -.020 and -.030 off the A dimension.



Description	EDP Code	L	A	T	Coolant Grooves		Inserts
					✓	✗	
TD4601 5B75-1-CB	TF16660	.665	.530	.170	✓	✗	CR-5B75-3E #1
TD4602 5B75-2-CB	TF16661	.668	.543	.170	✓	✗	CR-5B75-3E #2
TD4603 5B75-3-CB	TF16662	.665	.553	.170	✓	✗	CR-5B75-3E #3
TD3931 8R-1-CB	TF16657	.628	.518	.175	✓	✗	CR-8R-3E #1
TD3932 8R-2-CB	TF16658	.635	.526	.175	✓	✗	CR-8R-3E #2
TD3933 8R-3-CB	TF27129	.630	.540	.175	✓	✗	CR-8R-3E #3
TA2237 10R-1-CB	TF16760	.628	.503	.175	✓	✗	CR-10R-3E #1
TA2238 10R-2-CB	TF16761	.628	.512	.175	✓	✗	CR-10R-3E #2
TA2239 10R-3-CB	TF16762	.628	.515	.175	✓	✗	CR-10R-3E #3
#3 CB W/COOLANT GROOVES .170	TF26423	.618	.460	.170	✓	✗	CR-8R-3E




CHIPBREAKER

External


with coolant grooves and cavity

Also available at *-.010, -.020 and -.030* off the A dimension.



Description	EDP Code	L	A	T	Coolant Grooves	Inserts
TD4601 5B75-1-CB W/CAVITY	TF30297	.665	.550	.170	✓	CR-5B75-3E #1
TD4602 5B75-2-CB W/CAVITY	TF30298	.668	.550	.170	✓	CR-5B75-3E #2
TD4603 5B75-3-CB W/CAVITY	TF30299	.665	.560	.170	✓	CR-5B75-3E #3
TD3931 8R-1-CB W/CAVITY	TF28130	.628	.518	.165	✓	CR-8R-3E #1
TD3932 8R-2-CB W/CAVITY	TF28131	.635	.526	.165	✓	CR-8R-3E #2
TD3933 8R-3-CB W/CAVITY	TF28132	.628	.520	.165	✓	CR-8R-3E #3


Internal



Description	EDP Code	L	A	T	Coolant Grooves	Inserts
CR-5B75/5B1-4I-CB	TF16104	.800	.500	.125		CR-5B75-4I/CR-5B1-4I
CR-8R/10R-3I/4I-CB	TF1353I	.630	.488	.125		CR-8R-3I/CR-8R-4I/CR-10R-3I/CR-8LPT-4I
CR-5B75-5I-CB	TF28765	1.000	.540	.125	✓	CR-5B75-5I
CR-8R-7I-CB	TF3435	1.000	.520	.125		CR-8R-7I
CR-8R-7I-CB	TF18096	1.010	.540	.125	✓	CR-8R-7I

EXTERNAL HOLDER

Threading
CLVOR

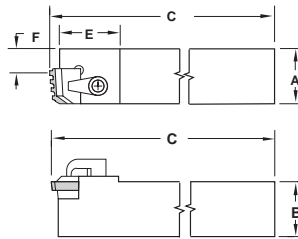

RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker
CLVOR-166	92601694	3 TOOTH*	1	1	8	1.25	.475	TF1207	SF80	TC311	STC-4	TF1353
CLVOR-206	92602060	3 TOOTH*	1-1/4	1-1/4	7	1.25	.725	TF1207	SF80	TC311	STC-4	TF1353
CLVOR-168	92601696	4 TOOTH**	1	1	6	1.25	.800	TF8132E	SF80	TC311	STC-4	TF2993
CLVOR-208	92602096	4 TOOTH**	1-1/4	1-1/4	7	1.25	.800	TF8132E	SF60	TC311	STC-4	TF2993
CLVOR-248	92602496	4 TOOTH**	1-1/2	1-1/2	7	1.25	.800	TF8132E	SF60	TC311	STC-4	TF2993

*Accepts 3 & 4 Tooth RD, NPT, and 3 Tooth Buttress **Accepts 4 Tooth Buttress Only


METRIC

Description	EDP Code	Insert	A	B	C	E	F	Seat	Seat Screw	Clamp	Clamp Screw	Chip Breaker
CLVOR-25M6	9260M2560	3 TOOTH*	25	25	177,8	32	16,1	TF1207-S	SF80	TC311	STC-4	TF1353
CLVOR-32M6	9260M3260	3 TOOTH*	32	32	177,8	32	16,1	TF1207-S	SF85	TC311	STC-4	TF1353
CLVOR-40M6	9260M4094	4 TOOTH**	40	40	179,1	32	29,8	TF8132E	SF80	TC311	STC-4	TF2993
CLVOR-40M8	9260M4096	4 TOOTH**	40	40	179,1	32	29,8	TF8132E	SF60	TC311	STC-4	TF2993

*Accepts 3 & 4 Tooth RD, NPT, and 3 Tooth Buttress **Accepts 4 Tooth Buttress Only

PCFNR

For double sided CNGA chaser style

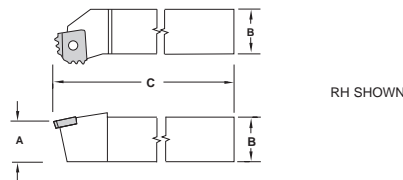

RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)


Description	EDP Code	Insert	A	B	C	Lock Pin	Clamp	Clamp Screw
PCFNR-165	96301664	CNGA 8R/10R/5B75-3E	1	1	6	NL-44	TC311	STC-11
PCFNR-205	96302064	CNGA 8R/10R/5B75-3E	1-1/4	1-1/4	6	NL-44	TC311	STC-11



CHASERS

INTERNAL BAR

Threading
SI-CLHOR

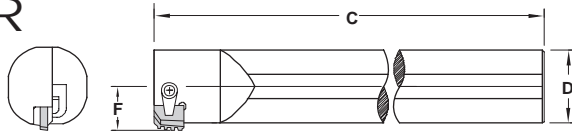

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	D	F	C	Min. Bore	Seat	Seat Screw	Clamp	Clamp Screw
SI-CLHOR-206	97002094	CR-8R-3I	1-1/4	.750	14	1.500	-	-	TC311	STC-8
		CR-8R-4I	1-1/4	.750	14	1.500	-	-	TC311	STC-8
		CR-5B75-3I	1-1/4	.750	14	1.500	-	-	TC311	STC-8
SI-CLHOR-326	97003294	CR-8R-3IDC	2	1.125	14	2.250	TF1780I	SF60	TC311	STC-8
SI-CLHOR-328	97003296	CR-5B1-4I	2	1.125	14	2.250	TF8132I	SF60	TC311	STC-8
		CR-5B75-4I	2	1.125	14	2.250	TF8132I	SF60	TC311	STC-8
		CR-8B75-4I	2	1.125	14	2.250	TF8132I	SF60	TC311	STC-8
SI-CLHOR-408	97004096	CR-5B1-4I	2-1/2	1.375	14	2.750	TF8132I	SF60	TC311	STC-8
		CR-5B75-4I	2-1/2	1.375	14	2.750	TF8132I	SF60	TC311	STC-8
		CR-8B75-4I	2-1/2	1.375	14	2.750	TF8132I	SF60	TC311	STC-8
SI-CLHOR-329	97003298	CR-8R-7I	2	1.125	16	2.250	TF3218	SF48	TC311	STC-4
SI-CLHOR-409	97004098	CR-5B75-5I	2-1/2	1.375	16	2.750	TF3218	SF48	TC311	STC-4

Threading - METRIC SI-CLHOR

Description	EDP Code	Insert	D	F	C	Min. Bore	Seat	Seat Screw	Clamp	Clamp Screw
SI-CLHOR-40M6	970M4094	CR-8R-3I	40	23,16	400	50,8	-	-	TC311	STC-8
		CR-8R-4I	40	23,16	400	50,8	-	-	TC311	STC-8
		CR-5B75-3I	40	23,16	400	50,8	-	-	TC311	STC-8


Technical Information

API ROUND THREADING		8 & 10 PITCH
application		surface feet/minute (SFPM)
External		500 - 800
Internal		500 - 700


API BUTTRESS THREADING		5 PITCH
application		surface feet/minute (SFPM)
External		300 - 500
Internal		500 - 700

- Number of passes is dictated by the number of teeth on the insert.
 - 3-4 tooth requires 3-5 passes
 - 7 tooth requires 1-2 passes
 - One or two additional passes may be required for heat treated materials.

internal chaser application

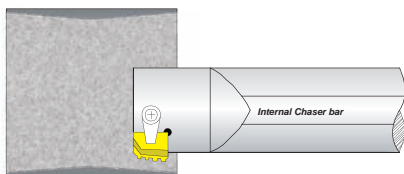

external chaser application





Recommended SFPM for Chasers

EXTERNAL 8 Round Sets	1st Choice AlTiN PVD Coated		2nd Choice AlTiN PVD Coated		General purpose TiN PVD Coated
	ZA3	AC3	AC50	G50	
Material					GP50
H	500	500	500	500	800
J	500	500	500	500	800
K	500	500	500	500	800
L	500	500	500	500	600
N	500	500	500	500	600
P	500	500	500	500	600

ZA3 - All diameters
AC3 - All diameters
AC50 - All diameters
G50 - 4-1/2" - 9-5/8" Casing
GP50 - 2-3/8" - 3-1/2" Tubing

EXTERNAL 8 Round Stand Alone TF19310	1st Choice AlTiN PVD Coated		2nd Choice AlTiN PVD Coated		TiN PVD Coated	TiN CVD Coated
	ZA3	AC3	AC50	G50		
Material						
H	500	500	500	500		
J	500	500	500	500		
K	500	500	500	500		
L	500	500	500	500		
N	500	500	500	500		
P	500	500	500	500		

AC50 - 3-1/2" - 7" diameters
G50 - Only over 7" diameters
 4 PASSES

INTERNAL 8 Round Stand Alone TF19437 4 TOOTH	1st Choice AlTiN PVD Coated		2nd Choice AlTiN PVD Coated	
	ZA3	AC3	AC50	
Material				
H	700	700	700	
J	700	700	700	
K	700	700	700	
L	700	700	700	
N	700	700	700	
P	700	700	700	

ZA3 - All diameters
AC3 - All diameters
AC50 - All diameters
 4-5 PASSES

INTERNAL 8 Round Stand Alone TF17968 7 TOOTH	1st Choice AlTiN PVD Coated		2nd Choice AlTiN PVD Coated	
	ZA3	AC3	AC50	
Material				
H	500	500	700	
J	500	500	700	
K	500	500	700	
L	500	500	700	
N	500	500	700	
P	500	500	700	

AC50 - All diameters
 1-2 PASSES

EXTERNAL Buttress Sets	TiN CVD Coated	
	G50	
Material		
H	500	
J	500	
K	500	
L	500	
N	500	
P	500	

G50 - All diameters

EXTERNAL Buttress Stand Alone TF22675 3/4" TAPER	TiN CVD Coated	
	G50	
Material		
H	800	
J	800	
K	800	
L	600	
N	600	
P	600	

G50 - All diameters
 5 PASSES

EXTERNAL Buttress Stand Alone TF1130 1" TAPER	TiN CVD Coated	
	G50	
Material		
H	800	
J	800	
K	800	
L	600	
N	600	
P	600	


G50 - All diameters
 5 PASSES

INTERNAL Buttress Stand Alone TF22675 3/4" TAPER	TiN CVD Coated	
	G50	
Material		
H	800	
J	800	
K	800	
L	600	
N	600	
P	600	

G50 - All diameters
 5 PASSES



TOOL-FLO





CUT OFF

FC SERIES CUT OFF



INSERT FC

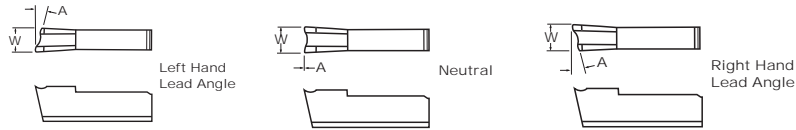


Description	EDP Code	Competitor Nomenclature	Insert Width	A	Hand	Coatings									
						Uncoated	TIN Coated	AlTiN Coated	C36	GP26	GP530	AC26	AC3	AC530	
FC-094-N	FC094N	507-140	3/32 (.094)	0°	N										
FC-094-L-4	FC094L4	507-144	3/32 (.094)	4°	L	●	●	●	●	●	●	●	●	●	●
FC-094-L-12	FC094L12	507-152	3/32 (.094)	12°	L	●	●	●	●	●	●	●	●	●	●
FC-094-R-4	FC094R4	507-143	3/32 (.094)	4°	R	●	●	●	●	●	●	●	●	●	●
FC-094-R-12	FC094R12	507-151	3/32 (.094)	12°	R	●	●	●	●	●	●	●	●	●	●
FC-094-R-18	FC094R18	507-161	3/32 (.094)	18°	R	●	●	●	●	●	●	●	●	●	●
FC-125-N	FC125N	507-117	1/8 (.125)	0°	N	●	●	●	●	●	●	●	●	●	●
FC-125-L-4	FC125L4	507-129	1/8 (.125)	4°	L	●	●	●	●	●	●	●	●	●	●
FC-125-L-12	FC125L12	507-154	1/8 (.125)	12°	L	●	●	●	●	●	●	●	●	●	●
FC-125-R-4	FC125R4	507-128	1/8 (.125)	4°	R	●	●	●	●	●	●	●	●	●	●
FC-125-R-12	FC125R12	507-146	1/8 (.125)	12°	R	●	●	●	●	●	●	●	●	●	●
FC-125-R-18	FC125R18	507-155	1/8 (.125)	18°	R	●	●	●	●	●	●	●	●	●	●
FC-187-N	FC187N	507-116	3/16 (.187)	0°	N	●	●	●	●	●	●	●	●	●	●
FC-187-L-4	FC187L4	507-125/507-127	3/16 (.187)	4°	L	●	●	●	●	●	●	●	●	●	●
FC-187-R-4	FC187R4	507-124/507-126	3/16 (.187)	4°	R	●	●	●	●	●	●	●	●	●	●
FC-187-R-12	FC187R12	507-176	3/16 (.187)	12°	R	●	●	●	●	●	●	●	●	●	●

■ Toolholders listed below

Description	EDP Code	Competitor Nomenclature	Insert Width	A	Hand	COMPETITOR'S GRADES					
						M40	M50	M43			
In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.						●	●	●	●	●	●
● High performance choice in optimal conditions. ▲ Recommended grade under general conditions.											
Steel (Low to moderate speeds)							●				
Steel (Moderate to high speeds)								●			
Stainless (Low to moderate speeds)								●			
Stainless (Moderate to high speeds)									●		

HOLDERS FCIVOR 1/2"

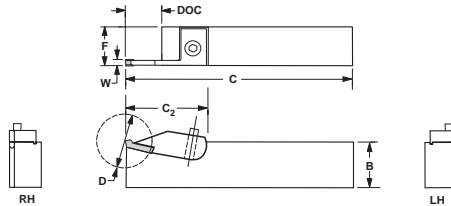


Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Competitor Part No.	Max Dia. D	B	C	C ₂	F	Clamp Screw	CLAMP Description	D.O.C.	EDP Code	Competitor Part No.
FCIVOR-0500-094	9FCIR050094	206-175	1.063	.500	6.00	1.00	.500	SS65	CHR-FCI094	.531	9HCHRFCI094	435-152
FCIVOR-0500-125	9FCIR0500125	206-145	1.063	.500	6.00	1.00	.500	SS65	CHR-FCI125	.531	9HCHRFCI125	435-130

HOLDERS FCVOR/L 1/2" & 3/4"

■ RH holders use RH components

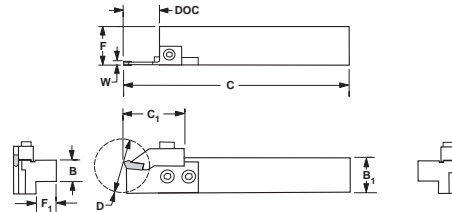

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Competitor Nomenclature	D-Max	B	B ₁	C	C ₁	F	F ₁	Anvil Screw	Clamp Screw
FCVOR-080B	9FCR0800	206-179	1.625	.500	.750	4.50	1.38	1.00	.460	SS84M	SS91
FCVOL-080B	9FCL0800	206-180	1.625	.500	.750	4.50	1.38	1.00	.460	SS84M	SS91
FCVOR/L-1200B	9FCR/L1200	206-178	1.625	.750	.750	4.50	1.38	1.00	.460	SS84M	SS91

COMPONENT PARTS AVR-FCS Anvils



Description	EDP Code	Competitor Part No.	Width	D.O.C.
AVR-FCS094	911FC094	333-101	3/32	.812
AVR-FCS125	911FC125	333-102	1/8	.812
AVL-FCS094	910FC094	333-103	3/32	.812
AVL-FCS125	910FC125	333-104	1/8	.812

COMPONENT PARTS CHR-FCS Clamps



Description	EDP Code	Competitor Part No.	Width	D.O.C.
CHR-FCS094	9H1FCR094	435-154	3/32	.812
CHR-FCS125	9H1FCR125	435-155	1/8	.812
CHL-FCS094	9H1FCL094	435-156	3/32	.812
CHL-FCS125	9H1FCL125	435-157	1/8	.812



FC SERIES CUT OFF


HOLDERS

FCVOR/L

1" & 1-1/4"

■ RH holders use RH components

Most holders available with coolant port
(ie: Add CP to end of description)

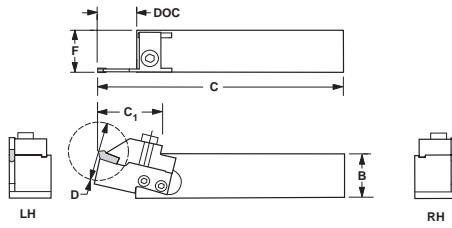

Description	EDP Code	Competitor Nomenclature	D-Max	B	C	C ₁	F	Anvil Screw	Clamp Screw
FCVOR-1600D	9FCR1600D	206-141	1.625	1.000	6.00	1.50	1.25	SS82M	SS83
FCVOL-1600D	9FCL1600D	206-142	1.625	1.000	6.00	1.50	1.25	SS82M	SS83
FCVOR-2000D	9FCR2000D	206-143	1.625	1.250	6.00	1.50	1.50	SS82M	SS83
FCVOL-2000D	9FCL2000D	206-144	1.625	1.250	6.00	1.50	1.50	SS82M	SS83

COMPONENT PARTS

AVR-FCL Anvils



Description	EDP Code	Competitor Part No.	Width	D.O.C.
AVR-FCL094	901FC094	331-117	3/32	.500
AVR-FCL125	901FC125	331-101	1/8	.800
AVR-FCL187	901FC187	331-103	3/16	.800
AVL-FCL094	900FC094	331-118	3/32	.500
AVL-FCL125	900FC125	331-102	1/8	.800
AVL-FCL187	900FC187	331-104	3/16	.800

COMPONENT PARTS

CHR-FCL Clamps



Description	EDP Code	Competitor Part No.	Width	D.O.C.
CHR-FCL094	9H0FCR094	435-142	3/32	.500
CHR-FCL125/187	9H0FCR125/187	435-128	1/8 & 3/16	.800
CHL-FCL094	9H0FCL094	435-143	3/32	.500
CHL-FCL125/187	9H0FCL125/187	435-129	1/8 & 3/16	.800


HOLDERS

CDVOR/L

1", 1-1/4", 1-1/2"

■ RH holders use RH components

Most holders available with coolant port
(ie: Add CP to end of description)

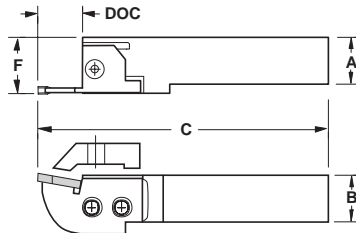

Description	EDP Code	Insert Width	A	B	C	F	Clamp Screw	Anvil Screw
CDVOR-16	92401600	1.063	1.00	1.00	*	1.236	SB90	SF95
CDVOL-16	92301600	1.063	1.00	1.00	*	1.236	SB90	SF95
CDVOR-20	92402000	1.063	1.25	1.25	*	1.744	SB90	SF95
CDVOL-24	92402400	1.063	1.50	1.50	*	1.744	SB90	SF95

*Determined by the anvil

COMPONENT PARTS

AHR-FC Anvils



Description	EDP Code	D.O.C.
AHR-FC094	9150FC094	.500
AHR-FC125	9150FC125	1.000
AHR-FC187	9150FC187	1.000
AHL-FC094	9151FC094	.500
AHL-FC125	9151FC125	1.000
AHL-FC187	9151FC187	1.000

COMPONENT PARTS

CHR-FC Clamps




Description	EDP Code	D.O.C.
CHR-FC094	9HCHRFC094	.500
CHR-FC125	9HCHRFC125	1.000
CHR-FC187	9HCHRFC187	1.000
CHL-FC094	9HCHLFC094	.500
CHL-FC125	9HCHLFC125	1.000
CHL-FC187	9HCHLFC187	1.000

HOLDERS

FCEDVOR

1", 1-1/4"

■ RH holders use RH components listed on following page.

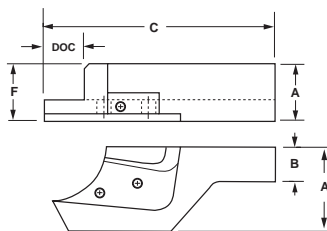


Description	EDP Code	Competitor Nomenclature	DOC	A	A ₁	B	F	C	Anvil Screw	Clamp Screw
FCEDVOR-1600D	9FCEDR1600D	206-116	1.500	1.769	2.224	1.000	1.76	6.000	S-352	S-628
FCEDVOL-1600D	9FCEDL1600D	206-119	1.500	1.769	2.224	1.000	1.76	6.000	S-352	S-628
FCEDVOR-2000D	9FCEDR2000D	206-121	1.500	1.899	2.224	1.250	1.89	6.000	S-352	S-628
FCEDVOL-2000D	9FCEDL2000D	206-124	1.500	1.899	2.224	1.250	1.89	6.000	S-352	S-628

FC SERIES CUT OFF



COMPONENT PARTS


AVR/L-FCED Anvils



Description	EDP Code	D.O.C.
AVR/L-FCED125	902FCED125	1.500
AVR/L-FCED187	902FCED187	1.500

COMPONENT PARTS

CHR/L-FCED Clamps




Description	EDP Code	D.O.C.
CHR-FCED125	9H2FCEDR187	1.500
CHL-FCED125	9H2FCEDL094	1.500
CHR-FCED187	9H2FCEDR125	1.500
CHL-FCED187	9H2FCEDL187	1.500

FC SERIES

NEUTRAL


TFN



Description	EDP Code	Insert Width	A	R					
					C22	GP22	GP50	AC22	AC50
TFN-2	COTN200	2,0 (.078)	0°	0,2 (.008)					
TFN-2.4	COTN240	2,4 (.094)	0°	0,2 (.008)					●
TFN-3	COTN300	3,0 (.118)	0°	0,2 (.008)					●
TFN-4	COTN400	4,0 (.157)	0°	0,2 (.008)					●
TFN-4.8	COTN480	4,8 (.187)	0°	0,3 (.012)					●

LEFT HAND



TFL



Description	EDP Code	Insert Width	A	R					
					C22	GP22	GP50	AC22	AC50
TFL-2-4	COTL240	2,0 (.078)	4°	0,2 (.008)					●
TFL-2-8	COTL280	2,0 (.078)	8°	0,2 (.008)					●
TFL-2-15	COTL215	2,0 (.078)	15°	0,2 (.008)					●
TFL-2.4-4	COTL244	2,4 (.094)	4°	0,2 (.008)					●
TFL-2.4-8	COTL248	2,4 (.094)	8°	0,2 (.008)					●
TFL-2.4-15	COTL2415	2,4 (.078)	15°	0,2 (.008)					●
TFL-3-4	COTL340	3,0 (.118)	4°	0,2 (.008)					●
TFL-3-8	COTL380	3,0 (.118)	8°	0,2 (.008)					●
TFL-3-15	COTL315	3,0 (.118)	15°	0,2 (.008)					●
TFL-4-4	COTL440	4,0 (.157)	4°	0,2 (.008)					●
TFL-4-8	COTL480	4,0 (.157)	8°	0,2 (.008)					●
TFL-4-15	COTL415	4,0 (.157)	15°	0,2 (.008)					●
TFL-4.8-4	COTL484	4,8 (.187)	4°	0,3 (.012)					●
TFL-4.8-8	COTL488	4,8 (.187)	8°	0,3 (.012)					●

RIGHT HAND

TFR



Description	EDP Code	Insert Width	A	R					
					C22	GP22	GP50	AC22	AC50
TFR-2-4	COTR240	2,0 (.078)	4°	0,2 (.008)					●
TFR-2-8	COTR280	2,0 (.078)	8°	0,2 (.008)					●
TFR-2-15	COTR215	2,0 (.078)	15°	0,2 (.008)					●
TFR-2.4-4	COTR244	2,4 (.094)	4°	0,2 (.008)					●
TFR-2.4-8	COTR248	2,4 (.094)	8°	0,2 (.008)					●
TFR-2.4-15	COTR2415	2,4 (.078)	15°	0,2 (.008)					●
TFR-3-4	COTR340	3,0 (.118)	4°	0,2 (.008)					●
TFR-3-8	COTR380	3,0 (.118)	8°	0,2 (.008)					●
TFR-3-15	COTR315	3,0 (.118)	15°	0,2 (.008)					●
TFR-4-4	COTR440	4,0 (.157)	4°	0,2 (.008)					●
TFR-4-8	COTR480	4,0 (.157)	8°	0,2 (.008)					●
TFR-4-15	COTR415	4,0 (.157)	15°	0,2 (.008)					●
TFR-4.8-4	COTR484	4,8 (.187)	4°	0,3 (.012)					●
TFR-4.8-8	COTR488	4,8 (.187)	8°	0,3 (.012)					●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


Cast Iron					
Non-Ferrous					
Stainless/High Temp					
Steel					●



CUT OFF

INTEGRAL SHANK TCOHR/L

■ Inserts: TFN, TFR, TFL

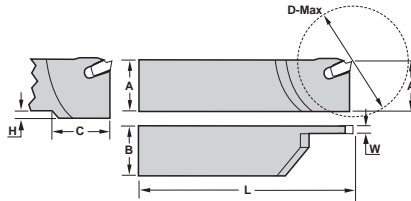


RH SHOWN

Description	EDP Code	Insert Width	D-Max	A	B	L	C	H
TCOHR 9.5-2	9824952	.071-.106	1.130	.375	.375	3.000	.700	.250
TCOHL 9.5-2	9823952	.071-.106	1.130	.375	.375	3.000	.700	.250
TCOHR 12.7-2	98241272	.071-.106	1.250	.500	.500	4.300	.750	.130
TCOHL 12.7-2	98231272	.071-.106	1.250	.500	.500	4.300	.750	.130
TCOHR 12.7-3	98241273	.106-.139	1.250	.500	.500	4.300	.750	.190
TCOHL 12.7-3	98231273	.106-.139	1.250	.500	.500	4.300	.750	.190
TCOHR 16-2	9824162	.071-.106	1.250	.625	.625	4.500	----	----
TCOHL 16-2	9823162	.071-.106	1.250	.625	.625	4.500	----	----
TCOHR 16-3	9824163	.106-.139	1.380	.625	.625	4.500	.750	.120
TCOHL 16-3	9823163	.106-.139	1.380	.625	.625	4.500	.750	.120
TCOHR 16-4	9824164	.138-.178	1.500	.625	.625	4.500	.810	.120
TCOHL 16-4	9823164	.138-.178	1.500	.625	.625	4.500	.810	.120
TCOHR 19-2	9824192	.071-.106	1.380	.750	.750	4.500	----	----
TCOHL 19-2	9823192	.071-.106	1.380	.750	.750	4.500	----	----
TCOHR 19-3	9824193	.106-.139	1.750	.750	.750	4.500	----	----
TCOHL 19-3	9823193	.106-.139	1.750	.750	.750	4.500	----	----
TCOHR 19-4	9824194	.138-.178	2.000	.750	.750	4.500	----	----
TCOHL 19-4	9823194	.138-.178	2.000	.750	.750	4.500	----	----

CUT OFF

INTEGRAL SHANK FOR AUTOMATICS TCOHR/L - (Metric)

■ Inserts: TFN, TFR, TFL


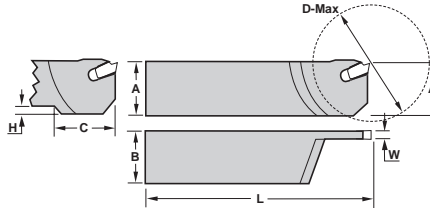


LH SHOWN

Description	EDP Code	Insert Width	D-Max	A	B	L	C	H
TCOHAR 10-2	9826102	1,8-2,7	30,0 (1.180)	10,0	10,0	120,0	17,0	6,1
TCOHAL 10-2	9825102	1,8-2,7	30,0 (1.180)	10,0	10,0	120,0	17,0	6,1
TCOHAR 12-2	9826122	1,8-2,7	30,0 (1.180)	12,0	12,0	140,0	17,0	4,1
TCOHAL 12-2	9825122	1,8-2,7	30,0 (1.180)	12,0	12,0	140,0	17,0	4,1
TCOHAR 14-2	9826142	1,8-2,7	35,1 (1.380)	14,0	14,0	140,0	20,0	2,0
TCOHAL 14-2	9825142	1,8-2,7	35,1 (1.380)	14,0	14,0	140,0	20,0	2,0
TCOHAR 16-2	9826162	1,8-2,7	36,1 (1.420)	16,0	16,0	140,0	-	-
TCOHAL 16-2	9825162	1,8-2,7	36,1 (1.420)	16,0	16,0	140,0	-	-

COMPONENT HOLDER CEDVOR/L

■ RH holders use RH components

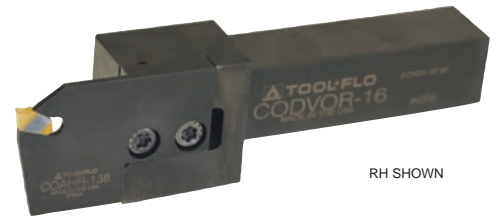

RH SHOWN

Description	EDP Code	A	B	L	F	Anvil Screw
CODVOR-16	92451600	1	1	5.190	1.150	SF95
CODVOL-16	92441600	1	1	5.190	1.150	SF95
CODVOR-20	92452000	1-1/4	1-1/4	5.190	1.400	SF95
CODVOL-20	92442000	1-1/4	1-1/4	5.190	1.400	SF95
CODVOR-24	92452400	1-1/2	1-1/2	5.190	1.650	SF95
CODVOL-24	92442400	1-1/2	1-1/2	5.190	1.650	SF95

*The "C" dimension is determined by the D.O.C. of the anvil.

Metric


Description	EDP Code	A	B	L	F	Anvil Screw
CODVOR-25M	92462500	25,0	25,0	132,0	28,2	SF95
CODVOL-25M	92432500	25,0	25,0	132,0	28,2	SF95
CODVOR-32M	92463200	32,0	32,0	132,0	36,0	SF95
CODVOL-32M	92433200	32,0	32,0	132,0	36,0	SF95
CODVOR-40M	92464000	40,0	40,0	132,0	43,5	SF95
CODVOL-40M	92434000	40,0	40,0	132,0	43,5	SF95

*The "C" dimension is determined by the D.O.C. of the anvil.




CUT OFF

COMPONENTS CUT OFF ANVILS COAHR/L

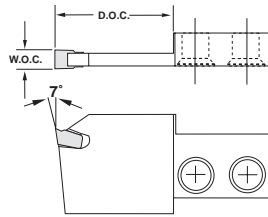

RH SHOWN



Description	EDP Code	Insert	DOC	WOC	Extractor Wrench
COAHR-113	9246113	TFN/R/L	1.250	.071-.106	Extractor Wrench EDP Code: 9HEW1 
COAHL-113	9245113	TFN/R/L	1.250	.071-.106	
COAHR-138	9246138	TFN/R/L	1.375	.106-.139	
COAHL-138	9245138	TFN/R/L	1.375	.106-.139	
COAHR-248	9246248	TFN/R/L	1.500	.139-.178	
COAHL-248	9245248	TFN/R/L	1.500	.139-.178	
COAHR-258	9246258	TFN/R/L	1.750	.178-.217	
COAHL-258	9245258	TFN/R/L	1.750	.178-.217	

CUT OFF

Recommended SFM & IPR for Parting Applications

Workpiece Group	Uncoated	TiN PVD Coated		AlTiN PVD Coated		Feed/IPR
	C22	GP22	GP50	AT22	AT50	
Free Machining Carbon Steels	---	150-300	200-600	200-400	400-800	.003-.008
Plain Carbon Steels	---	150-300	200-600	200-400	400-800	.003-.008
Alloy Steels 190-330 HB	---	150-300	200-500	200-350	400-800	.003-.008
Alloy Steels 330-450 HB	---	150-300	200-450	200-350	400-750	.003-.008
Martensitic/Ferritic Stainless Steel 400 Series	---	150-300	200-500	200-400	350-700	.003-.008
Austenitic Stainless 300 Series	150-300	150-400	---	300-600	---	.002-.007
Gray Cast Iron 190-330 HB	100-350	150-400	---	300-600	---	.002-.007
Gray Cast Iron 330-450 HB	100-300	150-350	---	200-550	---	.002-.007
Alloy / Ductile Irons	---	150-300	200-500	250-450	300-700	.003-.008
Free Machining Aluminum Alloys	100-1500	150-2000	---	600-2200	---	.004-.008
High-Silicon Aluminum Alloys	---	---	---	---	---	---
Copper / Zinc / Brass	100-500	150-700	---	300-900	---	.004-.008
Non-Metallics	100-1000	150-1500	---	350-1200	---	.004-.008
High Temperature Alloys 200-260 HB	80-130	100-175	---	80-200	---	.002-.006
High Temperature Alloys 260-450 HB	50-100	80-150	---	80-175	---	.002-.006
Titanium Alloys (Ti 6Al-4V)	100-200	100-250	---	80-300	---	.002-.006

Bold print items denote the top choices for the materials listed, provided it can be machined within the SFM stated under the appropriate machining conditions. For the best performance in optimal machining conditions, select the grade that will provide you with the highest allowable SFM.



TOOL-FLO




DEEP GROOVING


DEEP GROOVING



Deep Grooving Insert Nomenclature Chart

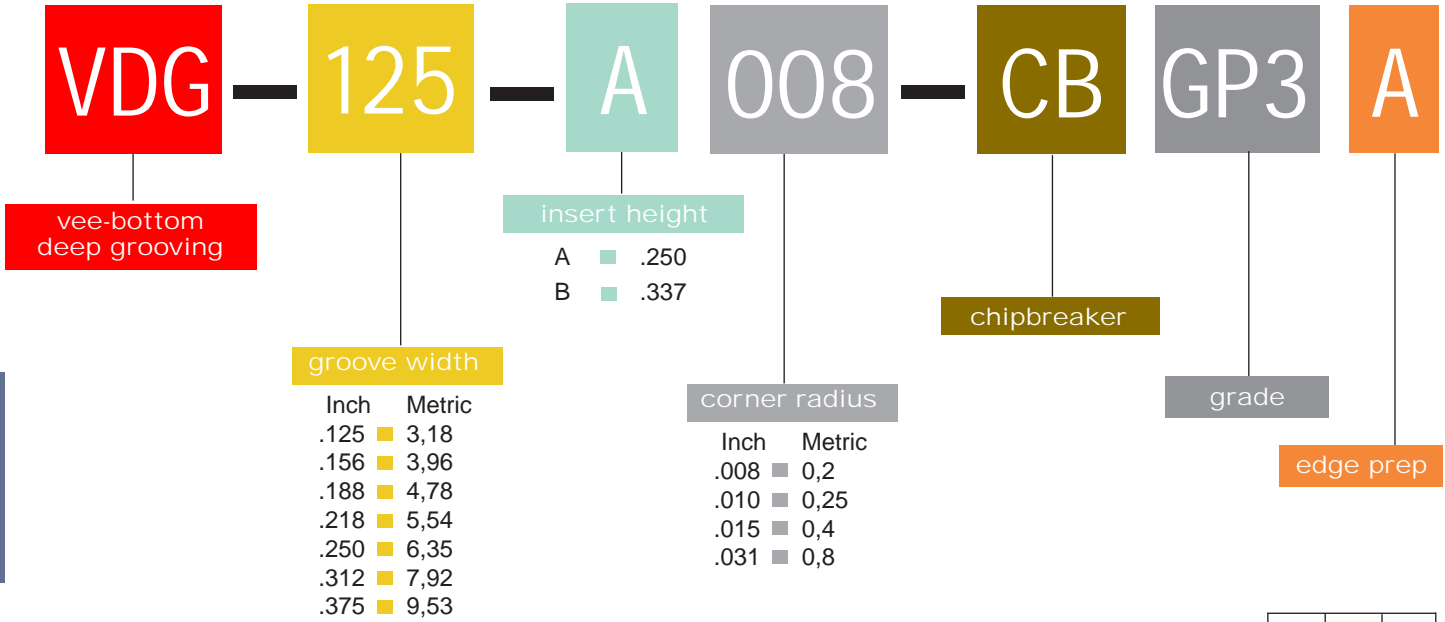

DEEP GROOVING VDG




Description	EDP Code	W		R	L	H	A	Grade						
		Inch	Metric					C3	C6H	GP3	GP50	AC3	AC50	
VDG-125-A008	882125A08	.125	3,18	.008	.500	.250	90°							
VDG-125-A015	82125A	.125	3,18	.015	.500	.250	90°							
VDG-156-A008	82156A08	.156	3,96	.008	.500	.250	90°							
VDG-156-A015	82156A	.156	3,96	.015	.500	.250	90°							
VDG-188-A008	82188A08	.188	4,78	.008	.500	.250	90°							
VDG-188-A015	82188A	.188	4,78	.015	.500	.250	90°							
VDG-188-A031	82188A31	.188	4,78	.031	.500	.250	90°							
VDG-218-A015	82218A	.218	5,54	.015	.500	.250	90°							
VDG-250-B015	82250B	.250	6,35	.015	.500	.337	90°							
VDG-250-B031	82250B31	.250	6,35	.031	.500	.337	90°							
VDG-312-B015	82312B	.312	7,92	.015	.500	.337	90°							
VDG-312-B031	82312B31	.312	7,92	.031	.500	.337	90°							
VDG-375-B015	82375B	.375	9,53	.015	.500	.337	90°							
VDG-375-B031	82375B31	.375	9,53	.031	.500	.337	90°							

DEEP GROOVING VDG-CB

w/patented chipbreaker

Exclusive patented design!



Description	EDP Code	W		R	L	H	A	Grade						
		Inch	Metric					C3	C6H	GP3	GP50	AC3	AC50	
VDG-125-A008-CB	82125A08C	.125	3,18	.008	.500	.250	90°							
VDG-125-A015-CB	82125AC	.125	3,18	.015	.500	.250	90°							
VDG-156-A008-CB	82156A08C	.156	3,96	.008	.500	.250	90°							
VDG-156-A015-CB	82156AC	.156	3,96	.015	.500	.250	90°							
VDG-188-A008-CB	82188A08C	.188	4,78	.008	.500	.250	90°							
VDG-188-A015-CB	82188AC	.188	4,78	.015	.500	.250	90°							
VDG-188-A031-CB	82188A31C	.188	4,78	.031	.500	.250	90°							
VDG-218-A015-CB	82218AC	.218	5,54	.015	.500	.250	90°							
VDG-250-B015-CB	82250BC	.250	6,35	.015	.500	.337	90°							
VDG-250-B031-CB	82250B31C	.250	6,35	.031	.500	.337	90°							
VDG-312-B015-CB	82312BC	.312	7,92	.015	.500	.337	90°							
VDG-312-B031-CB	82312B31C	.312	7,92	.031	.500	.337	90°							
VDG-375-B015-CB	82375BC	.375	9,53	.015	.500	.337	90°							
VDG-375-B031-CB	82375B31C	.375	9,53	.031	.500	.337	90°							

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron			▲			●
Non-Ferrous			●	▲		
Stainless/High Temp			▲	●		
Steel				▲	●	



DEEP GROOVING

DEEP GROOVING VDG METRIC




Description	EDP Code	W		R	L	H	A	Coating						
		Metric	Inch					C3	C6H	GP3	GP50	AC3	AC50	
VDG-3M-A02	823M02	3,00	.118	0,2	12,7	6,35	90°							
VDG-3M-A04	823M04	3,00	.118	0,4	12,7	6,35	90°							
VDG-4M-A02	824M02	4,00	.157	0,2	12,7	6,35	90°							
VDG-4M-A04	824M04	4,00	.157	0,4	12,7	6,35	90°							
VDG-5M-A02	825M02	5,00	.197	0,2	12,7	6,35	90°							
VDG-5M-A04	825M04	5,00	.197	0,4	12,7	6,35	90°							
VDG-6M-B04	826M04	6,00	.236	0,4	12,7	8,55	90°							
VDG-6M-B08	826M08	6,00	.236	0,8	12,7	8,55	90°							
VDG-8M-B04	828M04	8,00	.315	0,4	12,7	8,55	90°							
VDG-8M-B08	828M08	8,00	.315	0,8	12,7	8,55	90°							

DEEP GROOVING VDG-CB

METRIC w/patented chipbreaker

Exclusive patented design!



Description	EDP Code	W		R	L	H	A	Coating						
		Metric	Inch					C3	C6H	GP3	GP50	AC3	AC50	
VDG-3M-A02-CB	823M02C	3,00	.118	0,2	12,7	6,35	90°							
VDG-3M-A04-CB	823M04C	3,00	.118	0,4	12,7	6,35	90°							
VDG-4M-A02-CB	824M02C	4,00	.157	0,2	12,7	6,35	90°							
VDG-4M-A04-CB	824M04C	4,00	.157	0,4	12,7	6,35	90°							
VDG-5M-A02-CB	825M02C	5,00	.197	0,2	12,7	6,35	90°							
VDG-5M-A04-CB	825M04C	5,00	.197	0,4	12,7	6,35	90°							
VDG-6M-B04-CB	826M04C	6,00	.236	0,4	12,7	8,55	90°							
VDG-6M-B08-CB	826M08C	6,00	.236	0,8	12,7	8,55	90°							
VDG-8M-B04-CB	828M04C	8,00	.315	0,4	12,7	8,55	90°							
VDG-8M-B08-CB	828M08C	8,00	.315	0,8	12,7	8,55	90°							


In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up-to-date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron			▲			●
Non-Ferrous		●		▲		
Stainless/High Temp		▲		●		
Steel			▲			●

EXTERNAL STRAIGHT HOLDER CEDVOR/L

RH holders use RH components

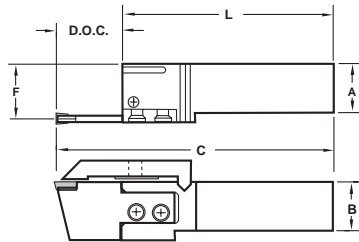

RH SHOWN



Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	A	B	L	F	Clamp Screw	Anvil Screw
CEDVOR-16	91951600	1	1	5.190	1.150	SB90	SF95
CEDVOL-16	91901600	1	1	5.190	1.150	SB90	SF95
CEDVOR-20	91952000	1-1/4	1-1/4	5.190	1.150	SB90	SF95
CEDVOL-20	91902000	1-1/4	1-1/4	5.190	1.150	SB90	SF95
CEDVOR-24	91952400	1-1/2	1-1/2	5.190	1.400	SB90	SF95
CEDVOL-24	91902400	1-1/2	1-1/2	5.190	1.400	SB90	SF95

*The "C" dimension is determined by the D.O.C. of the anvil.

METRIC

Description	EDP Code	A	B	L	F	Clamp Screw	Anvil Screw
CEDVOR-25M	91962500	25,0	25,0	132,0	28,5	SB90	SF95
CEDVOL-25M	91912500	25,0	25,0	132,0	28,5	SB90	SF95
CEDVOR-32M	91963200	32,0	32,0	132,0	28,5	SB90	SF95
CEDVOL-32M	91913200	32,0	32,0	132,0	28,5	SB90	SF95
CEDVOR-40M	91964000	40,0	40,0	132,0	36,0	SB90	SF95
CEDVOL-40M	91914000	40,0	40,0	132,0	36,0	SB90	SF95

*The "C" dimension is determined by the D.O.C. of the anvil.

DEEP GROOVING


DEEP GROOVING




COMPONENTS

DGAHR/L

Anvils for CEDVOR/L



RH SHOWN





Description	EDP Code	Insert	DOC	WOC	Clamp
DGAHR-113	9263113	VDG	1.250	.125	DGCHR-132
DGAHL-113	9262113	VDG	1.250	.125	DGCHL-132
DGAHR-138	9263138	VDG	1.375	.170-.188	DGCHR-382
DGAHL-138	9262138	VDG	1.375	.170-.188	DGCHL-382
DGAHR-248	9263248	VDG	1.500	.218	DGCHR-482
DGAHL-248	9262248	VDG	1.500	.218	DGCHL-482
DGAHR-258	9263258	VDG	1.500	.250-.312	DGCHR-500
DGAHL-258	9262258	VDG	1.500	.250-.312	DGCHL-500
DGAHR-268	9263268	VDG	1.750	.350-.375	DGCHR-582
DGAHL-268	9262268	VDG	1.750	.350-.375	DGCHL-582

DEEP GROOVING FLGT

Double ended

Exclusive TOOL-FLO design!



Description	EDP Code	W		R	T	E	A	B	Gage Dia	Coating							
		Inch	Metric							Uncoated	TiN Coated	AlTiN Coated	C3	C6H	GP3	GP50	AC3
FLGT-3094R	6332094R	.094	2,39	.005/.010	.195	.275	.344	.855	.3750			●	●	●	●	●	●
FLGT-3094L	6332094L	.094	2,39	.005/.010	.195	.275	.344	.855	.3750			●	●	●	●	●	●
FLGT-3125R	6332125R	.125	3,18	.005/.010	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-3125L	6332125L	.125	3,18	.005/.010	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-3189R	6332189R	.189	4,80	.020/.025	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-3189L	6332189L	.189	4,80	.020/.025	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-4125R	6342125R	.125	3,18	.005/.010	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-4125L	6342125L	.125	3,18	.005/.010	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-4189R	6342189R	.189	4,80	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-4189L	6342189L	.189	4,80	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-4250R	6342250R	.250	6,35	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-4250L	6342250L	.250	6,35	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●


METRIC

Description	EDP Code	W		R	T	E	A	B	Gage Dia	Coating							
		Metric	Inch							Uncoated	TiN Coated	AlTiN Coated	C3	C6H	GP3	GP50	AC3
FLGT-330R	633230R	3,00	.118	.005/.010	.195	.275	.344	.855	.3750			●	●	●	●	●	●
FLGT-330L	633230L	3,00	.118	.005/.010	.195	.275	.344	.855	.3750			●	●	●	●	●	●
FLGT-340R	633240R	4,00	.157	.005/.010	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-340L	633240L	4,00	.157	.005/.010	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLGT-450R	6344250R	5,00	.197	.020/.025	.255	.550	.453	1.136	.3750		●	●	●	●	●	●	●
FLGT-450L	6344250L	5,00	.197	.020/.025	.255	.550	.453	1.136	.3750		●	●	●	●	●	●	●
FLGT-460R	6344260R	6,00	.236	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLGT-460L	6344260L	6,00	.236	.020/.025	.255	.550	.453	1.136	.3750			●	●	●	●	●	●

FLRT

Full Nose Radius - Double ended

Exclusive TOOL-FLO design!



Description	EDP Code	W		R	T	E	A	B	Gage Dia	Coating							
		Inch	Metric							Uncoated	TiN Coated	AlTiN Coated	C3	C6H	GP3	GP50	AC3
FLRT-3062R	6337062R	.125	3,18	.062	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLRT-3062L	6337062L	.125	3,18	.062	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLRT-3094R	6337094R	.189	4,80	.094	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLRT-3094L	6337094L	.189	4,80	.094	.195	.437	.344	.855	.3750			●	●	●	●	●	●
FLRT-4062R	6347062R	.125	3,18	.062	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLRT-4062L	6347062L	.125	3,18	.062	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLRT-4094R	6347094R	.189	4,80	.094	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLRT-4094L	6347094L	.189	4,80	.094	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLRT-4125R	6347125R	.250	6,35	.125	.255	.550	.453	1.136	.3750			●	●	●	●	●	●
FLRT-4125L	6347125L	.250	6,35	.125	.255	.550	.453	1.136	.3750			●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	Uncoated	TiN Coated	AlTiN Coated
Cast Iron		▲	●
Non-Ferrous	●	▲	
Stainless/High Temp	▲	●	
Steel		▲	●





DEEP GROOVING

EXTERNAL HOLDER FLSR/LT

For double ended FLGT/FLRT inserts
Inch

Exclusive TOOL-FLO design!

Most holders available with coolant port
(ie: Add CP to end of description)

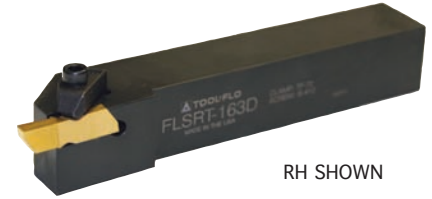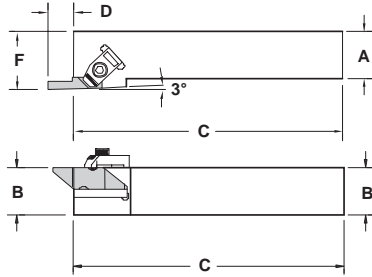

Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLSRT-163D	93431616D	FLGT-3R	1.000	1.000	6.000	.440	1.250	TF-72	S-412
FLSLT-163D	93421616D	FLGT-3L	1.000	1.000	6.000	.440	1.250	TF-73	S-412
FLSRT-203D	93432016D	FLGT-3R	1.250	1.250	6.000	.440	1.500	TF-72	S-412
FLSLT-203D	93422016D	FLGT-3L	1.250	1.250	6.000	.440	1.500	TF-73	S-412
FLSRT-164D	93431620D	FLGT-4R	1.000	1.000	6.000	.560	1.250	TF-72	S-412
FLSLT-164D	93421620D	FLGT-4L	1.000	1.000	6.000	.560	1.250	TF-73	S-412
FLSRT-204D	93432020D	FLGT-4R	1.250	1.250	6.000	.560	1.500	TF-72	S-412
FLSLT-204D	93422020D	FLGT-4L	1.250	1.250	6.000	.560	1.500	TF-73	S-412

METRIC



Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLSRT-2525M3	934325M16	FLGT/RT-3R	25,0	25,0	152,4	11,2	32,0	TF-72	S-412
FLSLT-2525M3	934225M16	FLGT/RT-3L	25,0	25,0	152,4	11,2	32,0	TF-73	S-412
FLSRT-3232M3	934332M16	FLGT/RT-3R	32,0	32,0	152,4	11,2	40,0	TF-72	S-412
FLSLT-3232M3	934232M16	FLGT/RT-3L	32,0	32,0	152,4	11,2	40,0	TF-73	S-412
FLSRT-2525M4	934325M20	FLGT/RT-4R	25,0	25,0	152,4	14,2	32,0	TF-72	S-412
FLSLT-2525M4	934225M20	FLGT/RT-4L	25,0	25,0	152,4	14,2	32,0	TF-73	S-412
FLSRT-3232M4	934332M20	FLGT/RT-4R	32,0	32,0	152,4	14,2	40,0	TF-72	S-412
FLSLT-3232M4	934232M20	FLGT/RT-4L	32,0	32,0	152,4	14,2	40,0	TF-73	S-412

FLER/LT

For double ended FLGT/FLRT inserts

Exclusive TOOL-FLO design!

Most holders available with coolant port
(ie: Add CP to end of description)

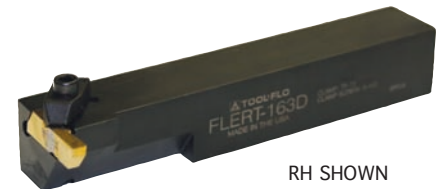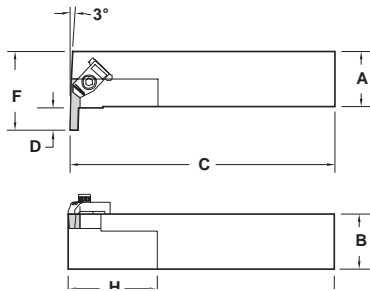

Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLERT-163D	93111616D	FLGT-3L	1.000	1.000	6.000	.440	1.250	TF-72	S-412
FLELT-163D	93011616D	FLGT-3R	1.000	1.000	6.000	.440	1.250	TF-73	S-412
FLERT-203D	93112016D	FLGT-3L	1.250	1.250	6.000	.440	1.500	TF-72	S-412
FLELT-203D	93012016D	FLGT-3R	1.250	1.250	6.000	.440	1.500	TF-73	S-412
FLERT-164D	93111620D	FLGT-4L	1.000	1.000	6.000	.560	1.250	TF-72	S-412
FLELT-164D	93011620D	FLGT-4R	1.000	1.000	6.000	.560	1.250	TF-73	S-412
FLERT-204D	93112020D	FLGT-4L	1.250	1.250	6.000	.560	1.500	TF-72	S-412
FLELT-204D	93012020D	FLGT-4R	1.250	1.250	6.000	.560	1.500	TF-73	S-412


DEEP GROOVING



INTERNAL BAR A_FLER/LT

For double ended FLGT/FLRT inserts
Inch

Exclusive TOOL-FLO design!

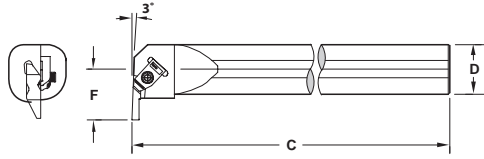

Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw
A20-FLERT3	96552016	FLGT/RT-3L	1.250	6.000	1.082	1.807	TF-72	S-412
A20-FLELT3	96452016	FLGT/RT-3R	1.250	6.000	1.082	1.807	TF-73	S-412
A24-FLERT3	96552416	FLGT/RT-3L	1.500	6.000	1.207	2.057	TF-72	S-412
A24-FLELT3	96452416	FLGT/RT-3R	1.500	6.000	1.207	2.057	TF-73	S-412
A28-FLERT4	96552820	FLGT/RT-4L	1.750	6.000	1.500	2.475	TF-72	S-412
A28-FLELT4	96452820	FLGT/RT-4R	1.750	6.000	1.500	2.475	TF-73	S-412

METRIC

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw
A32M-FLERT3	96442016	FLGT/RT-3L	32,0	152,4	27,48	46,0	TF-72	S-412
A32M-FLELT3	96432016	FLGT/RT-3R	32,0	152,4	27,48	46,0	TF-73	S-412
A40M-FLERT3	96442416	FLGT/RT-3L	40,0	152,4	31,60	54,15	TF-72	S-412
A40M-FLELT3	96432416	FLGT/RT-3R	40,0	152,4	31,60	54,15	TF-73	S-412
A50M-FLERT4	96442820	FLGT/RT-4L	50,0	152,4	40,87	68,43	TF-72	S-412
A50M-FLELT4	96432820	FLGT/RT-4R	50,0	152,4	40,87	68,43	TF-73	S-412


Recommended SFM & IPR for Deep Grooving Applications

Workpiece Group	Uncoated		TIN PVD Coated		AlTiN PVD Coated		Feed/IPR	
	C3	GP3	GP50	AT3	AT50	Neutral Rake	Chipbreaker	
Free Machining Carbon Steels	---	200-400	200-600	250-450	400-800	.004-.010	.005-.014	
Plain Carbon Steels	---	200-400	200-600	250-450	400-800	.004-.010	.005-.014	
Alloy Steels 190-330 HB	---	200-400	200-500	250-400	400-800	.004-.010	.005-.014	
Alloy Steels 330-450 HB	---	200-350	200-450	250-400	400-750	.003-.009	.005-.012	
Martensitic/Ferritic Stainless Steel 400 Series	---	200-400	200-500	250-450	350-700	.004-.010	.005-.014	
Austenitic Stainless 300 Series	200-300	200-500	---	250-700	---	.003-.009	.004-.008	
Gray Cast Iron 190-330 HB	100-300	200-600	---	250-700	---	.004-.010	---	
Gray Cast Iron 330-450 HB	100-250	200-500	---	200-600	---	.003-.009	---	
Alloy / Ductile Irons	100-250	200-400	200-500	200-450	300-700	.004-.010	.005-.014	
Free Machining Aluminum Alloys	500-1500	300-2000	---	600-2500	---	.005-.012	.008-.016	
High-Silicon Aluminum Alloys	---	---	---	---	---	---	---	
Copper / Zinc / Brass	200-700	200-900	---	400-1000	---	.005-.012	.007-.016	
Non-Metallics	400-1400	300-1500	---	400-1500	---	.005-.012	---	
High Temperature Alloys 200-260 HB	80-130	100-200	---	100-250	---	.003-.006	.004-.007	
High Temperature Alloys 260-450 HB	50-100	100-175	---	100-200	---	.003-.006	.004-.007	
Titanium Alloys (Ti 6Al-4V)	100-200	150-300	---	100-300	---	.003-.006	.004-.008	

Bold print items denote the top choices for the materials listed, provided it can be machined within the SFM stated under the appropriate machining conditions. For the best performance in optimal machining conditions, select the grade that will provide you with the highest allowable SFM.



TOOL FLO

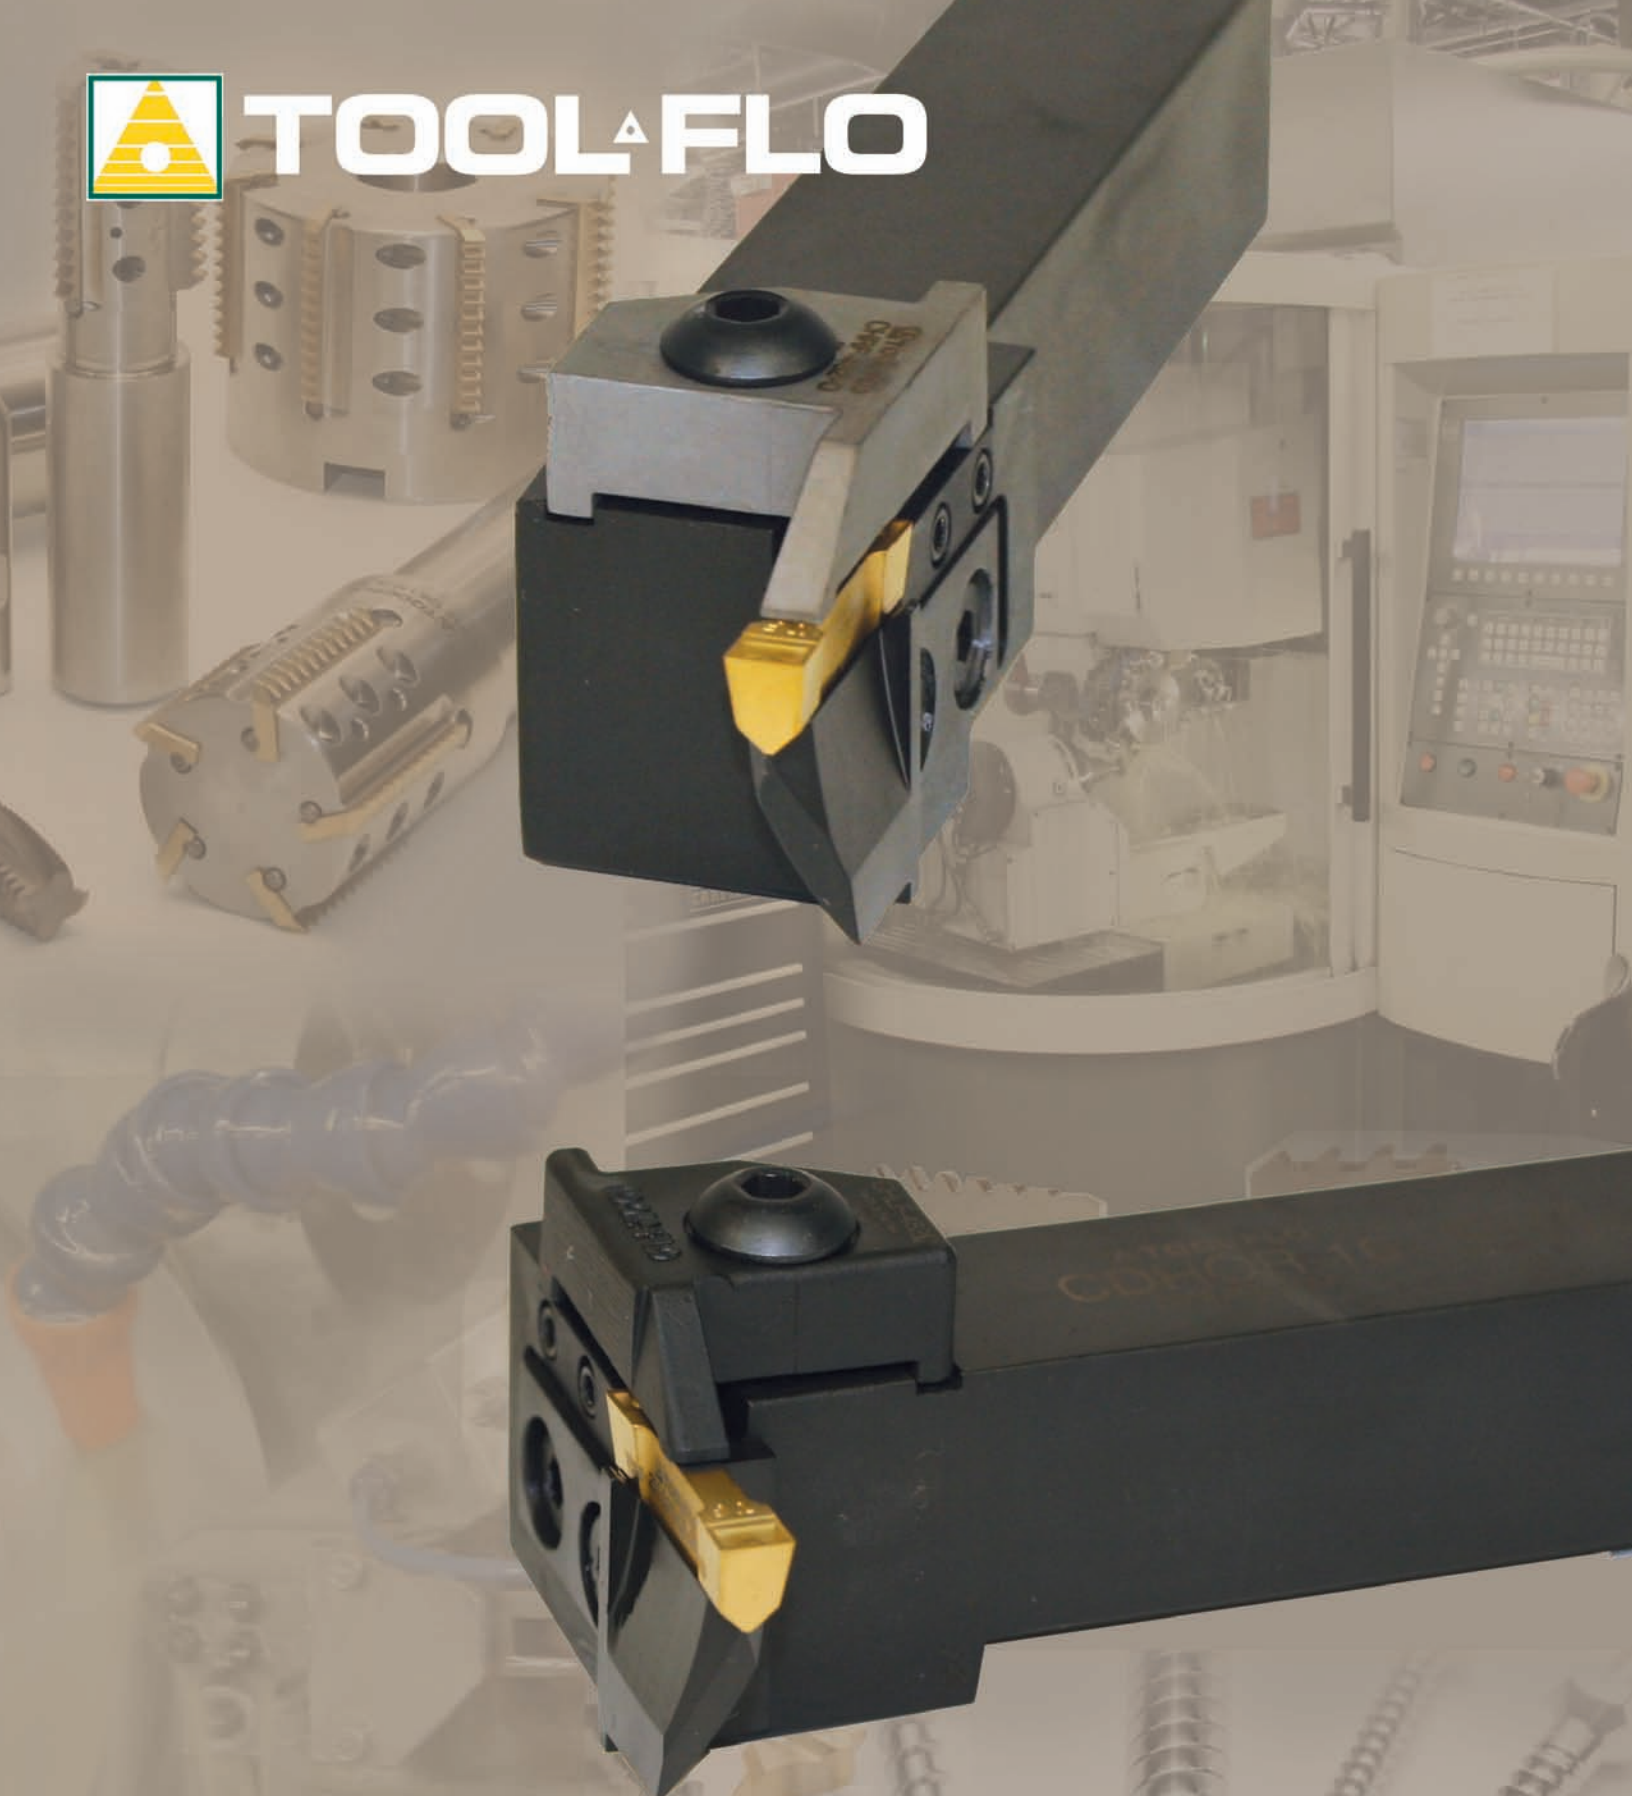

**FACE
GROOVING**

FACE GROOVING




FACE GROOVING

FLF-CB


w/Patented chipbreaker

■ For holders see next page.

Exclusive patented design!




RH SHOWN



Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating					
									C3	C6H	GP3	GP50	AC3	AC50
FLF-3125R-CB	563025PR	.125	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3125L-CB	563025PL	.125	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3156R-CB	563056PR	.156	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3156L-CB	563056PL	.156	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3188R-CB	563088PR	.188	.020/.025	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3188L-CB	563088PL	.188	.020/.025	.195	.180	.344	.4050	.3750			●	●	●	●

FLF

■ For holders see next page.

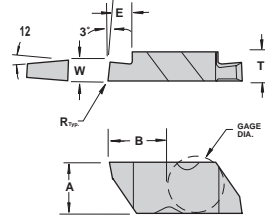

RH SHOWN




Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating					
									C3	C6H	GP3	GP50	AC3	AC50
FLF-3125R	563025R	.125	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3125L	563025L	.125	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3156R	563056R	.156	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3156L	563056L	.156	.005/.010	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3188R	563088R	.188	.020/.025	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-3188L	563088L	.188	.020/.025	.195	.180	.344	.4050	.3750			●	●	●	●
FLF-4250R	564250R	.250	.020/.025	.255	.290	.453	.6360	.3750			●	●	●	●
FLF-4250L	564250L	.250	.020/.025	.255	.290	.453	.6360	.3750			●	●	●	●
FLF-6218R	566218R	.218	.030/.035	.383	.290	.453	.6360	.3750						
FLF-6218L	566218L	.218	.030/.035	.383	.290	.453	.6360	.3750						
FLF-6250R	566250R	.250	.030/.035	.383	.290	.453	.6360	.3750						
FLF-6250L	566250L	.250	.030/.035	.383	.290	.453	.6360	.3750						
FLF-6375R	566475R	.375	.030/.035	.383	.290	.453	.6360	.3750						
FLF-6375L	566475L	.375	.030/.035	.383	.290	.453	.6360	.3750						


FLFD

Single ended - Deep Grooving

■ For holders see next page.

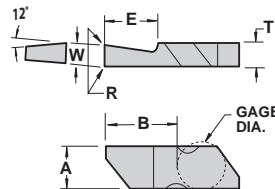

RH SHOWN



Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating					
									C3	C6H	GP3	GP50	AC3	AC50
FLFD-3125R	6338125R	.125	.005/.010	.195	.270	.344	.4050	.3750			●	●	●	●
FLFD-3125L	6338125L	.125	.005/.010	.195	.270	.344	.4050	.3750			●	●	●	●
FLFD-4189R	6348189R	.189	.020/.025	.255	.390	.453	.7610	.3750			●	●	●	●
FLFD-4189L	6348189L	.189	.020/.025	.255	.390	.453	.7610	.3750			●	●	●	●
FLFD-4250R	6348250R	.250	.020/.025	.255	.520	.453	.8860	.3750			●	●	●	●
FLFD-4250L	6348250L	.250	.020/.025	.255	.520	.453	.8860	.3750			●	●	●	●

FLFD-CB


Single ended - Deep Grooving

w/Patented chipbreaker

■ For holders see next page.

Exclusive patented design!

RH SHOWN



Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating					
									C3	C6H	GP3	GP50	AC3	AC50
FLFD-3125R-CB	6338125PR	.125	.005/.010	.195	.270	.344	.5050	.3750			●	●	●	●
FLFD-3125L-CB	6338125PL	.125	.005/.010	.195	.270	.344	.5050	.3750			●	●	●	●
FLFD-4189R-CB	6348189PR	.189	.020/.025	.255	.390	.453	.7610	.3750			●	●	●	●
FLFD-4189L-CB	6348189PL	.189	.020/.025	.255	.390	.453	.7610	.3750			●	●	●	●
FLFD-4250R-CB	6348250PR	.250	.020/.025	.255	.500	.453	.8860	.3750			●	●	●	●
FLFD-4250L-CB	6348250PL	.250	.020/.025	.255	.500	.453	.8860	.3750			●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron			▲		●	
Non-Ferrous		●		▲		
Stainless/High Temp		▲		●		
Steel			▲		●	





FACE GROOVING

EXTERNAL HOLDERS

FLER/L

90° for FLF/FLFD inserts



Most holders available with coolant port
(ie: Add CP to end of description)

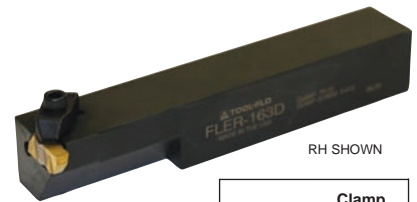

Description	EDP Code	Insert	A	B	C	D	F	H	Clamp	Clamp Screw
FLER-123B	93101216B	FL-3L	.750	.750	4.500	.210	1.125	1.500	TF-73	S-412
FLER-123B	93001216B	FL-3R	.750	.750	4.500	.210	1.125	1.500	TF-72	S-412
FLER-163D	93101616D	FL-3L	1.000	1.000	6.000	.210	1.250	2.000	TF-73	S-412
FLER-163D	93001616D	FL-3R	1.000	1.000	6.000	.210	1.250	2.000	TF-72	S-412
FLER-203D	93102016D	FL-3L	1.250	1.250	6.000	.210	1.500	2.000	TF-73	S-412
FLER-203D	93002016D	FL-3R	1.250	1.250	6.000	.210	1.500	2.000	TF-72	S-412
FLER-164D	93101620D	FL-4L	1.000	1.000	6.000	.290	1.375	2.000	TF-73	S-412
FLER-164D	93001620D	FL-4R	1.000	1.000	6.000	.290	1.375	2.000	TF-72	S-412
FLER-204D	93102020D	FL-4L	1.250	1.250	6.000	.290	1.625	2.000	TF-73	S-412
FLER-204D	93002020D	FL-4R	1.250	1.250	6.000	.290	1.625	2.000	TF-72	S-412
FLER-206D	93102028D	FL-6L	1.250	1.250	6.000	.290	1.625	2.000	TF-121	S-412
FLER-206D	93002028D	FL-6R	1.250	1.250	6.000	.290	1.625	2.000	TF-120	S-412

FLSR/L

Straight for FLF/FLFD inserts

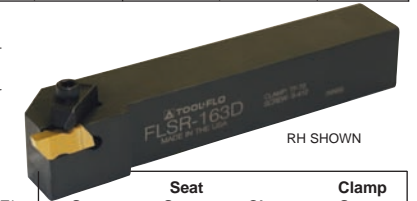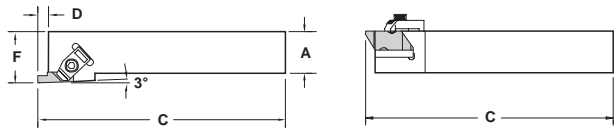


Most holders available with coolant port (ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	D	F*	Seat	Seat Screw	Clamp	Clamp Screw
FLSR-123B	93401216B	FL-3R	.750	.750	4.500	.210	1.000	---	---	TF-72	S-412
FLSL-123B	93301216B	FL-3L	.750	.750	4.500	.210	1.000	---	---	TF-73	S-412
FLSR-163C	93401616C	FL-3R	1.000	1.000	5.000	.210	1.250	---	---	TF-72	S-412
FLSL-163C	93301616C	FL-3L	1.000	1.000	5.000	.210	1.250	---	---	TF-73	S-412
FLSR-163D	93401616D	FL-3R	1.000	1.000	6.000	.210	1.250	---	---	TF-72	S-412
FLSL-163D	93301616D	FL-3L	1.000	1.000	6.000	.210	1.250	---	---	TF-73	S-412
FLSR-203D	93402016D	FL-3R	1.250	1.250	6.000	.210	1.500	---	---	TF-72	S-412
FLSL-203D	93302016D	FL-3L	1.250	1.250	6.000	.210	1.500	---	---	TF-73	S-412
FLSR-164D	93401620D	FL-4R	1.000	1.000	6.000	.290	1.250	SM-420	SL-344	TF-72	S-412
FLSL-164D	93301620D	FL-4L	1.000	1.000	6.000	.290	1.250	SM-420	SL-344	TF-73	S-412
FLSR-204D	93402020D	FL-4R	1.250	1.250	6.000	.290	1.500	SM-420	SL-344	TF-72	S-412
FLSL-204D	93302020D	FL-4L	1.250	1.250	6.000	.290	1.500	SM-420	SL-344	TF-73	S-412
FLSR-206D	93402028D	FL-6R	1.250	1.250	6.000	.290	1.500	SM-416	SL-111	TF-120	S-412
FLSL-206D	93302028D	FL-6L	1.250	1.250	6.000	.290	1.500	SM-416	SL-111	TF-121	S-412

FACE/DEEP GROOVING

FLFT

Double ended - Deep Face Grooving

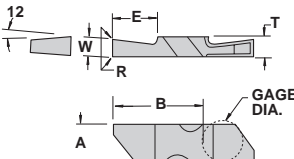


Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating						
									C3	C6H	GP3	GP50	AC3	AC50	
FLFT-3125R	6339125R	.125	.005/.010	.195	.375	.344	.855	.3750							
FLFT-3125L	6339125L	.125	.005/.010	.195	.375	.344	.855	.3750			●	●	●		
FLFT-4189R	6349189R	.189	.020/.025	.255	.550	.453	1.136	.3750			●	●	●		
FLFT-4189L	6349189L	.189	.020/.025	.255	.550	.453	1.136	.3750			●	●	●		
FLFT-4250R	6349250R	.250	.020/.025	.255	.550	.453	1.136	.3750			●	●	●		
FLFT-4250L	6349250L	.250	.020/.025	.255	.550	.453	1.136	.3750			●	●	●		

EXTERNAL HOLDERS

FLSRT/LT

Straight for FLFT inserts

Most holders available with coolant port
(ie: Add CP to end of description)



Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLSRT-163D	93431616D	FLFT-3R	1.000	1.000	6.000	.440	1.250	TF-72	S-412
FLSLT-163D	93421616D	FLFT-3L	1.000	1.000	6.000	.440	1.250	TF-73	S-412
FLSRT-203D	93432016D	FLFT-3R	1.250	1.250	6.000	.440	1.500	TF-72	S-412
FLSLT-203D	93422016D	FLFT-3L	1.250	1.250	6.000	.440	1.500	TF-73	S-412
FLSRT-164D	93431620D	FLFT-4R	1.000	1.000	6.000	.560	1.250	TF-72	S-412
FLSLT-164D	93421620D	FLFT-4L	1.000	1.000	6.000	.560	1.250	TF-73	S-412
FLSRT-204D	93432020D	FLFT-4R	1.250	1.250	6.000	.560	1.500	TF-72	S-412
FLSLT-204D	93422020D	FLFT-4L	1.250	1.250	6.000	.560	1.500	TF-73	S-412



FACE GROOVING



INTERNAL FACE GROOVING

FLFD-I

Single ended - Internal Deep/Face Grooving





Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating						
									C3	C6H	GP3	GP50	AC3	AC50	
FLFD-3125RI	6338125RI	.125	.005/.010	.195	.270	.344	.5050	.3750							
FLFD-3125LI	6338125LI	.125	.005/.010	.195	.270	.344	.5050	.3750			●	●	●	●	
FLFD-3189RI	6338189RI	.189	.020/.025	.195	.270	.344	.5050	.3750			●	●	●	●	
FLFD-3189LI	6338189LI	.189	.020/.025	.195	.270	.344	.5050	.3750			●	●	●	●	

INTERNAL FACE GROOVING

FLFD-I-CB

Single ended - Internal Deep/Face Grooving w/Patented chipbreaker

Exclusive patented design!



Description	EDP Code	W	R	T	E	A	B	Gage Dia	Coating						
									C3	C6H	GP3	GP50	AC3	AC50	
FLFD-3125RI-CB	6338125PRI	.125	.005/.010	.195	.270	.344	.5050	.3750			●	●	●	●	
FLFD-3125LI-CB	6338125PLI	.125	.005/.010	.195	.270	.344	.5050	.3750			●	●	●	●	
FLFD-3189RI-CB	6338189PRI	.189	.020/.025	.195	.270	.344	.5050	.3750			●	●	●	●	
FLFD-3189LI-CB	6338189PLI	.189	.020/.025	.195	.270	.344	.5050	.3750			●	●	●	●	

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron			▲			●
Non-Ferrous		●		▲		
Stainless/High Temp			▲	●		
Steel				▲		●

INTERNAL BARS

A-FLSR/L


For FLFD-I inserts w/Coolant hole

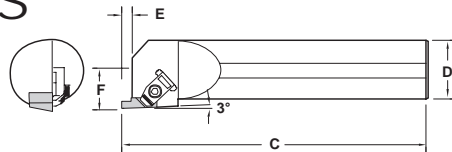

Description	EDP Code	Insert	Min. Bore	E	D	C	F	Clamp	
								Clamp	Screw
A16-FLSR3	96521616	FLFD-3RI	2.250	.290	1.000	12.000	.640	TF-72	S-412
A16-FLSL3	96421616	FLFD-3LI	2.250	.290	1.000	12.000	.640	TF-73	S-412
A20-FLSR3	96522016	FLFD-3RI	2.250	.290	1.250	14.000	.765	TF-72	S-412
A20-FLSL3	96422016	FLFD-3LI	2.250	.290	1.250	14.000	.765	TF-73	S-412
A24-FLSR3	96522416	FLFD-3RI	2.250	.290	1.500	14.000	.890	TF-72	S-412
A24-FLSL3	96422416	FLFD-3LI	2.250	.290	1.500	14.000	.890	TF-73	S-412
A28-FLSR3	96522816	FLFD-3RI	2.250	.290	1.750	14.000	1.015	TF-72	S-412
A28-FLSL3	96422816	FLFD-3LI	2.250	.290	1.750	14.000	1.015	TF-73	S-412
A32-FLSR3	96523216	FLFD-3RI	2.375	.290	2.000	16.000	1.281	TF-72	S-412
A32-FLSL3	96423216	FLFD-3LI	2.375	.290	2.000	16.000	1.281	TF-73	S-412

FACE GROOVING

VDB



Description	EDP Code	Inch	Metric	R	L	H	S	Coating						
								C25	C3	GP3	GP50	AC3	AC50	
VDB 125 A008	79125A08	.125	3,18	.008	1.125	.250	.106							
VDB 125 A015	79125A	.125	3,18	.015	1.125	.250	.106	●		●	●	●	●	●
VDB 156 A008	79156A08	.156	3,96	.008	1.125	.250	.106							
VDB 156 A015	79156A	.156	3,96	.015	1.125	.250	.106	●		●	●	●	●	●
VDB 188 A008	79188A08	.188	4,78	.008	1.125	.250	.144							
VDB 188 A015	79188A	.188	4,78	.015	1.125	.250	.144	●		●	●	●	●	●
VDB 188 A031	79188A031	.188	4,78	.031	1.125	.250	.144							
VDB 218-A015	79218A	.218	5,54	.015	1.125	.250	.144							
VDB 250 A015	79250A	.250	6,35	.015	1.125	.250	.144	●		●	●	●	●	●
VDB 250 B015	79250B	.250	6,35	.015	1.125	.337	.144	●		●	●	●	●	●
VDB 250 B031	79250B031	.250	6,35	.031	1.125	.337	.144			●	●	●	●	●
VDB 281 B015	79281B	.281	7,14	.015	1.125	.337	.202			●	●	●	●	●
VDB 312 B015	79312B	.312	7,92	.015	1.125	.337	.202			●	●	●	●	●
VDB 312 B031	79312B031	.312	7,92	.031	1.125	.337	.202			●	●	●	●	●
VDB 344 B015	79344B	.344	8,74	.015	1.125	.337	.276			●	●	●	●	●
VDB 344 B031	79344B031	.344	8,74	.031	1.125	.337	.276			●	●	●	●	●
VDB 375 B015	79375B	.375	9,53	.015	1.125	.337	.276			●	●	●	●	●
VDB 375 B031	79375B031	.375	9,53	.031	1.125	.337	.276			●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Material	C25	C3	GP3	GP50	AC3	AC50
Cast Iron			▲			●
Non-Ferrous		●		▲		
Stainless/High Temp			▲	●		
Steel				▲		●




FACE GROOVING

FACE GROOVING VDB-CB

w/Patented chipbreaker

Exclusive patented design!




Description	EDP Code	Inch	Metric	W	R	L	H	S	Coating				
									C25	C3	GP3	GP50	AC3
VDB 125 A008-CB	79125A08P	.125	3.18	.008	1.125	.250	.106	●			●	●	●
VDB 125 A015-CB	79125AP	.125	3.18	.015	1.125	.250	.106	●			●	●	●
VDB 156 A008-CB	79156A08P	.156	3.96	.008	1.125	.250	.106	●			●	●	●
VDB 156 A015-CB	79156AP	.156	3.96	.015	1.125	.250	.106	●			●	●	●
VDB 188 A008-CB	79188A08P	.188	4.78	.008	1.125	.250	.144	●			●	●	●
VDB 188 A015-CB	79188AP	.188	4.78	.015	1.125	.250	.144	●			●	●	●
VDB 188 A031-CB	79188A031P	.188	4.78	.031	1.125	.250	.144	●			●	●	●
VDB 218-A015-CB	79218AP	.218	5.54	.015	1.125	.250	.144	●			●	●	●
VDB 250 B015-CB	79250BP	.250	6.35	.015	1.125	.337	.144	●			●	●	●
VDB 250 B031-CB	79250B031P	.250	6.35	.031	1.125	.337	.144	●			●	●	●
VDB 312 B015-CB	79312BP	.312	7.92	.015	1.125	.337	.202	●			●	●	●
VDB 312 B031-CB	79312B031P	.312	7.92	.031	1.125	.337	.202	●			●	●	●
VDB 375 B015-CB	79375BP	.375	8.74	.015	1.125	.337	.276	●			●	●	●
VDB 375 B031-CB	79375B031P	.375	8.74	.031	1.125	.337	.276	●			●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C25	C3	GP3	GP50	AC3	AC50
Cast Iron			▲			●
Non-Ferrous		●		▲		
Stainless/High Temp		▲		▲		
Steel			▲			●

EXTERNAL 90° HOLDER CDHOR/L (RH HOLDERS USE LH COMPONENTS)




RH SHOWN

Metric holders on page 216.

Description	EDP Code	A	B	C	F*		Clamp Screw	Stop Screw	Anvil Screw
					.312(1)	.812(1)			
CDHOR-16	92101600	1	1	6	1.312	1.812	SB90	SS20	SF95
CDHOL-16	92001600	1	1	6	1.312	1.812	SB90	SS20	SF95
CDHOR-20	92102000	1-1/4	1-1/4	6	1.562	2.062	SB90	SS20	SF95
CDHOL-20	92002000	1-1/4	1-1/4	6	1.562	2.062	SB90	SS20	SF95
CDHOR-24	92102400	1-1/2	1-1/2	6	1.812	2.312	SB90	SS20	SF95
CDHOL-24	92002400	1-1/2	1-1/2	6	1.812	2.312	SB90	SS20	SF95

*The "F" dimension is determined by the D.O.C. of the anvil.

EXTERNAL STRAIGHT HOLDER CDVOR/L (RH HOLDERS USE RH COMPONENTS)




RH SHOWN

Metric holders on page 216.

Description	EDP Code	A	B	C	F	Clamp Screw	Stop Screw	Anvil Screw
CDVOL-16	92301600	1	1	*	1.150	SB90	SS20	SF95
CDVOR-20	92402000	1-1/4	1-1/4	*	1.400	SB90	SS20	SF95
CDVOL-20	92302000	1-1/4	1-1/4	*	1.400	SB90	SS20	SF95
CDVOR-24	92402400	1-1/2	1-1/2	*	1.650	SB90	SS20	SF95
CDVOL-24	92302400	1-1/2	1-1/2	*	1.650	SB90	SS20	SF95

*The "C" dimension is determined by the D.O.C. of the anvil.

FACE GROOVING COMPONENTS FOR CDHOR/L AND CDVOR/L



RH SHOWN

Description	EDP Code	Insert	Range	DOC	WOC	Clamp	Stop Block
AFHR-128-O	91211280	DBP24/VDB125	2.750-3.000	.812	.105-.125	CHRF-282O	SBH-1
AFHL-128-I	91201281	DBP24/VDB125	2.750-3.000	.812	.105-.125	CHLF-282I	SBH-1
AFHL-128-O	91201280	DBP24/VDB125	2.750-3.000	.812	.105-.125	CHLF-282O	SBH-1
AFHR-138-I	91211381	DBP34/VDB188	3.000-4.000	.812	.170-.188	CHRF-382I	SBH-1
AFHR-138-O	91211380	DBP34/VDB188	3.000-4.000	.812	.170-.188	CHRF-382O	SBH-1
AFHL-138-I	91201381	DBP34/VDB188	3.000-4.000	.812	.170-.188	CHLF-382I	SBH-1
AFHL-138-O	91201380	DBP34/VDB188	3.000-4.000	.812	.170-.188	CHLF-382O	SBH-1
AFHR-148-I	91211481	VDB250A	3.000-4.000	.812	.220-.250	CHRF-482I	SBH-1
AFHR-148-O	91211480	VDB250A	3.000-4.000	.812	.220-.250	CHRF-482O	SBH-1
AFHL-148-I	91201481	VDB250A	3.000-4.000	.812	.220-.250	CHLF-482I	SBH-1
AFHL-148-O	91201480	VDB250A	3.000-4.000	.812	.220-.250	CHLF-482O	SBH-1
AFHR-248-I	91212481	DBP45/VDB250B	4.000-6.000	.812	.250-.312	CHRF-482I	SBH-1
AFHR-248-O	91212480	DBP45/VDB250B	4.000-6.000	.812	.250-.312	CHRF-482O	SBH-1
AFHL-248-I	91202481	DBP45/VDB250B	4.000-6.000	.812	.250-.312	CHLF-482I	SBH-1
AFHL-248-O	91202480	DBP45/VDB250B	4.000-6.000	.812	.250-.312	CHLF-482O	SBH-1
AFHR-268-I	91212681	DBP65/VDB375	6.000-12.000	.812	.350-.375	CHRF-582I	SBH-1
AFHR-268-O	91212680	DBP65/VDB375	6.000-12.000	.812	.350-.375	CHRF-582O	SBH-1
AFHL-268-I	91202681	DBP65/VDB375	6.000-12.000	.812	.350-.375	CHLF-582I	SBH-1
AFHL-268-O	91202680	DBP65/VDB375	6.000-12.000	.812	.350-.375	CHLF-582O	SBH-1




Guidelines for Face Grooving Operations

EXTERNAL


STANDARD FLF/FLFD INSERTS

insert type	maximum groove depth "B"	minimum groove diameter "C"
FLF-3	.060	.940
FLF-3	.090	1.200
FLF-3	.125	1.420
FLF-3	.150	1.625
FLFD-3	.250	1.875
FLF-4/6	.060	.940
FLF-4/6	.090	1.200
FLF-4/6	.125	1.420
FLF-4/6	.150	1.625
FLF-4/6	.188	1.875
FLF-4/6	.250	2.250
FLFD-4	.375	2.250
FLFD-4	.500	2.250

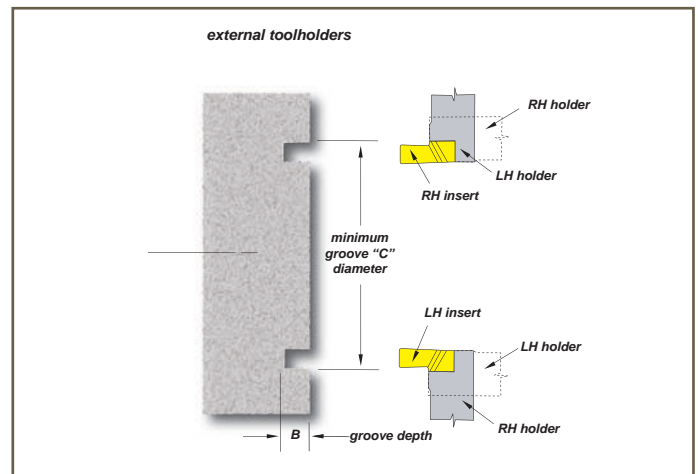


STANDARD FLG/FLGD INSERTS

insert type	maximum groove depth "B"	minimum groove diameter "C"
FLG-2	.060	2.125
FLG-2	.094	3.500
FLG-3	.094	4.000
FLG-3	.125	5.000
FLG-3	.150	5.500
FLGD-3	.250	6.875
FLG-4	.150	6.000
FLG-4	.250	8.250
FLGD-4	.375	8.750
FLGD-4	.500	8.750
FLG-5	.375	13.000

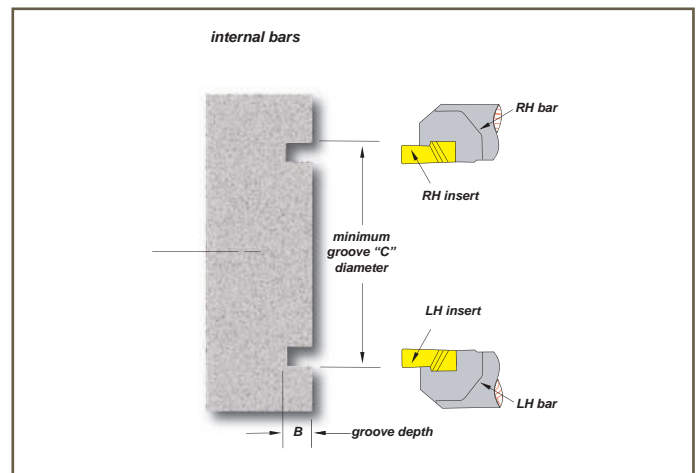


INTERNAL

insert type	maximum groove depth "D"	minimum groove diameter "E"
FLFD-3-R	.250	2.250 Also check minimum bore diameter of boring bar.

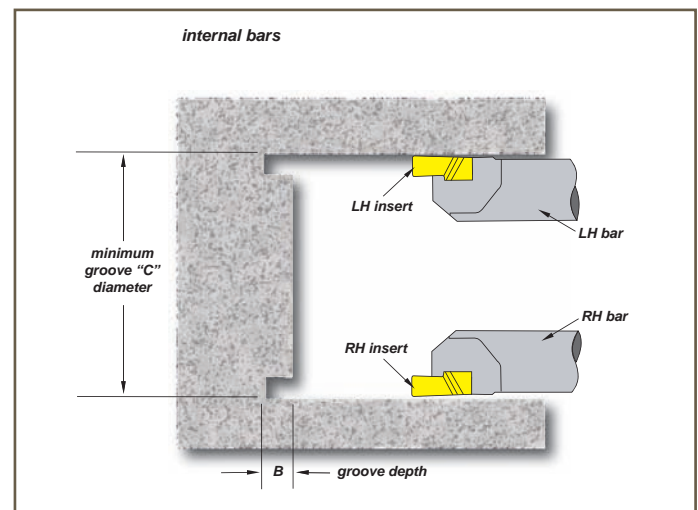



TOOL-FLO

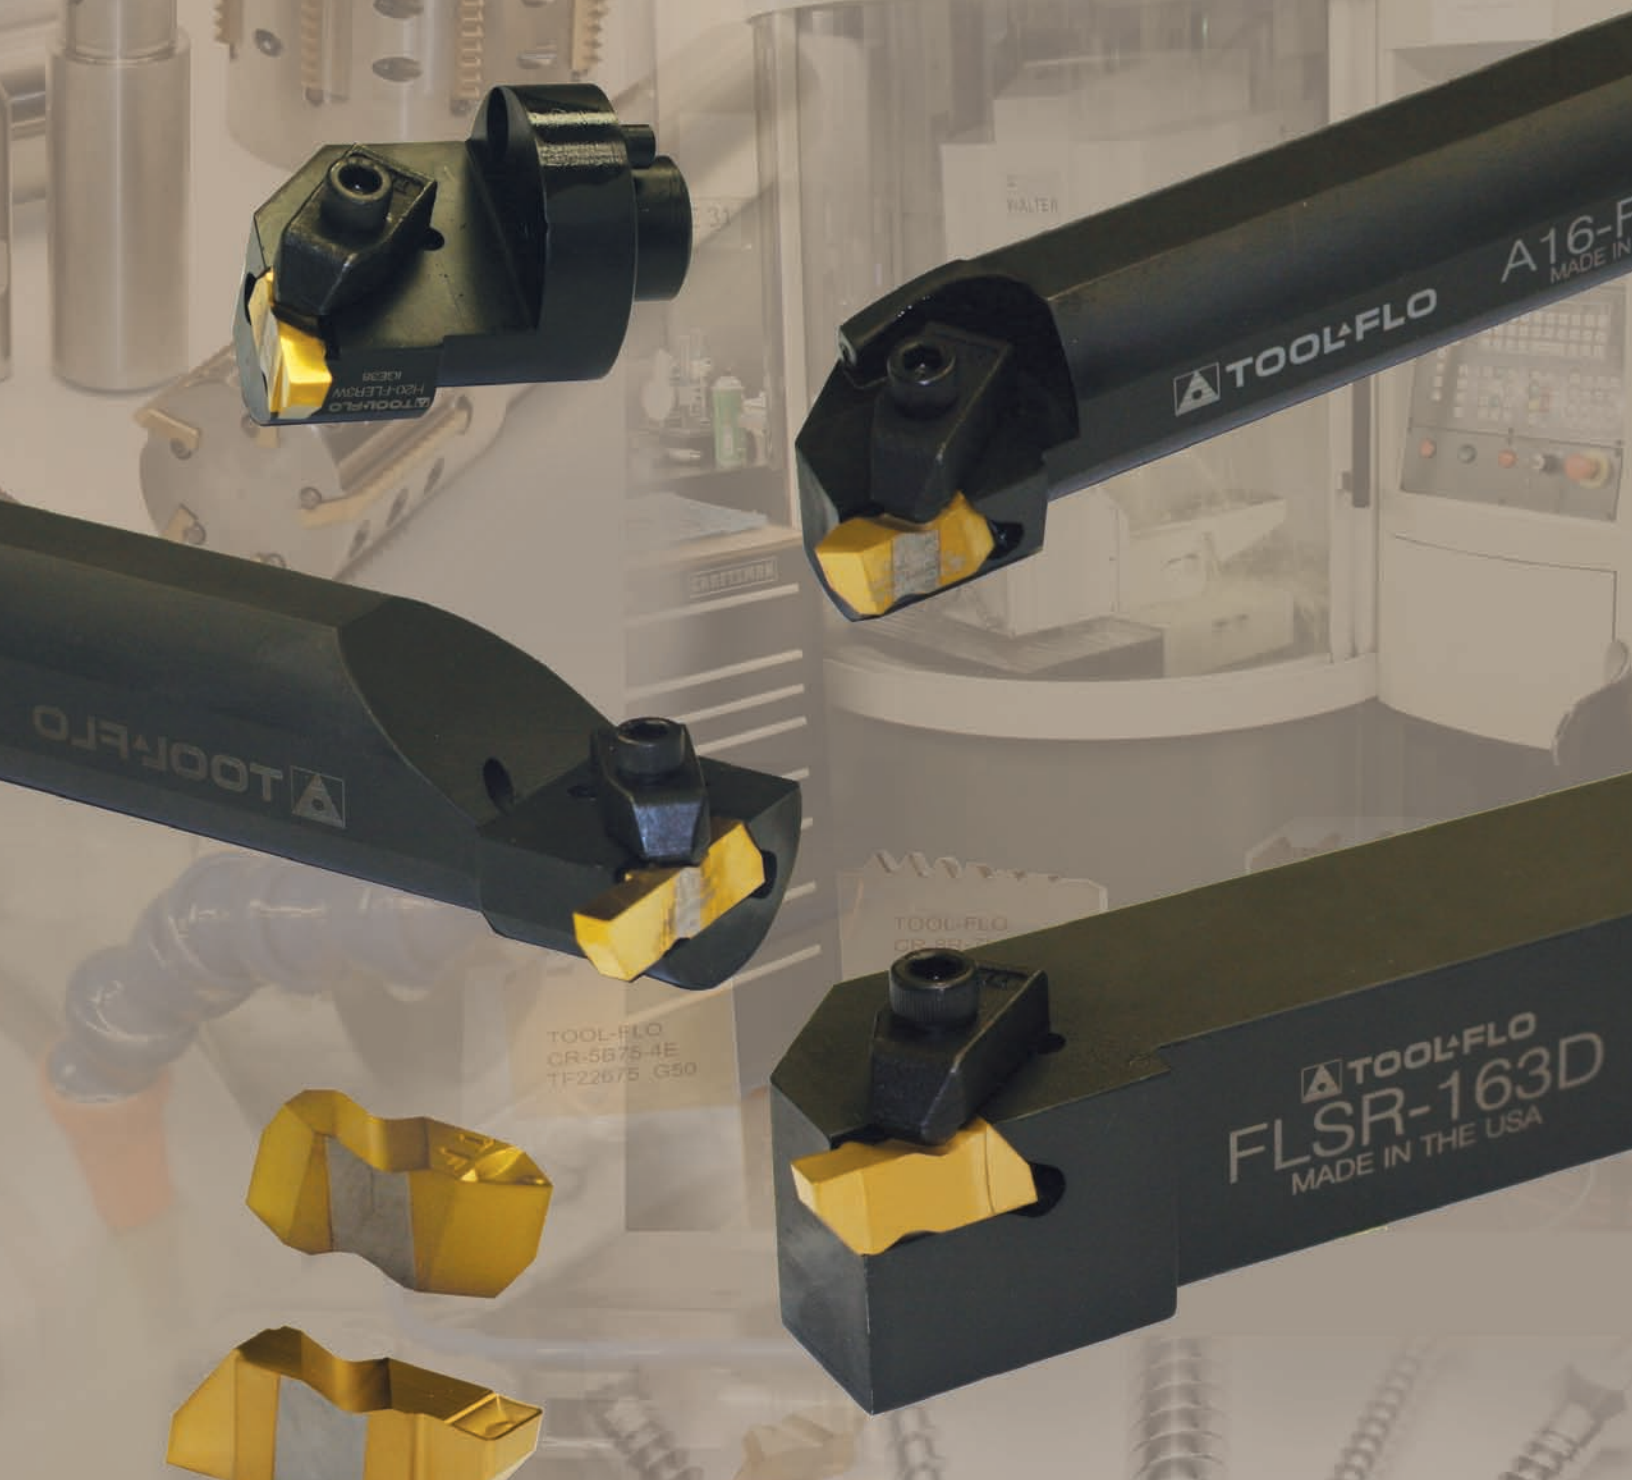


FLO-LOCK

Threading & Grooving



Flo-Lock Grooving/Threading Insert Identification Chart

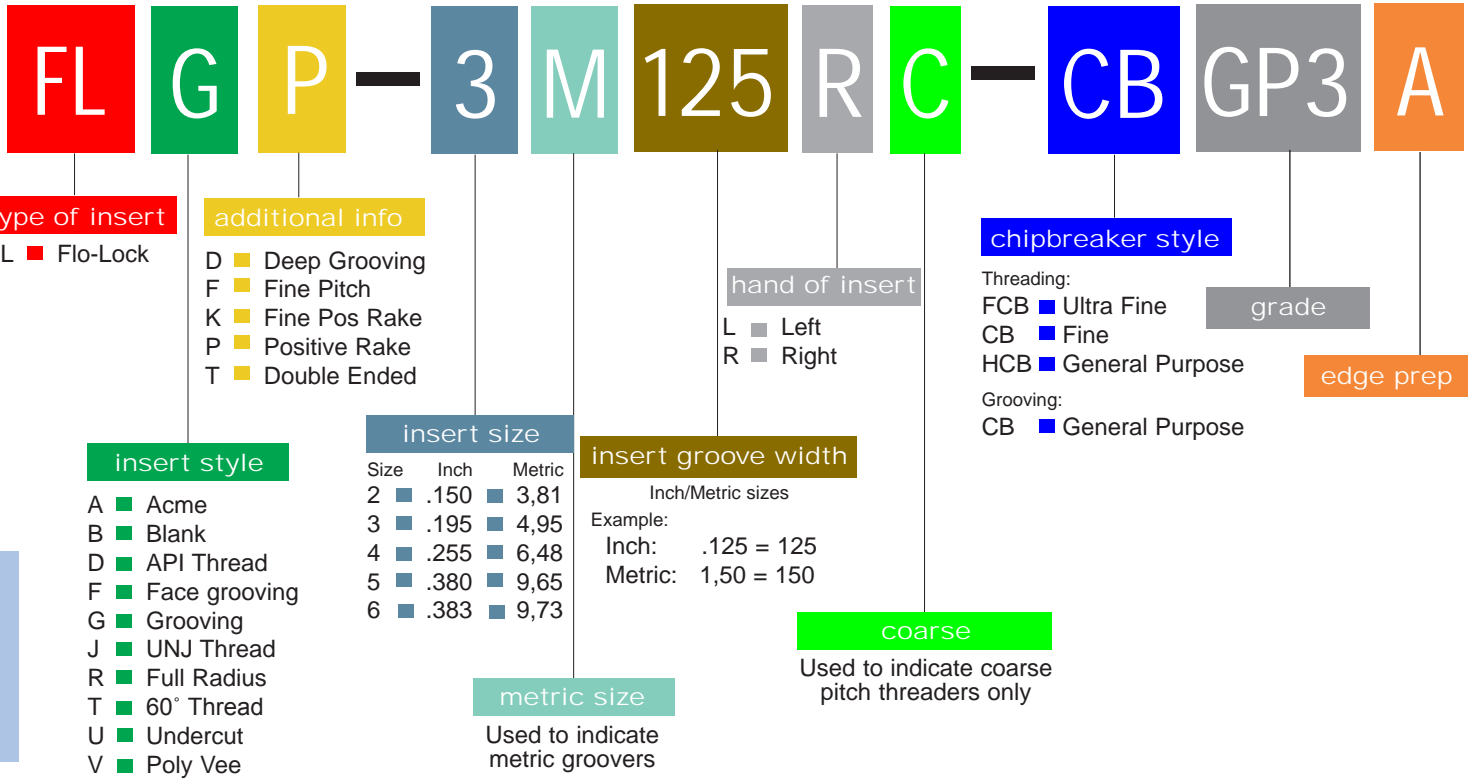

Flo-Lock Cross Reference Chart

STYLE	TOOL-FLO	KENAMETAL®	SANDVIK®	VALENITE®	HORIZON®	RTW®
ACME	FLA	NA	TLA	VLA	HA	PA
ACME STUBFLAS	NAS	TLAS	VLAS	HAS	PAS	
API-NON TOPPING	FLD	ND	TLD	#	#	#
API-TOPPING	FLDC	NDC	TLDC	#	HDC	PDC
DEEP GROOVING	FLGD	NGD	#	#	HGD	#
FACE GROOVING	FLF	NF	TLF	#	HF	#
GROOVING	FLG	NG	TLG	VLG	HG	PG
GROOVING-POSITIVE	FLGP	NGP	TLGP	VLGD	HGD	PGD
UNJ	FLJ	NJ	TLJ	#	HJ	#
UNJ-FINE PITCH	FLJF	NJF	TLJF	#	HJF	#
UNJ-FINE PITCH-POSITIVE	FLJK	NJK	TLJK	#	#	#
UNJ-POSITIVE	FLJP	NJP	TLJP	#	#	#
PROFILING - LH	FLPL	NPL	#	#	#	#
PROFILING - RH	FLPR	NPR	#	#	#	#
GROOVING - FNR	FLR	NR	TLR	VLR	HR	PR
GROOVING - FNR POS.	FLRP	NRP	TLRP	VLRD	HRP	PRP
60° V	FLT	NT	TLT	VLRT	HT	PT
AMERICAN STANDARD BUTTRESS	FLTB	NTB	TLTB	#	HTB	#
UN - UNIFIED	FLTC	NTC	TLTC	VLTC	HTC	PTC
60° V - FINE PITCH	FLTF	NTF	TLTF	VLTF	HTF	PTF
60° V - FINE PITCH POSITIVE	FLTK	NTK	TLTK	VLTK	HTK	PTK
60° V - POSITIVE	FLTP	NTP	TLTP	VLTP	HTP	PTP
POLY-V GROOVING	FLV	NV	TLV	#	HV	#

*Top Clamp change is required when converting from SANDVIK®



FLO-LOCK


GROOVING-CHIP-FLO

FLG-CB


w/patented chipbreaker *Exclusive patented design!*

Features:

- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths



RH Shown



Description	EDP Code	W		R	E		T	A	B	Gage Dia.	Coatings					
		Inch	Metric		Inch	Metric					C25	C3	GP3	GP50	AC22	AC3
FLG-2047R-CB	562647PR	.047	1,20	.002/.005	.050	1,27	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2047L-CB	562647PL	.047	1,20	.002/.005	.050	1,27	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2062R-CB	562662PR	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2062L-CB	562662PL	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2078R-CB	562678PR	.078	1,98	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2078L-CB	562678PL	.078	1,98	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2094R-CB	562694PR	.094	2,39	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2094L-CB	562694PL	.094	2,39	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2125R-CB	562825PR	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-2125L-CB	562825PL	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875	●	●	●	●	●	●
FLG-3031R-CB	563631PR	.031	0,79	.002/.005	.050	1,27	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3031L-CB	563631PL	.031	0,79	.002/.005	.050	1,27	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3047R-CB	563647PR	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3047L-CB	563647PL	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3062R-CB	563662PR	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3062L-CB	563662PL	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3072R-CB	563672PR	.072	1,83	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3072L-CB	563672PL	.072	1,83	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3078R-CB	563678PR	.078	1,98	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3078L-CB	563678PL	.078	1,98	.005/.010	.120	3,05	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3088R-CB	563688PR	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3088L-CB	563688PL	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3094R-CB	563694PR	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3094L-CB	563694PL	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3097R-CB	563697PR	.097	2,46	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3097L-CB	563697PL	.097	2,46	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3125R-CB	563825PR	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3125L-CB	563825PL	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3189R-CB	563889PR	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-3189L-CB	563889PL	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750	●	●	●	●	●	●
FLG-4125R-CB	564825PR	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●
FLG-4125L-CB	564825PL	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●
FLG-4189R-CB	564889PR	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●
FLG-4189L-CB	564889PL	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●
FLG-4250R-CB	574050PR	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●
FLG-4250L-CB	574050PL	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron				▲		●
Non-Ferrous						●
Stainless/High Temp				▲		●
Steel					▲	●

FLO-LOCK




GROOVING-CHIP-FLO

FLG-CB - METRIC

w/patented chipbreaker

Exclusive patented design!



RH Shown



Features:

- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths

FLO-LOCK

Description	EDP Code	W		R	E		T	A	B	Gage Dia.	TIN Coated		AlTiN Coated		
		Metric	Inch		GP3	GP50					AC22	AC3	AC50		
FLG-2M100R-CB	562M100PR	1,00	.039	.005/.010	1,90	.075	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M100L-CB	562M100PL	1,00	.039	.005/.010	1,90	.075	.150	.219	.270	.1875	●	●	●	●	●
FLG-2M150R-CB	562M150PR	1,50	.059	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M150L-CB	562M150PL	1,50	.059	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M170R-CB	562M170PR	1,70	.067	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M170L-CB	562M170PL	1,70	.067	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M195R-CB	562M195PR	1,95	.077	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M195L-CB	562M195PL	1,95	.077	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M200R-CB	562M200PR	2,00	.079	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M200L-CB	562M200PL	2,00	.079	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M220R-CB	562M220PR	2,20	.087	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M220L-CB	562M220PL	2,20	.087	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M225R-CB	562M225PR	2,25	.089	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M225L-CB	562M225PL	2,25	.089	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M250R-CB	562M250PR	2,50	.098	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M250L-CB	562M250PL	2,50	.098	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M300R-CB	562M300PR	3,00	.118	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M300L-CB	562M300PL	3,00	.118	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M325R-CB	562M325PR	3,25	.128	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-2M325L-CB	562M325PL	3,25	.128	.005/.010	2,79	.110	.150	.219	.2700	.1875	●	●	●	●	●
FLG-3M100R-CB	563M100PR	1,00	.039	.005/.010	1,90	.075	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M100L-CB	563M100PL	1,00	.039	.005/.010	1,90	.075	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M120R-CB	563M120PR	1,20	.047	.005/.010	1,90	.075	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M120L-CB	563M120PL	1,20	.047	.005/.010	1,90	.075	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M150R-CB	563M150PR	1,50	.059	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M150L-CB	563M150PL	1,50	.059	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M170R-CB	563M170PR	1,70	.067	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M170L-CB	563M170PL	1,70	.067	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M175R-CB	563M175PR	1,75	.069	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M175L-CB	563M175PL	1,75	.069	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M200R-CB	563M200PR	2,00	.079	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M200L-CB	563M200PL	2,00	.079	.005/.010	3,05	.120	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M220R-CB	563M220PR	2,20	.087	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M220L-CB	563M220PL	2,20	.087	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M225R-CB	563M225PR	2,25	.089	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M225L-CB	563M225PL	2,25	.089	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M250R-CB	563M250PR	2,50	.098	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M250L-CB	563M250PL	2,50	.098	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M300R-CB	563M300PR	3,00	.118	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M300L-CB	563M300PL	3,00	.118	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M320R-CB	563M320PR	3,20	.126	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M320L-CB	563M320PL	3,20	.126	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M325R-CB	563M325PR	3,25	.128	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M325L-CB	563M325PL	3,25	.128	.005/.010	4,57	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M400R-CB	563M400PR	4,00	.157	.010/.015	6,35	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-3M400L-CB	563M400PL	4,00	.157	.010/.015	6,35	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLG-4M320R-CB	564M320PR	3,20	.126	.020/.025	6,35	.250	.255	.453	.6360	.3750	●	●	●	●	●
FLG-4M320L-CB	564M320PL	3,20	.126	.020/.025	6,35	.250	.255	.453	.6360	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	▲	●
Non-Ferrous	▲	●
Stainless/High Temp	▲	●
Steel	▲	●



FLO-LOCK

GROOVING FLG



RH Shown

Description	EDP Code	W		R	E		T	A	B	Gage Dia.	Coating									
		Inch	Metric		Inch	Metric					Uncoated	TIN Coated	AlTiN Coated	C25	C3	GP3	GP50	AC22	AC3	AC50
FLG-2031R	562631R	.031	0,79	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2031L	562631L	.031	0,79	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2041R	562641R	.041	1,04	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2041L	562641L	.041	1,04	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2047R	562647R	.047	1,19	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2047L	562647L	.047	1,19	.002/.005	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2058R	562658R	.058	1,47	.005/.010	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2058L	562658L	.058	1,47	.005/.010	.050	1,27	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2062R	562662R	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2062L	562662L	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2094R	562694R	.094	2,39	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2094L	562694L	.094	2,39	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2125R	562825R	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-2125L	562825L	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875		●	●	●	●	●	●	●	●	●
FLG-3031R	563631R	.031	0,79	.002/.005	.050	1,27	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3031L	563631L	.031	0,79	.002/.005	.050	1,27	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3047R	563647R	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3047L	563647L	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3062R	563662R	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3062L	563662L	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3072R	563672R	.072	1,83	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3072L	563672L	.072	1,83	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3078R	563678R	.078	1,98	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3078L	563678L	.078	1,98	.005/.010	.120	3,05	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3088R	563688R	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3088L	563688L	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3094R	563694R	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3094L	563694L	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3097R	563697R	.097	2,46	.010/.015	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3097L	563697L	.097	2,46	.010/.015	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3105R	563805R	.105	2,67	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3105L	563805L	.105	2,67	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3110R	563810R	.110	2,79	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3110L	563810L	.110	2,79	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3122R	563822R	.122	3,10	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3122L	563822L	.122	3,10	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3125R	563825R	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3125L	563825L	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3142R	563842R	.142	3,61	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3142L	563842L	.142	3,61	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3156R	563856R	.156	3,96	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3156L	563856L	.156	3,96	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3178R	563878R	.178	4,52	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3178L	563878L	.178	4,52	.005/.010	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3185R	563885R	.185	4,70	.020/.025	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3185L	563885L	.185	4,70	.020/.025	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3189R	563889R	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3189L	563889L	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3250R	573050R	.250	6,35	.020/.025	.180	4,57	.250	.344	.4050	.3750		●	●	●	●	●	●	●	●	●
FLG-3250L	573050L	.250	6,35	.020/.025	.180	4,57	.250	.344	.4050	.3750		●	●	●	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C25	C3	GP3	GP50	AC22	AC3	AC50
Cast Iron			▲				●
Non-Ferrous			▲				●
Stainless/High Temp			▲				●
Steel					▲		●

FLO-LOCK



GROOVING FLG



RH Shown




Description	EDP Code	W		R	E		T	A	B	Gage Dia.	Coating							
		Inch	Metric		Inch	Metric					C3	GP3	GP5	GP50	AC3	AC50		
FLG-4125R	564825R	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLG-4125L	564825L	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLG-4189R	564889R	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4189L	564889L	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4213R	574013R	.213	5,41	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLG-4213L	574013L	.213	5,41	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLG-4219R	574019R	.219	5,56	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4219L	574019L	.219	5,56	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4250R	574050R	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4250L	574050L	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLG-4312R	574212R	.312	7,92	.030/.035	.250	6,35	.312	.453	.6360	.3750								
FLG-4312L	574212L	.312	7,92	.030/.035	.250	6,35	.312	.453	.6360	.3750								
FLG-5250R	575050R	.250	6,35	.020/.025	.375	9,53	.380	.688	.9520	.5000								
FLG-5250L	575050L	.250	6,35	.020/.025	.375	9,53	.380	.688	.9520	.5000								
FLG-5281R	575081R	.281	7,14	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5281L	575081L	.281	7,14	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5312R	575212R	.312	7,92	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5312L	575212L	.312	7,92	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5344R	575244R	.344	8,74	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5344L	575244L	.344	8,74	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5375R	575275R	.375	9,53	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-5375L	575275L	.375	9,53	.030/.035	.375	9,53	.380	.688	.9520	.5000								
FLG-6281R	576081R	.281	7,14	.030/.035	.250	6,35	.383	.453	.6360	.3750								
FLG-6281L	576081L	.281	7,14	.030/.035	.250	6,35	.383	.453	.6360	.3750								
FLG-6312R	576212R	.312	7,92	.030/.035	.250	6,35	.383	.453	.6360	.3750								
FLG-6312L	576212L	.312	7,92	.030/.035	.250	6,35	.383	.453	.6360	.3750								
FLG-6375R	576275R	.375	9,53	.030/.035	.250	6,35	.383	.453	.6360	.3750								
FLG-6375L	576275L	.375	9,53	.030/.035	.250	6,35	.383	.453	.6360	.3750								

FLO-LOCK

GROOVING FLGP

w/positive rake



RH Shown



Description	EDP Code	W		R	E		T	A	B	Gage Dia.	Coating							
		Inch	Metric		Inch	Metric					C3	GP3	GP50	AC3	AC50	GP16		
FLGP-2031R	572431R	.031	0,79	.002/.005	.050	1,27	.150	.219	.2700	.1875								
FLGP-2031L	572431L	.031	0,79	.002/.005	.050	1,27	.150	.219	.2700	.1875								
FLGP-2062R	572462R	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875								
FLGP-2062L	572462L	.062	1,57	.005/.010	.110	2,79	.150	.219	.2700	.1875								
FLGP-2125R	572625R	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875								
FLGP-2125L	572625L	.125	3,18	.005/.010	.110	2,79	.150	.219	.2700	.1875								
FLGP-3047R	573447R	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750								
FLGP-3047L	573447L	.047	1,19	.005/.010	.075	1,90	.195	.344	.4050	.3750								
FLGP-3062R	573462R	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750								
FLGP-3062L	573462L	.062	1,57	.005/.010	.120	3,05	.195	.344	.4050	.3750								
FLGP-3088R	573488R	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3088L	573488L	.088	2,24	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3094R	573494R	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3094L	573494L	.094	2,39	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3125R	573625R	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3125L	573625L	.125	3,18	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3156R	573656R	.156	3,96	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3156L	573656L	.156	3,96	.005/.010	.180	4,57	.195	.344	.4050	.3750								
FLGP-3189R	573689R	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750								
FLGP-3189L	573689L	.189	4,80	.020/.025	.180	4,57	.195	.344	.4050	.3750								
FLGP-4125R	574625R	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLGP-4125L	574625L	.125	3,18	.005/.010	.250	6,35	.255	.453	.6360	.3750								
FLGP-4189R	574689R	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLGP-4189L	574689L	.189	4,80	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLGP-4250R	574850R	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750								
FLGP-4250L	574850L	.250	6,35	.020/.025	.250	6,35	.255	.453	.6360	.3750								

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	GP3	GP50	AC3	AC50	GP16
Cast Iron	▲				●	
Non-Ferrous	▲				●	
Stainless/High Temp					●	
Steel	▲	▲			●	



FLO-LOCK


GROOVING - CHIP-FLO FLR-CB

w/full nose radius

Features:

- Patented chipbreaker
Patent No. 6,146,064
- Maximum chip control
- Industry standard widths

Exclusive patented design!




RH Shown



Description	EDP Code	W		R		E		T	A	B	Gage Dia.	Coatings				
		Inch	Metric	Inch	Metric	Inch	Metric					C3	GP3	GP50	AC3	AC50
		●	●	●	●	●	●					●	●	●	●	●
FLR-3031R-CB	593031PR	.062	1,57	.031	0,78	.125	3,18	.195	.344	.4033	.3750	●	●	●	●	●
FLR-3031L-CB	593031PL	.062	1,57	.031	0,78	.125	3,18	.195	.344	.4033	.3750	●	●	●	●	●
FLR-3047R-CB	593047PR	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLR-3047L-CB	593047PL	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLR-3062R-CB	593062PR	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●
FLR-3062L-CB	593062PL	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●

GROOVING FLR

w/full nose radius




RH Shown




Description	EDP Code	W		R		E		T	A	B	Gage Dia.	Coatings				
		Inch	Metric	Inch	Metric	Inch	Metric					C3	GP3	GP50	AC3	AC50
		●	●	●	●	●	●					●	●	●	●	●
FLR-2031R	592031R	.062	1,57	.031	0,78	.110	2,79	.150	.219	.2683	.1875	●	●	●	●	●
FLR-2031L	592031L	.062	1,57	.031	0,78	.110	2,79	.150	.219	.2683	.1875	●	●	●	●	●
FLR-2047R	592047R	.094	2,39	.047	1,19	.110	2,79	.150	.219	.2675	.1875	●	●	●	●	●
FLR-2047L	592047L	.094	2,39	.047	1,19	.110	2,79	.150	.219	.2675	.1875	●	●	●	●	●
FLR-2062R	592062R	.125	3,18	.062	1,57	.110	2,79	.150	.219	.2667	.1875	●	●	●	●	●
FLR-2062L	592062L	.125	3,18	.062	1,57	.110	2,79	.150	.219	.2667	.1875	●	●	●	●	●
FLR-3031R	593031R	.062	1,57	.031	0,78	.125	3,18	.195	.344	.4033	.3750	●	●	●	●	●
FLR-3031L	593031L	.062	1,57	.031	0,78	.125	3,18	.195	.344	.4033	.3750	●	●	●	●	●
FLR-3047R	593047R	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLR-3047L	593047L	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLR-3062R	593062R	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●
FLR-3062L	593062L	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●
FLR-3078R	593078R	.156	3,96	.078	1,98	.180	4,57	.195	.344	.4008	.3750	●	●	●	●	●
FLR-3078L	593078L	.156	3,96	.078	1,98	.180	4,57	.195	.344	.4008	.3750	●	●	●	●	●
FLR-3094R	593094R	.189	4,80	.094	2,39	.180	4,57	.195	.344	.4000	.3750	●	●	●	●	●
FLR-3094L	593094L	.189	4,80	.094	2,39	.180	4,57	.195	.344	.4000	.3750	●	●	●	●	●
FLR-4062R	594062R	.125	3,18	.062	1,57	.250	6,35	.255	.453	.6327	.3750	●	●	●	●	●
FLR-4062L	594062L	.125	3,18	.062	1,57	.250	6,35	.255	.453	.6327	.3750	●	●	●	●	●
FLR-4094R	594094R	.189	4,80	.094	2,39	.250	6,35	.255	.453	.6310	.3750	●	●	●	●	●
FLR-4094L	594094L	.189	4,80	.094	2,39	.250	6,35	.255	.453	.6310	.3750	●	●	●	●	●
FLR-4125R	594225R	.250	6,35	.125	3,18	.250	6,35	.255	.453	.6293	.3750	●	●	●	●	●
FLR-4125L	594225L	.250	6,35	.125	3,18	.250	6,35	.255	.453	.6293	.3750	●	●	●	●	●

GROOVING FLRP

w/full nose radius and positive rake



RH Shown



Description	EDP Code	W		R		E		T	A	B	Gage Dia.	Coatings				
		Inch	Metric	Inch	Metric	Inch	Metric					C3	GP3	GP50	AC3	AC50
		●	●	●	●	●	●					●	●	●	●	●
FLRP-3031R	593831R	.062	1,57	.031	0,78	.125	0,79	.195	.344	.4033	.3750	●	●	●	●	●
FLRP-3031L	593831L	.062	1,57	.031	0,78	.125	0,79	.195	.344	.4033	.3750	●	●	●	●	●
FLRP-3047R	593847R	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLRP-3047L	593847L	.094	2,39	.047	1,19	.180	4,57	.195	.344	.4025	.3750	●	●	●	●	●
FLRP-3062R	593862R	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●
FLRP-3062L	593862L	.125	3,18	.062	1,57	.180	4,57	.195	.344	.4017	.3750	●	●	●	●	●
FLRP-3078R	593878R	.156	3,96	.078	1,98	.180	4,57	.195	.344	.4008	.3750	●	●	●	●	●
FLRP-3078L	593878L	.156	3,96	.078	1,98	.180	4,57	.195	.344	.4008	.3750	●	●	●	●	●
FLRP-3094R	593894R	.189	4,80	.094	2,39	.180	4,57	.195	.344	.4000	.3750	●	●	●	●	●
FLRP-3094L	593894L	.189	4,80	.094	2,39	.180	4,57	.195	.344	.4000	.3750	●	●	●	●	●
FLRP-4062R	594862R	.125	3,18	.062	1,57	.250	6,35	.255	.453	.6327	.3750	●	●	●	●	●
FLRP-4062L	594862L	.125	3,18	.062	1,57	.250	6,35	.255	.453	.6327	.3750	●	●	●	●	●
FLRP-4094R	594894R	.189	4,80	.094	2,39	.250	6,35	.255	.453	.6310	.3750	●	●	●	●	●
FLRP-4094L	594894L	.189	4,80	.094	2,39	.250	6,35	.255	.453	.6310	.3750	●	●	●	●	●
FLRP-4125R	604025R	.250	6,35	.125	3,18	.250	6,35	.255	.453	.6293	.3750	●	●	●	●	●
FLRP-4125L	604025L	.250	6,35	.125	3,18	.250	6,35	.255	.453	.6293	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

- Cast Iron
- Non-Ferrous
- Stainless/High Temp
- Steel




FACE GROOVING - CHIP-FLO

FLF-CB

Exclusive patented design!

Features:


- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths

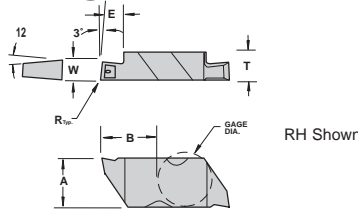

Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLF-3125R-CB	563025PR	.125	3,18	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3125L-CB	563025PL	.125	3,18	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3156R-CB	563056PR	.156	3,96	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3156L-CB	563056PL	.156	3,96	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3188R-CB	563088PR	.188	4,77	.020/.025	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3188L-CB	563088PL	.188	4,77	.020/.025	.180	.195	.344	.4050	.3750	●	●	●	●	●

FACE GROOVING

FLF

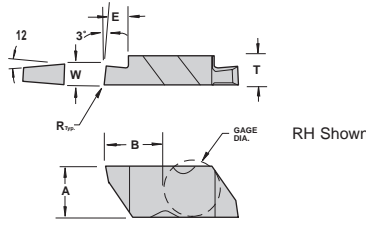

Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLF-3125R	563025R	.125	3,18	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3125L	563025L	.125	3,18	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3156R	563056R	.156	3,96	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3156L	563025L	.156	3,96	.005/.010	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3188R	563088R	.188	4,77	.020/.025	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-3188L	563088L	.188	4,77	.020/.025	.180	.195	.344	.4050	.3750	●	●	●	●	●
FLF-4250R	564250R	.250	6,35	.020/.025	.250	.255	.453	.6360	.3750	●	●	●	●	●
FLF-4250L	564250L	.250	6,35	.020/.025	.250	.255	.453	.6360	.3750	●	●	●	●	●
FLF-6218R	566218R	.218	5,54	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●
FLF-6218L	566218L	.218	5,54	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●
FLF-6250R	566250R	.250	6,35	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●
FLF-6250L	566250L	.250	6,35	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●
FLF-6375R	566475R	.375	9,53	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●
FLF-6375L	566475L	.375	9,53	.030/.035	.383	.250	.453	.6360	.3750	●	●	●	●	●

DEEP GROOVING - CHIP-FLO



FLGD-CB

Single ended

Exclusive patented design!

Features:

- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLGD-3062R-CB (FLG-3062R-CB)	563662PR	.062	1,57	.005/.010	.120	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3062L-CB (FLG-3062L-CB)	563662PL	.062	1,57	.005/.010	.120	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3094R-CB	6335094PR	.094	2,39	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3094L-CB	6335094PL	.094	2,39	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3125R-CB	6335125PR	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3125L-CB	6335125PL	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3189R-CB	6335189PR	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3189L-CB	6335189PL	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-4189R-CB	6345189PR	.189	4,80	.020/.025	.375	.255	.453	.7610	.3750	●	●	●	●	●
FLGD-4189L-CB	6345189PL	.189	4,80	.020/.025	.375	.255	.453	.7610	.3750	●	●	●	●	●
FLGD-4250R-CB	6345250PR	.250	6,35	.020/.025	.500	.255	.453	.8860	.3750	●	●	●	●	●
FLGD-4250L-CB	6345250PL	.250	6,35	.020/.025	.500	.255	.453	.8860	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

	Uncoated	TIN Coated	AlTiN Coated
Cast Iron	▲	●	●
Non-Ferrous	▲	●	●
Stainless/High Temp	▲	●	●
Steel	▲	●	●




FLO-LOCK


DEEP GROOVING

FLGD

Single ended

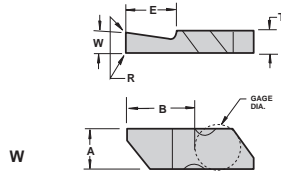

RH Shown




Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLGD-3062R (FLG-3062R)	563662R	.062	1,57	.005/.010	.120	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3062L (FLG-3062L)	563662L	.062	1,57	.005/.010	.120	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3094R	6334094R	.094	2,39	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3094L	6334094L	.094	2,39	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3125R	6334125R	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3125L	6334125L	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3189R	6334189R	.189	4,8	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-3189L	6334189L	.189	4,8	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLGD-4125R*	6344125R	.125	3,18	.005/.010	.290	.255	.453	.6360	.3750	●	●	●	●	●
FLGD-4125L*	6344125L	.125	3,18	.005/.010	.290	.255	.453	.6360	.3750	●	●	●	●	●
FLGD-4189R	6344189R	.189	4,8	.020/.025	.375	.255	.453	.7610	.3750	●	●	●	●	●
FLGD-4189L	6344189L	.189	4,8	.020/.025	.375	.255	.453	.7610	.3750	●	●	●	●	●
FLGD-4250R	6344250R	.250	6,35	.020/.025	.500	.255	.453	.8860	.3750	●	●	●	●	●
FLGD-4250L	6344250L	.250	6,35	.020/.025	.500	.255	.453	.8860	.3750	●	●	●	●	●

*Inserts are double ended.


DEEP GROOVING - FNR

FLRD

Full nose radius - Single ended



RH Shown



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLRD-3031R (FLR-3062R)	593062R	.062	1,57	.031	.125	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-3031L (FLR-3062L)	593062L	.062	1,57	.031	.125	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-3062R	6336062R	.125	3,19	.062	.250	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-3062L	6336062L	.125	3,19	.062	.250	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-3094R	6336094R	.189	4,8	.094	.250	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-3094L	6336094L	.189	4,8	.094	.250	.195	.344	.5016	.3750	●	●	●	●	●
FLRD-4094R	6346094R	.189	4,8	.094	.500	.255	.453	.8860	.3750	●	●	●	●	●
FLRD-4094L	6346094L	.189	4,8	.094	.500	.255	.453	.8860	.3750	●	●	●	●	●
FLRD-4125R	6346125R	.250	6,35	.125	.500	.255	.453	.8860	.3750	●	●	●	●	●
FLRD-4125L	6346125L	.250	6,35	.125	.500	.255	.453	.8860	.3750	●	●	●	●	●


INTERNAL DEEP FACE GROOVING - CHIP-FLO

FLFD-I-CB


Single ended

Features:

- Patented chipbreaker
Patent No. 6,146,064
- Maximum chip control
- Industry standard widths



RH Shown



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLFD-3125R-I-CB	6338125PRI	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3125L-I-CB	6338125PLI	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3189R-I-CB	6338189PRI	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3189L-I-CB	6338189PLI	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●


DEEP FACE GROOVING CHIP-FLO

FLFD-CB


Single ended

Features:

- Patented chipbreaker
Patent No. 6,146,064
- Maximum chip control
- Industry standard widths



RH Shown



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLFD-3125R-CB	6338125PR	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3125L-CB	6338125PL	.125	3,18	.005/.010	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3189R-CB	6338189PR	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●
FLFD-3189L-CB	6338189PL	.189	4,80	.020/.025	.250	.195	.344	.5050	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
▲	●	●	●
▲	●	●	●
▲	●	●	●
▲	●	●	●





DEEP GROOVING

FLGT

Double ended

Exclusive 2 edge design!



RH Shown



Gage	Coating				
	Uncoated	TIN Coated	GP50	AC3	AITIN Coated
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

■ Fits FLSLT/RT Holders. See page 110



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLGT-3094R	6332094R	.094	2,39	.005/.010	.275	.195	.344	.855	.3750	●	●	●	●	●
FLGT-3094L	6332094L	.094	2,39	.005/.010	.275	.195	.344	.855	.3750	●	●	●	●	●
FLGT-3125R	6332125R	.125	3,18	.005/.010	.437	.195	.344	.855	.3750	●	●	●	●	●
FLGT-3125L	6332125L	.125	3,18	.005/.010	.437	.195	.344	.855	.3750	●	●	●	●	●
FLGT-3189R	6332189R	.189	4,8	.020/.025	.437	.195	.344	.855	.3750	●	●	●	●	●
FLGT-3189L	6332189L	.189	4,8	.020/.025	.437	.195	.344	.855	.3750	●	●	●	●	●
FLGT-4125R	6342125R	.125	3,18	.005/.010	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLGT-4125L	6342125L	.125	3,18	.005/.010	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLGT-4189R	6342189R	.189	4,8	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLGT-4189L	6342189L	.189	4,8	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLGT-4250R	6342250R	.250	6,35	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLGT-4250L	6342250L	.250	6,35	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●

DEEP FACE GROOVING

FLFT

Double ended

Exclusive 2 edge design!



RH Shown



Gage	Coating				
	Uncoated	TIN Coated	GP50	AC3	AITIN Coated
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

■ Fits FLSLT/RT Holders. See page 110



Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLFT-3125R	6339125R	.125	3,18	.005/.010	.375	.195	.344	.885	.3750	●	●	●	●	●
FLFT-3125L	6339125L	.125	3,18	.005/.010	.375	.195	.344	.885	.3750	●	●	●	●	●
FLFT-4189R	6349189R	.189	4,8	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLFT-4189L	6349189L	.189	4,8	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLFT-4250R	6349250R	.250	6,35	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLFT-4250L	6349250L	.250	6,35	.020/.025	.550	.255	.453	1.136	.3750	●	●	●	●	●

DEEP GROOVING - FNR

FLRT

Double ended

Exclusive 2 edge design!



RH Shown



Gage	Coating				
	Uncoated	TIN Coated	GP50	AC3	AITIN Coated
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

■ Fits FLSLT/RT Holders. See page 110

Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLRT-3062R	6337062R	.125	3,18	.062	.437	.195	.344	.855	.3750	●	●	●	●	●
FLRT-3062L	6337062L	.125	3,18	.062	.437	.195	.344	.855	.3750	●	●	●	●	●
FLRT-3094R	6337094R	.189	4,80	.094	.437	.195	.344	.855	.3750	●	●	●	●	●
FLRT-3094L	6337094L	.189	4,80	.094	.437	.195	.344	.855	.3750	●	●	●	●	●
FLRT-4062R	6347062R	.125	3,18	.062	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLRT-4062L	6347062L	.125	3,18	.062	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLRT-4094R	6347094R	.189	4,8	.094	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLRT-4094L	6347094L	.189	4,8	.094	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLRT-4125R	6347125R	.250	6,35	.125	.550	.255	.453	1.136	.3750	●	●	●	●	●
FLRT-4125L	6347125L	.250	6,35	.125	.550	.255	.453	1.136	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	GP3	GP50	AC3	AC50
Cast Iron			▲		●
Non-Ferrous			▲		●
Stainless/High Temp			▲		●
Steel			▲		●



FLO-LOCK

Recommended Feed rate - inch/rev (mm/rev)

Workpiece Group	Insert Rake Configuration	
	FLG-Neutral	FLG-CB
Free Machining Carbon Steels	.004-.010	.005-.014
Plain Carbon Steels	.004-.010	.005-.014
Alloy Steels 190-330 HB	.004-.010	.005-.014
Alloy Steels 330-450 HB	.003-.009	.005-.012
Martensitic/Ferritic Stainless Steel 400 Series	.004-.010	.005-.014
Austenitic Stainless 300 Series	.003-.006	.004-.008
Gray Cast Iron 190-330 HB	.004-.010	---
Gray Cast Iron 330-450 HB	.003-.009	---
Alloy / Ductile Irons	.004-.010	.005-.014
Free Machining Aluminum Alloys	.005-.012	.006-.016
High-Silicon Aluminum Alloys	.003-.006	---
Copper / Zinc / Brass	.005-.012	.006-.016
Non-Metallics	.005-.012	---
High Temperature Alloys 200-260 HB	.003-.006	.004-.007
High Temperature Alloys 260-450 HB	.003-.006	.004-.007
Titanium Alloys (Ti 6Al-4V)	.003-.006	.004-.008
Hardened Materials 48-65 HRC	.0015-.005	---

Flo-Lock Series Kits



THREADING KITS

V-THREADING KIT #1A	V-THREADING KIT #1B
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLT-3R-HCB GP50	4 FLT-3R-HCB GP3
1 S-412 SCREW	1 S-412 SCREW

GROOVING KITS

W.125 GROOVING KIT #2A	W.125 GROOVING KIT #2B
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLG-3125R-CB GP50	4 FLG-3125R-CB GP3
1 S-412 SCREW	1 S-412 SCREW

W.094 GROOVING KIT #3A	W.094 GROOVING KIT #3B
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLG-3094R-CB GP50	4 FLG-3094R-CB GP3
1 S-412 SCREW	1 S-412 SCREW

W.062 GROOVING KIT #4A	W.062 GROOVING KIT #4B
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLG-3062R-CB GP50	4 FLG-3062R-CB GP3
1 S-412 SCREW	1 S-412 SCREW

W.047 GROOVING KIT #5A	W.047 GROOVING KIT #5B
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLG-3047R-CB GP50	4 FLG-3047R-CB GP3
1 S-412 SCREW	1 S-412 SCREW

DEEP GROOVING KITS

W.125 GROOVING KIT #6	W.094 GROOVING KIT #7
Kit Contents	Kit Contents
1 FLSR-163D	1 FLSR-163D
4 FLGD-3125R-CB AC3	4 FLGD-3094R-CB AC3
1 S-412 SCREW	1 S-412 SCREW



FLO-LOCK

Recommended SFM for Grooving Applications


Workpiece Group	Uncoated	TiN PVD Coated				AlTiN PVD Coated			TiN Cermet	CBN		PCD
	C3	GP22	GP3	GP4	GP50	AC22	AC3	AC50	GP6	CB200	CB400	PC33
Free Machining Carbon Steels	---	150-300	200-400	60-175	200-600	200-400	250-450	400-800	600-1500	---	---	---
Plain Carbon Steels	---	150-300	200-400	60-175	200-600	200-400	250-450	450-800	600-1200	---	---	---
Alloy Steels 190-330 HB	---	150-300	200-400	60-150	200-500	200-350	250-400	400-800	500-1100	---	---	---
Alloy Steels 330-450 HB	---	150-300	200-350	60-150	200-450	200-350	250-400	400-750	600-800	---	---	---
Martensitic/Ferritic Stainless Steel 400 Series	---	150-300	200-400	60-150	200-500	200-400	250-450	350-700	500-800	---	---	---
Austenitic Stainless 300 Series	200-400	150-400	200-500	60-150	---	300-600	250-700	---	500-1000	---	---	---
Gray Cast Iron 190-330 HB	100-375	150-400	200-600	60-150	---	300-600	250-700	---	400-1100	1400-2500	---	---
Gray Cast Iron 330-450 HB	100-350	150-350	200-500	60-150	---	200-550	250-600	---	350-950	1200-1800	---	---
Alloy / Ductile Irons	100-350	150-300	200-400	60-150	200-500	250-450	200-450	300-700	350-950	---	---	---
Free Machining Aluminum Alloys	500-2000	150-2000	300-2000	60-150	---	600-2200	600-2500	---	---	---	---	1000-8000
High-Silicon Aluminum Alloys	---	---	---	---	---	---	---	---	---	---	---	1000-5000
Copper / Zinc / Brass	200-700	150-700	200-900	---	---	300-900	400-1000	---	---	---	---	1000-4000
Non-Metallics	400-1400	150-1500	300-1500	---	---	350-1200	400-1500	---	---	---	---	1000-4500
High Temperature Alloys 200-260 HB	80-130	100-175	100-200	50-80	---	80-200	100-250	---	---	300-600	---	---
High Temperature Alloys 260-450 HB	50-100	80-150	100-175	50-80	---	80-175	100-200	---	---	250-450	---	---
Titanium Alloys (Ti 6Al-4V)	100-200	100-250	150-300	50-80	---	80-300	100-300	---	---	---	---	---
Hardened Materials 48-65 HRC	---	---	---	---	---	---	80-150	---	---	150-350	200-550	---

Bold print items denote the top choices for the materials listed, provided it can be machined within the SFM stated under the appropriate machining conditions. For the best performance in optimal machining conditions, select the grade that will provide you with the highest allowable SFM.




ACME THREADING FLA

For Flo-Lock acme thread limits see pg. 111,112.




RH Shown



Description	EDP Code	TPI	W	T	E	A	B	Gage Dia.	Gage					
									C3	GP3	GP50	AC3	AC50	
FLA-3R16	553016R	16	.0206	.195	.149	.344	.4026	.3750						
FLA-3L16	553016L	16	.0206	.195	.149	.344	.4026	.3750						
FLA-3R14	553014R	14	.0239	.195	.149	.344	.4026	.3750						
FLA-3L14	553014L	14	.0239	.195	.149	.344	.4026	.3750						
FLA-3R12	553012R	12	.0283	.195	.149	.344	.4026	.3750						
FLA-3L12	553012L	12	.0283	.195	.149	.344	.4026	.3750						
FLA-3R10	553010R	10	.0319	.195	.149	.344	.4026	.3750						
FLA-3L10	553010L	10	.0319	.195	.149	.344	.4026	.3750						
FLA-3R8	553008R	8	.0411	.195	.149	.344	.4026	.3750						
FLA-3L8	553008L	8	.0411	.195	.149	.344	.4026	.3750						
FLA-3R6	553006R	6	.0566	.195	.149	.344	.4026	.3750						
FLA-3L6	553006L	6	.0566	.195	.149	.344	.4026	.3750						
FLA-3R5	553005R	5	.0689	.195	.149	.344	.4026	.3750						
FLA-3L5	553005L	5	.0689	.195	.149	.344	.4026	.3750						
FLA-3R4	553004R	4	.0875	.195	.133	.344	.4018	.3750						
FLA-3L4	553004L	4	.0875	.195	.133	.344	.4018	.3750						
FLA-4R8	554008R	8	.0411	.255	.202	.453	.6332	.3750						
FLA-4L8	554008L	8	.0411	.255	.202	.453	.6332	.3750						
FLA-4R6	554006R	6	.0566	.255	.202	.453	.6332	.3750						
FLA-4L6	554006L	6	.0566	.255	.202	.453	.6332	.3750						
FLA-4R5	554005R	5	.0689	.255	.202	.453	.6332	.3750						
FLA-4L5	554005L	5	.0689	.255	.202	.453	.6332	.3750						
FLA-4R4	554004R	4	.0875	.255	.202	.453	.6332	.3750						
FLA-4L4	554004L	4	.0875	.255	.202	.453	.6332	.3750						
FLA-6R3	556003R	3	.1184	.383	.283	.453	.6308	.3750						
FLA-6L3	556003L	3	.1184	.383	.283	.453	.6308	.3750						
FLA-6R2.5	5560025R	2.5	.1431	.383	.283	.453	.6308	.3750						
FLA-6L2.5	5560025L	2.5	.1431	.383	.283	.453	.6308	.3750						
FLA-6R2	556002R	2	.1802	.383	.283	.453	.6308	.3750						
FLA-6L2	556002L	2	.1802	.383	.283	.453	.6308	.3750						

FLO-LOCK

ACME STUB THREADING FLAS



RH Shown



Description	EDP Code	TPI	W	T	E	A	B	Gage Dia.	Gage					
									C3	GP3	GP50	AC3	AC50	
FLAS-3R16	553216R	16	.0238	.195	.149	.344	.4026	.375						
FLAS-3L16	553216L	16	.0238	.195	.149	.344	.4026	.375						
FLAS-3R14	553214R	14	.0276	.195	.149	.344	.4026	.375						
FLAS-3L14	553214L	14	.0276	.195	.149	.344	.4026	.375						
FLAS-3R12	553212R	12	.0326	.195	.149	.344	.4026	.375						
FLAS-3L12	553212L	12	.0326	.195	.149	.344	.4026	.375						
FLAS-3R10	553210R	10	.0370	.195	.149	.344	.4026	.375						
FLAS-3L10	553210L	10	.0370	.195	.149	.344	.4026	.375						
FLAS-3R8	553208R	8	.0476	.195	.149	.344	.4026	.375						
FLAS-3L8	553208L	8	.0476	.195	.149	.344	.4026	.375						
FLAS-3R6	553206R	6	.0652	.195	.149	.344	.4026	.375						
FLAS-3L6	553206L	6	.0652	.195	.149	.344	.4026	.375						
FLAS-3R5	553205R	5	.0793	.195	.149	.344	.4026	.375						
FLAS-3L5	553205L	5	.0793	.195	.149	.344	.4026	.375						
FLAS-3R4	553204R	4	.1004	.195	.149	.344	.4026	.375						
FLAS-3L4	553204L	4	.1004	.195	.149	.344	.4026	.375						
FLAS-4R3	554203R	3	.1356	.255	.202	.453	.6332	.375						
FLAS-4L3	554203L	3	.1356	.255	.202	.453	.6332	.375						
FLAS-6R2	556202R	2	.2060	.383	.283	.453	.6308	.375						
FLAS-6L2	556202L	2	.2060	.383	.283	.453	.6308	.375						

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


	Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
▲	▲	▲	▲	▲
▲	▲	▲	▲	▲
▲	▲	▲	▲	▲



FLO-LOCK

PARTIAL TOPPING ACME THREADING FLA-PT (with corner radii)


For Flo-Lock acme thread limits see pg. 111,112.



Description	EDP Code	TPI	W	T	E	A	B	Gage Dia.	Gage					
									C3	GP3	GP50	AC3	AC50	
									Uncoated	TIN Coated	AITIN Coated			
FLA-3R16-PT	553016PTR	16	.0206	.195	.149	.344	.4026	.3750						
FLA-3L16-PT	553016PTL	16	.0206	.195	.149	.344	.4026	.3750						
FLA-3R14-PT	553014PTR	14	.0239	.195	.149	.344	.4026	.3750						
FLA-3L14-PT	553014PTL	14	.0239	.195	.149	.344	.4026	.3750						
FLA-3R12-PT	553012PTR	12	.0283	.195	.149	.344	.4026	.3750						
FLA-3L12-PT	553012PTL	12	.0283	.195	.149	.344	.4026	.3750						
FLA-3R10-PT	553010PTR	10	.0319	.195	.149	.344	.4026	.3750						
FLA-3L10-PT	553010PTL	10	.0319	.195	.149	.344	.4026	.3750						
FLA-3R8-PT	553008PTR	8	.0411	.195	.149	.344	.4026	.3750						
FLA-3L8-PT	553008PTL	8	.0411	.195	.149	.344	.4026	.3750						
FLA-3R6-PT	553006PTR	6	.0566	.195	.149	.344	.4026	.3750						
FLA-3L6-PT	553006PTL	6	.0566	.195	.149	.344	.4026	.3750						
FLA-3R5-PT	553005PTR	5	.0689	.195	.149	.344	.4026	.3750						
FLA-3L5-PT	553005PTL	5	.0689	.195	.149	.344	.4026	.3750						
FLA-3R4-PT	553004PTR	4	.0875	.195	.133	.344	.4018	.3750						
FLA-3L4-PT	553004PTL	4	.0875	.195	.133	.344	.4018	.3750						
FLA-4R8-PT	554008PTR	8	.0411	.255	.202	.453	.6332	.3750						
FLA-4L8-PT	554008PTL	8	.0411	.255	.202	.453	.6332	.3750						
FLA-4R6-PT	554006PTR	6	.0566	.255	.202	.453	.6332	.3750						
FLA-4L6-PT	554006PTL	6	.0566	.255	.202	.453	.6332	.3750						
FLA-4R5-PT	554005PTR	5	.0689	.255	.202	.453	.6332	.3750						
FLA-4L5-PT	554005PTL	5	.0689	.255	.202	.453	.6332	.3750						
FLA-4R4-PT	554004PTR	4	.0875	.255	.202	.453	.6332	.3750						
FLA-4L4-PT	554004PTL	4	.0875	.255	.202	.453	.6332	.3750						
FLA-6R3-PT	556003PTR	3	.1184	.383	.283	.453	.6308	.3750						
FLA-6L3-PT	556003PTL	3	.1184	.383	.283	.453	.6308	.3750						
FLA-6R2.5-PT	556025PTR	2.5	.1431	.383	.283	.453	.6308	.3750						
FLA-6L2.5-PT	556025PTL	2.5	.1431	.383	.283	.453	.6308	.3750						
FLA-6R2-PT	556002PTR	2	.1802	.383	.283	.453	.6308	.3750						
FLA-6L2-PT	556002PTL	2	.1802	.383	.283	.453	.6308	.3750						

FLO-LOCK

PARTIAL TOPPING ACME STUB THREADING FLAS-PT (with corner radii)



Description	EDP Code	TPI	W	T	E	A	B	Gage Dia.	Gage					
									C3	GP3	GP50	AC3	AC50	
									Uncoated	TIN Coated	AITIN Coated			
FLAS-3R16-PT	553216PTR	16	.0238	.195	.149	.344	.4026	.375						
FLAS-3L16-PT	553216PTL	16	.0238	.195	.149	.344	.4026	.375						
FLAS-3R14-PT	553214PTR	14	.0276	.195	.149	.344	.4026	.375						
FLAS-3L14-PT	553214PTL	14	.0276	.195	.149	.344	.4026	.375						
FLAS-3R12-PT	553212PTR	12	.0326	.195	.149	.344	.4026	.375						
FLAS-3L12-PT	553212PTL	12	.0326	.195	.149	.344	.4026	.375						
FLAS-3R10-PT	553210PTR	10	.0370	.195	.149	.344	.4026	.375						
FLAS-3L10-PT	553210PTL	10	.0370	.195	.149	.344	.4026	.375						
FLAS-3R8-PT	553208PTR	8	.0476	.195	.149	.344	.4026	.375						
FLAS-3L8-PT	553208PTL	8	.0476	.195	.149	.344	.4026	.375						
FLAS-3R6-PT	553206PTR	6	.0652	.195	.149	.344	.4026	.375						
FLAS-3L6-PT	553206PTL	6	.0652	.195	.149	.344	.4026	.375						
FLAS-3R5-PT	553205PTR	5	.0793	.195	.149	.344	.4026	.375						
FLAS-3L5-PT	553205PTL	5	.0793	.195	.149	.344	.4026	.375						
FLAS-3R4-PT	553204PTR	4	.1004	.195	.149	.344	.4026	.375						
FLAS-3L4-PT	553204PTL	4	.1004	.195	.149	.344	.4026	.375						
FLAS-4R3-PT	554203PTR	3	.1356	.255	.202	.453	.6332	.375						
FLAS-4L3-PT	554203PTL	3	.1356	.255	.202	.453	.6332	.375						
FLAS-6R2-PT	556202PTR	2	.2060	.383	.283	.453	.6308	.375						
FLAS-6L2-PT	556202PTL	2	.2060	.383	.283	.453	.6308	.375						

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron														
Non-Ferrous														
Stainless/High Temp														
Steel														



AMERICAN STANDARD BUTTRESS

7° LEAD

FLT B



RH Shown



For ASB specifications and application see pg. 111.

Description	EDP Code	TPI	R	T	E	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLT B-2RA	602801R	16-20	.002/.004	.150	.126	.219	.2688	.1875	●	●	●	●	●
FLT B-2LA	602801L	16-20	.002/.004	.150	.126	.219	.2688	.1875	●	●	●	●	●
FLT B-3RA	603801R	8-16	.005/.008	.195	.164	.344	.4034	.3750	●	●	●	●	●
FLT B-3LA	603801L	8-16	.005/.008	.195	.164	.344	.4034	.3750	●	●	●	●	●
FLT B-4RA	604801R	4-6	.008/.012	.255	.206	.453	.6334	.3750	●	●	●	●	●
FLT B-4LA	604801L	4-6	.008/.012	.255	.206	.453	.6334	.3750	●	●	●	●	●

AMERICAN STANDARD BUTTRESS

45° LEAD

FLT B





RH Shown

For ASB specifications and application see pg. 111.

Description	EDP Code	TPI	R	T	E	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLT B-2RB	602802R	16-20	.002/.004	.150	.010	.219	.2627	.1875	●	●	●	●	●
FLT B-2LB	602802L	16-20	.002/.004	.150	.010	.219	.2627	.1875	●	●	●	●	●
FLT B-3RB	603802R	8-16	.005/.008	.195	.012	.344	.3954	.3750	●	●	●	●	●
FLT B-3LB	603802L	8-16	.005/.008	.195	.012	.344	.3954	.3750	●	●	●	●	●
FLT B-4RB	604802R	4-6	.008/.012	.255	.016	.453	.6235	.3750	●	●	●	●	●
FLT B-4LB	604802L	4-6	.008/.012	.255	.016	.453	.6235	.3750	●	●	●	●	●

API BUTTRESS THREADING

FLDC




RH EXT Shown

Gage

Description	EDP Code	TPI	TPF	T	A	B	Gage Dia.	Coating				
								C3	GP3	GP50	AC3	AC50
FLDC-3-5B75E	553616E	5	3/4	.250	.344	.4026	.3750	●	●	●	●	●
FLDC-3-5B75I	553616I	5	3/4	.250	.344	.4026	.3750	●	●	●	●	●
FLDC-3-5B1E	553617E	5	1	.250	.344	.4026	.3750	●	●	●	●	●
FLDC-3-5B1I	553617I	5	1	.250	.344	.4026	.3750	●	●	●	●	●
FLDC-4-5B75E	554616E	5	3/4	.255	.453	.6320	.3750	●	●	●	●	●
FLDC-4-5B75I	554616I	5	3/4	.255	.453	.6320	.3750	●	●	●	●	●
FLDC-4-5B1E	554617E	5	1	.255	.453	.6320	.3750	●	●	●	●	●
FLDC-4-5B1I	554617I	5	1	.255	.453	.6320	.3750	●	●	●	●	●

API THREADING NON TOPPING

FLD



RH Shown

Gage

Description	EDP Code	TPI	R	E	T	A	B	Gage Dia.	Coating				
									C3	GP3	GP50	AC3	AC50
FLD-3038R	553438R	4	.033/.038	.082	.195	.344	.3991	.3750	●	●	●	●	●
FLD-3038L	553438L	4	.033/.038	.082	.195	.344	.3991	.3750	●	●	●	●	●
FLD-3040R	553440R	5	.015/.020	.082	.195	.344	.3991	.3750	●	●	●	●	●
FLD-3040L	553440L	5	.015/.020	.082	.195	.344	.3991	.3750	●	●	●	●	●
FLD-4038R	554438R	4	.033/.038	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLD-4038L	554438L	4	.033/.038	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLD-4040R	554440R	5	.015/.020	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLD-4040L	554440L	5	.015/.020	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLD-4050R	554450R	4	.020/.025	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLD-4050L	554450L	4	.020/.025	.128	.255	.453	.6293	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	Uncoated	TIN Coated	AITIN Coated
Cast Iron	▲	●	●
Non-Ferrous	▲	●	●
Stainless/High Temp	▲	●	●
Steel	▲	●	●



FLO-LOCK

API ROTARY SHOULDER CONNECTION THREADING FLDC




RH EXT Shown

Gage Conn. No.
Dia. or Size

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Conn. No. or Size	Coating				
										GP3	GP50	AC22	AC3	AC50
FLDC-3-530E	553613E	5	3	.147	.250	.344	.4026	.3750	3-1/2 FH, 2-3/8-4-1/2 Reg.	●	●			
FLDC-3-530I	553613I	5	3	.147	.250	.344	.4026	.3750	3-1/2 FH, 2-3/8-4-1/2 Reg.	●	●			
FLDC-4-425E	554609E	4	2	.183	.312	.453	.6320	.3750	5-1/2 FH, 6-5/8 FH & Reg.	●	●	●	●	
FLDC-4-425I	554609I	4	2	.183	.312	.453	.6320	.3750	5-1/2 FH, 6-5/8 FH & Reg.	●	●	●	●	
FLDC-4-428E	554610E	4	2	.183	.312	.453	.6320	.3750	NC23-NC50, 2-3/8-5-1/2IF	●	●	●	●	●
FLDC-4-428I	554610I	4	2	.183	.312	.453	.6320	.3750	NC23-NC50, 2-3/8-5-1/2IF	●	●	●	●	●
FLDC-4-435E	554611E	4	3	.183	.312	.453	.6320	.3750	5-1/2, 7-5/8, 8-5/8 Reg.	●	●			
FLDC-4-435I	554611I	4	3	.183	.312	.453	.6320	.3750	5-1/2, 7-5/8, 8-5/8 Reg.	●	●			
FLDC-4-438E	554612E	4	3	.183	.312	.453	.6320	.3750	NC56 - NC71	●	●			
FLDC-4-438I	554612I	4	3	.183	.312	.453	.6320	.3750	NC56 - NC71	●	●			

API ROUND THREADING FLDC





RH Shown

Gage

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLDC-3-8RDR75	553632R	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	●
FLDC-3-8RDL75	553632L	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	●
FLDC-3-10RDR75	553634R	10	3/4	.195	.125	.344	.4010	.3750			●	●	●	●
FLDC-3-10RDL75	553634L	10	3/4	.195	.125	.344	.4010	.3750			●	●	●	●

FLDC with chipbreaker

Exclusive patented design!




RH Shown

Gage

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLDC-3-8RDR75-CB	553632PR	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	●
FLDC-3-8RDL75-CB	553632PL	8	3/4	.195	.125	.344	.4010	.3750			●	●	●	●

FLDC Multi-tooth





RH Shown

Gage

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLDC-6-8RDR75M	556633R	8	3/4	.070	.383	.453	.6360	.3750			●	●	●	●
FLDC-6-10RDR75M	556635R	10	3/4	.134	.383	.453	.6360	.3750			●	●	●	●

NPT THREADING FLDC



RH Shown

Gage

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.	Coating					
									C3	GP3	GP50	AC3	AC50	
FLDC-38VR-75	553608R	8	3/4	.100	.195	.344	.4000	.3750			●	●	●	●
FLDC-38VL-75	553608L	8	3/4	.100	.195	.344	.4000	.3750			●	●	●	●
FLDC-3115VR-75	553611R	11.5	3/4	.144	.195	.344	.4000	.3750			●	●	●	●
FLDC-3115VL-75	553611L	11.5	3/4	.144	.195	.344	.4000	.3750			●	●	●	●
FLDC-314VR-75	553614R	14	3/4	.148	.195	.344	.4023	.3750			●	●	●	●
FLDC-314VL-75	553614L	14	3/4	.148	.195	.344	.4023	.3750			●	●	●	●
FLDC-318VR-75	553618R	18	3/4	.154	.195	.344	.4023	.3750			●	●	●	●
FLDC-318VL-75	553618L	18	3/4	.154	.195	.344	.4023	.3750			●	●	●	●
FLDC-327VR-75	553627R	27	3/4	.162	.195	.344	.4023	.3750			●	●	●	●
FLDC-327VL-75	553627L	27	3/4	.162	.195	.344	.4023	.3750			●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel


FLO-LOCK



NPT THREADING

FLDC

Multi-tooth



RH Shown




Gage Dia.	Coating				
	Uncoated	TIN Coated	AITIN Coated	AC3	AC50
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

Description	EDP Code	TPI	TPF	E	T	A	B	Gage Dia.
FLDC-3-8 NPT-2E	553708E	8	3/4	.058	.250	.344	.4050	.3750
FLDC -3-8 NPT-2I	553708I	8	3/4	.058	.250	.344	.4050	.3750
FLDC-3-11.5 NPT-2E	553711E	11.5	3/4	.048	.250	.344	.4050	.3750
FLDC-3-11.5 NPT-2I	553711I	11.5	3/4	.048	.250	.344	.4050	.3750

UNJ THREADING

FLJ



RH Shown




Gage Dia.	Coating				
	Uncoated	TIN Coated	AITIN Coated	AC3	AC50
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

Description	EDP Code	TPI	R	E	T	A	B	Gage Dia.
FLJ-3010R16	583216R	16	.0094/.0104	.098	.195	.344	.3999	.3750
FLJ-3010L16	583216L	16	.0094/.0104	.098	.195	.344	.3999	.3750
FLJ-3014R12	583212R	12	.0125/.0135	.098	.195	.344	.3999	.3750
FLJ-3014L12	583212L	12	.0125/.0135	.098	.195	.344	.3999	.3750
FLJ-3020R8	583208R	8	.0188/.0198	.098	.195	.344	.3999	.3750
FLJ-3020L8	583208L	8	.0188/.0198	.098	.195	.344	.3999	.3750


UNJ THREADING

FLJP

Positive rake



RH Shown




Gage Dia.	Coating				
	Uncoated	TIN Coated	AITIN Coated	AC3	AC50
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

Description	EDP Code	TPI	R	E	T	A	B	Gage Dia.
FLJP-3010R16	583816R	16	.0094/.0104	.098	.195	.344	.3999	.3750
FLJP-3010L16	583816L	16	.0094/.0104	.098	.195	.344	.3999	.3750
FLJP-3014R12	583812R	12	.0125/.0135	.098	.195	.344	.3999	.3750
FLJP-3014L12	583812L	12	.0125/.0135	.098	.195	.344	.3999	.3750
FLJP-3020R8	583808R	8	.0188/.0198	.098	.195	.344	.3999	.3750
FLJP-3020L8	583808L	8	.0188/.0198	.098	.195	.344	.3999	.3750


UNJ FINE PITCH THREADING

FLJF

For cutting close to shoulder



RH Shown



Gage Dia.	Coating				
	Uncoated	TIN Coated	AITIN Coated	AC3	AC50
C3	●	●	●	●	●
GP3	●	●	●	●	●
GP50	●	●	●	●	●
AC3	●	●	●	●	●
AC50	●	●	●	●	●

Description	EDP Code	TPI	R	E	T	A	B	Gage Dia.
FLJF-3005R32	583432R	32	.0047/.0057	.141	.195	.344	.4022	.3750
FLJF-3005L32	583432L	32	.0047/.0057	.141	.195	.344	.4022	.3750
FLJF-3006R28	583428R	28	.0054/.0064	.141	.195	.344	.4022	.3750
FLJF-3006L28	583428L	28	.0054/.0064	.141	.195	.344	.4022	.3750
FLJF-3007R24	583424R	24	.0063/.0073	.141	.195	.344	.4022	.3750
FLJF-3007L24	583424L	24	.0063/.0073	.141	.195	.344	.4022	.3750
FLJF-3008R20	583420R	20	.0075/.0085	.141	.195	.344	.4022	.3750
FLJF-3008L20	583420L	20	.0075/.0085	.141	.195	.344	.4022	.3750
FLJF-3009R18	583418R	18	.0083/.0093	.141	.195	.344	.4022	.3750
FLJF-3009L18	583418L	18	.0083/.0093	.141	.195	.344	.4022	.3750
FLJF-3010R16	583416R	16	.0094/.0104	.141	.195	.344	.4022	.3750
FLJF-3010L16	583416L	16	.0094/.0104	.141	.195	.344	.4022	.3750
FLJF-3012R14	583414R	14	.0107/.0117	.141	.195	.344	.4022	.3750
FLJF-3012L14	583414L	14	.0107/.0117	.141	.195	.344	.4022	.3750

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	Uncoated	TIN Coated	AITIN Coated	AC3	AC50
Cast Iron	●	●	●	●	●
Non-Ferrous	●	●	●	●	●
Stainless/High Temp	●	●	●	●	●
Steel	●	●	●	●	●




FLO-LOCK

UNJ FINE PITCH THREADING

FLJK

Positive rake

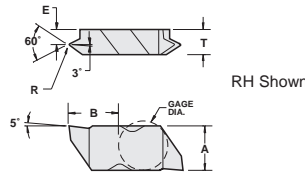


Description	EDP Code	TPI	R	E	T	A	B	Gage Dia.	Gage				
									C3	GP3	GP50	AC3	AC50
FLJK-3005R32	583632R	32	.0047/.0057	.141	.195	.344	.4022	.3750					
FLJK-3005L32	583632L	32	.0047/.0057	.141	.195	.344	.4022	.3750					
FLJK-3006R28	583628R	28	.0054/.0064	.141	.195	.344	.4022	.3750					
FLJK-3006L28	583628L	28	.0054/.0064	.141	.195	.344	.4022	.3750					
FLJK-3007R24	583624R	24	.0063/.0073	.141	.195	.344	.4022	.3750					
FLJK-3007L24	583624L	24	.0063/.0073	.141	.195	.344	.4022	.3750					
FLJK-3008R20	583620R	20	.0075/.0085	.141	.195	.344	.4022	.3750					
FLJK-3008L20	583620L	20	.0075/.0085	.141	.195	.344	.4022	.3750					
FLJK-3009R18	583618R	18	.0083/.0093	.141	.195	.344	.4022	.3750					
FLJK-3009L18	583618L	18	.0083/.0093	.141	.195	.344	.4022	.3750					
FLJK-3010R16	583616R	16	.0094/.0104	.141	.195	.344	.4022	.3750					
FLJK-3010L16	583616L	16	.0094/.0104	.141	.195	.344	.4022	.3750					
FLJK-3012R14	583614R	14	.0107/.0117	.141	.195	.344	.4022	.3750					
FLJK-3012L14	583614L	14	.0107/.0117	.141	.195	.344	.4022	.3750					

UN THREADING

FLTC

Crest topping

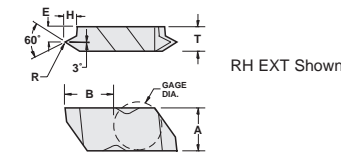

Description	EDP Code	TPI	R	E	H	T	A	B	Gage Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLTC-3R7E	613007R	7	.017	.107	.108	.195	.344	.4004	.3750					
FLTC-3L7E	613007L	7	.017	.107	.108	.195	.344	.4004	.3750					
FLTC-3R7I	613207R	7	.009	.107	.092	.195	.344	.4004	.3750					
FLTC-3L7I	613207L	7	.009	.107	.092	.195	.344	.4004	.3750					
FLTC-3R8E	613008R	8	.015	.107	.094	.195	.344	.4004	.3750					
FLTC-3L8E	613008L	8	.015	.107	.094	.195	.344	.4004	.3750					
FLTC-3R8I	613208R	8	.007	.107	.081	.195	.344	.4004	.3750					
FLTC-3L8I	613208L	8	.007	.107	.081	.195	.344	.4004	.3750					
FLTC-3R9E	613009R	9	.013	.107	.084	.195	.344	.4004	.3750					
FLTC-3L9E	613009L	9	.013	.107	.084	.195	.344	.4004	.3750					
FLTC-3R9I	613209R	9	.006	.107	.072	.195	.344	.4004	.3750					
FLTC-3L9I	613209L	9	.006	.107	.072	.195	.344	.4004	.3750					
FLTC-3R10E	613010R	10	.012	.107	.076	.195	.344	.4004	.3750					
FLTC-3L10E	613010L	10	.012	.107	.076	.195	.344	.4004	.3750					
FLTC-3R10I	613210R	10	.005	.107	.065	.195	.344	.4004	.3750					
FLTC-3L10I	613210L	10	.005	.107	.065	.195	.344	.4004	.3750					
FLTC-3R11E	613011R	11	.011	.107	.069	.195	.344	.4004	.3750					
FLTC-3L11E	613011L	11	.011	.107	.069	.195	.344	.4004	.3750					
FLTC-3R11I	613211R	11	.005	.107	.059	.195	.344	.4004	.3750					
FLTC-3L11I	613211L	11	.005	.107	.059	.195	.344	.4004	.3750					
FLTC-3R12E	613012R	12	.010	.148	.051	.195	.344	.4025	.3750					
FLTC-3L12E	613012L	12	.010	.148	.051	.195	.344	.4025	.3750					
FLTC-3R12I	613212R	12	.004	.148	.048	.195	.344	.4025	.3750					
FLTC-3L12I	613212L	12	.004	.148	.048	.195	.344	.4025	.3750					
FLTC-3R14E	613014R	14	.009	.148	.054	.195	.344	.4025	.3750					
FLTC-3L14E	613014L	14	.009	.148	.054	.195	.344	.4025	.3750					
FLTC-3R14I	613214R	14	.003	.148	.044	.195	.344	.4025	.3750					
FLTC-3L14I	613214L	14	.003	.148	.044	.195	.344	.4025	.3750					
FLTC-3R16E	613016R	16	.008	.148	.046	.195	.344	.4025	.3750					
FLTC-3L16E	613016L	16	.008	.148	.046	.195	.344	.4025	.3750					
FLTC-3R16I	613216R	16	.003	.148	.040	.195	.344	.4025	.3750					
FLTC-3L16I	613216L	16	.003	.148	.040	.195	.344	.4025	.3750					
FLTC-3R18E	613018R	18	.007	.148	.041	.195	.344	.4025	.3750					
FLTC-3L18E	613018L	18	.007	.148	.041	.195	.344	.4025	.3750					
FLTC-3R18I	613218R	18	.003	.148	.036	.195	.344	.4025	.3750					
FLTC-3L18I	613218L	18	.003	.148	.036	.195	.344	.4025	.3750					
FLTC-3R20E	613020R	20	.006	.148	.037	.195	.344	.4025	.3750					
FLTC-3L20E	613020L	20	.006	.148	.037	.195	.344	.4025	.3750					
FLTC-3R20I	613220R	20	.003	.148	.031	.195	.344	.4025	.3750					
FLTC-3L20I	613220L	20	.003	.148	.031	.195	.344	.4025	.3750					
FLTC-3R24E	613024R	24	.005	.148	.031	.195	.344	.4025	.3750					
FLTC-3L24E	613024L	24	.005	.148	.031	.195	.344	.4025	.3750					
FLTC-3R24I	613224R	24	.003	.148	.026	.195	.344	.4025	.3750					
FLTC-3L24I	613224L	24	.003	.148	.026	.195	.344	.4025	.3750					
FLTC-3R28*	613028R	28	.003	.148	.023	.195	.344	.4025	.3750					
FLTC-3L28*	613028L	28	.003	.148	.023	.195	.344	.4025	.3750					
FLTC-3R32*	613228R	32	.003	.148	.021	.195	.344	.4025	.3750					
FLTC-3L32*	613228L	32	.003	.148	.021	.195	.344	.4025	.3750					

*Will work for either internal or external.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
▲	●	●	●
▲	●	●	●
▲	●	●	●

FLO-LOCK




60° V-THREADING

FLTF

Fine pitch

For 60° V-thread limits see pg. 112.



RH Shown




Description	EDP Code	TPI		R	E	T	A	B	Gage Dia.	Gage						
		Int	Ext							C25	GP3	GP4	GP50	GP520	AC3	AC50
FLTF-2R	612400R	12-24	14-44	.002/.004	.110	.150	.219	.2679	.1875	●	●	●	●	●	●	●
FLTF-2L	612400L	12-24	14-44	.002/.004	.110	.150	.219	.2679	.1875	●	●	●	●	●	●	●
FLTF-3R	613400R	9-24	10-44	.002/.004	.141	.195	.344	.4022	.3750	●	●	●	●	●	●	●
FLTF-3L	613400L	9-24	10-44	.002/.004	.141	.195	.344	.4022	.3750	●	●	●	●	●	●	●
FLTF-4R	614400R	9-24	10-44	.002/.004	.201	.255	.453	.6322	.3750	●	●	●	●	●	●	●
FLTF-4L	614400L	9-24	10-44	.002/.004	.201	.255	.453	.6322	.3750	●	●	●	●	●	●	●


60° V-THREADING

FLTK

Positive rake



RH Shown



Description	EDP Code	TPI		R	E	T	A	B	Gage Dia.	Gage						
		Int	Ext							C25	GP3	GP4	GP50	GP520	AC3	AC50
FLTK-2R	612600R	12-24	14-44	.002/.004	.110	.150	.219	.2679	.1875	●	●	●	●	●	●	●
FLTK-2L	612600L	12-24	14-44	.002/.004	.110	.150	.219	.2679	.1875	●	●	●	●	●	●	●
FLTK-3R	613600R	9-24	10-44	.002/.004	.141	.195	.344	.4022	.3750	●	●	●	●	●	●	●
FLTK-3L	613600L	9-24	10-44	.002/.004	.141	.195	.344	.4022	.3750	●	●	●	●	●	●	●
FLTK-4R	614600R	9-24	10-44	.002/.004	.201	.255	.453	.6322	.3750	●	●	●	●	●	●	●
FLTK-4L	614600L	9-24	10-44	.002/.004	.201	.255	.453	.6322	.3750	●	●	●	●	●	●	●


60° V-THREADING - CHIP-FLO

FLT-CB

Features:

Exclusive patented design!

- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Fewer scarred threads
- For coarse and fine pitches



RH Shown




Description	EDP Code	TPI		R	E	T	A	B	Gage Dia.	Gage						
		Int	Ext							C25	C3	GP22	GP4	GP50	GP520	AC22
FLT-3R-HCB	603600HCR	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3L-HCB	603600HCL	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3RC-HCB	603612HCR	5-6	6-11	.012/.015	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3LC-HCB	603612HCL	5-6	6-11	.012/.015	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3R-CB	603600CR	8-12	8-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3L-CB	603600CL	8-12	8-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3R-FCB	603600FCR	7-20	8-36	.003/.005	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3L-FCB	603600FCL	7-20	8-36	.003/.005	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-4R-HCB	604600HCR	4-12	4-20	.005/.008	.128	.255	.453	.6298	.3750	●	●	●	●	●	●	●
FLT-4L-HCB	604600HCL	4-12	4-20	.005/.008	.128	.255	.453	.6298	.3750	●	●	●	●	●	●	●

60° V-THREADING

FLT

For 60° V-thread limits see pg. 112.



RH Shown



Description	EDP Code	TPI		R	E	T	A	B	Gage Dia.	Gage						
		Int	Ext							C25	GP3	GP4	GP50	AC22	AC3	AC50
FLT-2R	602600R	7-20	8-36	.003/.005	.075	.150	.219	.2661	.1875	●	●	●	●	●	●	●
FLT-2L	602600L	7-20	8-36	.003/.005	.075	.150	.219	.2661	.1875	●	●	●	●	●	●	●
FLT-3R	603600R	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3L	603600L	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3010R	603610R	5-12	6-18	.009/.011	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-3010L	603610L	5-12	6-18	.009/.011	.098	.195	.344	.3999	.3750	●	●	●	●	●	●	●
FLT-4R	604600R	4-12	4-20	.005/.008	.128	.255	.453	.6298	.3750	●	●	●	●	●	●	●
FLT-4L	604600L	4-12	4-20	.005/.008	.128	.255	.453	.6298	.3750	●	●	●	●	●	●	●

In an effort to improve our stock standard grade offering there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C25	GP3	GP4	GP50	AC22	AC3	AC50
Cast Iron	▲						●
Non-Ferrous							●
Stainless/High Temp	▲						●
Steel			▲	▲			●




FLO-LOCK

60° V-THREADING

FLTP

Positive rake

For 60° V-thread limits see pg. 112.


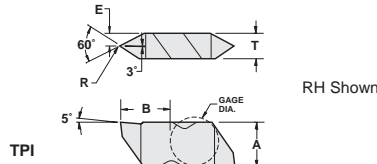


Description	EDP Code	Int	Ext	R	E	T	A	B	Dia.	Gage				
										C25	GP3	GP50	AC3	AC50
FLTP-2R	612800R	7-20	8-36	.003/.005	.075	.150	.219	.2661	.1875	●	●	●	●	●
FLTP-2L	612800L	7-20	8-36	.003/.005	.075	.150	.219	.2661	.1875	●	●	●	●	●
FLTP-3R	613800R	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●
FLTP-3L	613800L	5-12	6-20	.005/.008	.098	.195	.344	.3999	.3750	●	●	●	●	●
FLTP-4R	614800R	4-12	4-20	.005/.008	.128	.255	.453	.6293	.3750	●	●	●	●	●
FLTP-4L	614800L	4-12	4-20	.005/.008	.128	.255	.453	.6293	.3750	●	●	●	●	●

UNDERCUTTING

FLU



For use in FLRR/L holders

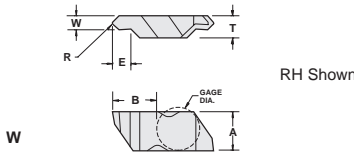

Description	EDP Code	Inch	Metric	R	E	T	A	B	Dia.	Gage				
										C3	GP3	GP50	AC3	AC50
FLU-3094R	623094R	.094	2,39	.020	.125	.195	.344	.4050	.3750	●	●	●	●	●
FLU-3094L	623094L	.094	2,39	.020	.125	.195	.344	.4050	.3750	●	●	●	●	●
FLU-3125R	623125R	.125	3,18	.047	.188	.195	.344	.4050	.3750	●	●	●	●	●
FLU-3125L	623125L	.125	3,18	.047	.188	.195	.344	.4050	.3750	●	●	●	●	●
FLU-3156R	623156R	.156	3,96	.047	.188	.195	.344	.4050	.3750	●	●	●	●	●
FLU-3156L	623156L	.156	3,96	.047	.188	.195	.344	.4050	.3750	●	●	●	●	●

POLY-V

FLV

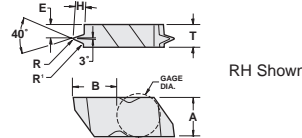

Description	EDP Code	R	R1	E	T	H	A	B	Dia.	Gage				
										C25	GP3	GP50	AC3	AC50
FLV-3RJ	623800R	.012	.008	.125	.195	.087	.344	.4013	.3750	●	●	●	●	●
FLV-3LJ	623800L	.012	.008	.125	.195	.087	.344	.4013	.3750	●	●	●	●	●
FLV-4RL	624800R	.012	.015	.118	.255	.201	.453	.6288	.3750	●	●	●	●	●
FLV-4LL	624800L	.012	.015	.118	.255	.201	.453	.6288	.3750	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

	Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
●	▲	▲	▲	●
▲	▲	▲	▲	●

EXTERNAL HOLDER (INCH)

FLSR/L

Threading and Grooving



RH SHOWN

Most holders available with coolant port (ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	D	F*	Seat		Clamp	Clamp Screw
								Seat	Screw		
FLSR-62	93400608C	FL_-2R	3/8	3/8	2-1/2	.14	.562	-	-	TF-74	S-310
FLSL-62	93300608C	FL_-2L	3/8	3/8	2-1/2	.14	.562	-	-	TF-75	S-310
FLSR-82V	93400808V	FL_-2R	1/2	1/2	3-1/2	.14	.750	-	-	TF-74	S-310
FLSL-82V	93300808V	FL_-2L	1/2	1/2	3-1/2	.14	.750	-	-	TF-75	S-310
FLSR-102B	93401008B	FL_-2R	5/8	5/8	4-1/2	.14	1.000	-	-	TF-74	S-310
FLSR-122B	93401208B	FL_-2R	3/4	3/4	4-1/2	.14	1.000	-	-	TF-74	S-310
FLSL-122B	93301208B	FL_-2L	3/4	3/4	4-1/2	.14	1.000	-	-	TF-75	S-310
FLSR-162C	93401608C	FL_-2R	1	1.000	5	.14	1.250	-	-	TF-74	S-310
FLSL-162C	93301608C	FL_-2L	1	1.000	5	.14	1.250	-	-	TF-75	S-310
FLSR-123B	93401216B	FL_-3R	3/4	3/4	4-1/2	.21	1.000	-	-	TF-72	S-412
FLSL-123B	93301216B	FL_-3L	3/4	3/4	4-1/2	.21	1.000	-	-	TF-73	S-412
FLSR-163C	93401616C	FL_-3R	1	1	5	.21	1.250	-	-	TF-72	S-412
FLSL-163C	93301616C	FL_-3L	1	1	5	.21	1.250	-	-	TF-73	S-412
FLSR-163D	93401616D	FL_-3R	1	1	6	.21	1.250	-	-	TF-72	S-412
FLSL-163D	93301616D	FL_-3L	1	1	6	.21	1.250	-	-	TF-73	S-412
FLSR-203D	93402016D	FL_-3R	1-1/4	1-1/4	6	.21	1.500	-	-	TF-72	S-412
FLSL-203D	93302016D	FL_-3L	1-1/4	1-1/4	6	.21	1.500	-	-	TF-73	S-412
FLSR-164D	93401620D	FL_-4R	1	1	6	.29	1.250	SM-420	SL-344	TF-72	S-412
FLSL-164D	93301620D	FL_-4L	1	1	6	.29	1.250	SM-420	SL-344	TF-73	S-412
FLSR-204D	93402020D	FL_-4R	1-1/4	1-1/4	6	.29	1.500	SM-420	SL-344	TF-72	S-412
FLSL-204D	93302020D	FL_-4L	1-1/4	1-1/4	6	.29	1.500	SM-420	SL-344	TF-73	S-412
FLSR-205D	93402024D	FL_-5R	1-1/4	1-1/4	6	.40	1.500	-	-	TF-80	S-352
FLSL-205D	93302024D	FL_-5L	1-1/4	1-1/4	6	.40	1.500	-	-	TF-81	S-352
FLSR-206D	93402028D	FL_-6R	1-1/4	1-1/4	6	.29	1.500	SM-416	S-111	TF-120	S-412
FLSL-206D	93302028D	FL_-6L	1-1/4	1-1/4	6	.29	1.500	SM-416	S-111	TF-121	S-412



* "F" Dim. over sharp point of grooving insert.



EXTERNAL HOLDER (METRIC)

FLSR/L

Threading and Grooving

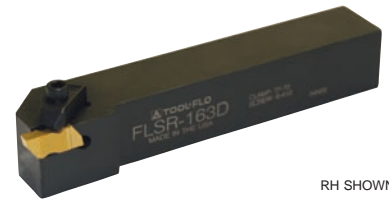

RH SHOWN

Most holders available with coolant port (ie: Add CP to end of description)



Description	EDP Code	Insert	A	B	C	D	F*	Seat	Seat Screw	Clamp	Clamp Screw
FLSR-2020M2	93412008	FL_-2R	20,0	20,0	125,0	3,0	25,0	-	-	TF-74	S-310
FLSL-2020M2	93312008	FL_-2L	20,0	20,0	125,0	3,0	25,0	-	-	TF-75	S-310
FLSR-2525M2	93412508	FL_-2R	25,0	25,0	150,0	3,0	32,0	-	-	TF-74	S-310
FLSL-2525M2	93312508	FL_-2L	25,0	25,0	150,0	3,0	32,0	-	-	TF-75	S-310
FLSR-2020M3	93412016	FL_-3R	20,0	20,0	125,0	5,0	32,0	-	-	TF-72	S-412
FLSL-2020M3	93312016	FL_-3L	20,0	20,0	125,0	5,0	32,0	-	-	TF-73	S-412
FLSR-2525M3	93412516	FL_-3R	25,0	25,0	150,0	5,0	32,0	-	-	TF-72	S-412
FLSL-2525M3	93312516	FL_-3L	25,0	25,0	150,0	5,0	32,0	-	-	TF-73	S-412

* "F" Dim. over sharp point of grooving insert.

EXTERNAL HOLDER (INCH)

FLER/L

Threading and Grooving

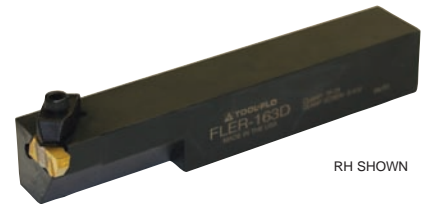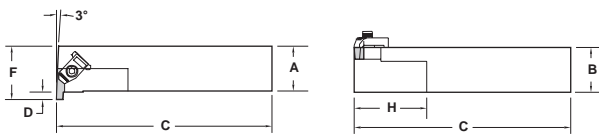

RH SHOWN

Most holders available with coolant port (ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	D	F*	H	Clamp	Clamp Screw
FLER-82V	93100808V	FL_-2L	1/2	1/2	3-1/2	.14	.750	1	TF-75	S-310
FLER-122B	93101208B	FL_-2L	3/4	3/4	4-1/2	.14	1.000	1	TF-75	S-310
FLEL-122B	93001208B	FL_-2R	3/4	3/4	4-1/2	.14	1.000	1	TF-74	S-310
FLER-162C	93101608C	FL_-2L	1	1	5	.14	1.250	1	TF-75	S-310
FLEL-162C	93001608C	FL_-2R	1	1	5	.14	1.250	1	TF-74	S-310
FLER-123B	93101216B	FL_-3L	3/4	3/4	4-1/2	.21	1.125	2	TF-73	S-412
FLEL-123B	93001216B	FL_-3R	3/4	3/4	4-1/2	.21	1.125	2	TF-72	S-412
FLER-163D	93101616D	FL_-3L	1	1	6.000	.21	1.250	2	TF-73	S-412
FLEL-163D	93001616D	FL_-3R	1	1	6.000	.21	1.250	2	TF-72	S-412
FLER-203D	93102016D	FL_-3L	1-1/4	1-1/4	6.000	.21	1.500	2	TF-73	S-412
FLEL-203D	93002016D	FL_-3R	1-1/4	1-1/4	6.000	.21	1.500	2	TF-72	S-412
FLER-164D	93101620D	FL_-4L	1	1	6.000	.29	1.375	2	TF-73	S-412
FLEL-164D	93001620D	FL_-4R	1	1	6.000	.29	1.375	2	TF-72	S-412
FLER-204D	93102020D	FL_-4L	1-1/4	1-1/4	6.000	.29	1.625	2	TF-73	S-412
FLEL-204D	93002020D	FL_-4R	1-1/4	1-1/4	6.000	.29	1.625	2	TF-72	S-412
FLER-205D	93102024D	FL_-5L	1-1/4	1-1/4	6.000	.29	2.000	2	TF-81	S-352
FLEL-205D	93002024D	FL_-5R	1-1/4	1-1/4	6.000	.29	2.000	2	TF-80	S-352
FLER-206D	93102028D	FL_-6L	1-1/4	1-1/4	6.000	.29	1.625	2	TF-121	S-412
FLEL-206D	93002028D	FL_-6R	1-1/4	1-1/4	6.000	.29	1.625	2	TF-120	S-412



* C&F measured over sharp point of grooving insert

EXTERNAL HOLDER (INCH)

FLASR/L

Threading and Grooving

Design for Swiss machines

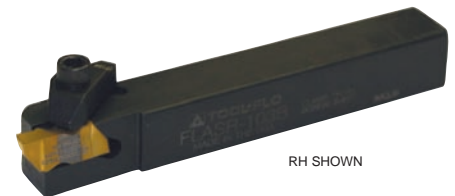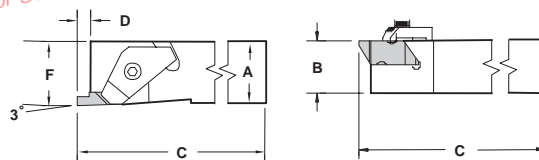

RH SHOWN

Most holders available with coolant port (ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLASR-062D	92900608D	FL_-2R	3/8	3/8	6	.138	.375	TF-182	S-310
FLASL-062D	92650608D	FL_-2L	3/8	3/8	6	.138	.375	TF-183	S-310
FLASR-082D	92900808D	FL_-2R	1/2	1/2	6	.138	.500	TF-182	S-310
FLASL-082D	92650808D	FL_-2L	1/2	1/2	6	.138	.500	TF-183	S-310
FLASR-102B	92901008B	FL_-2R	5/8	5/8	4-1/2	.138	.625	TF-184	S-412
FLASR-103B	92901016B	FL_-3R	5/8	5/8	4-1/2	.21	.625	TF-184	S-412
FLASL-103B	92891016B	FL_-3L	5/8	5/8	4-1/2	.21	.625	TF-185	S-412

* "F" Dim. over sharp point of grooving insert.




FLO-LOCK

EXTERNAL HOLDER (METRIC)

FLASR/L

Threading and Grooving

Design for Swiss machines

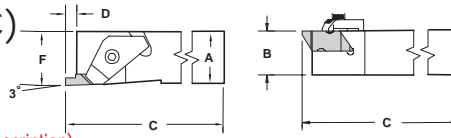

RH SHOWN

Most holders available with coolant port (ie: Add CP to end of description)




Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLASR-1010M2	92711008	FL_-2R	10,0	10,0	150,0	3,51	10,0	TF-182	S-310
FLASL-1010M2	92661008	FL_-2L	10,0	10,0	150,0	3,51	10,0	TF-183	S-310
FLASR-1212M2	92711208	FL_-2R	12,0	12,0	150,0	3,51	12,0	TF-182	S-310
FLASL-1212M2	92661208	FL_-2L	12,0	12,0	150,0	3,51	12,0	TF-183	S-310
FLASR-1616M2	92711608	FL_-2R	16,0	16,0	150,0	3,51	16,0	TF-184	S-412
FLASR-1616M3	92711616	FL_-3R	16,0	16,0	125,0	5,31	16,0	TF-184	S-412
FLASL-1616M3	92661616	FL_-3L	16,0	16,0	125,0	5,31	16,0	TF-185	S-412

EXTERNAL HOLDER (INCH)

FLRR/L

Undercutting

Most holders available with coolant port (ie: Add CP to end of description)

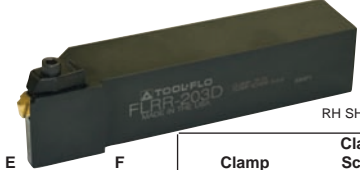

RH SHOWN


Description	EDP Code	Insert	A	B	C	E	F	Clamp	Clamp Screw
FLRR-123B	93201216B	FLU-3L	3/4	3/4	4-1/2	1-1/4	1.000	TF-73	S-412
FLRL-123B	93181216B	FLU-3R	3/4	3/4	4-1/2	1-1/4	1.000	TF-72	S-412
FLRR-163D	93201616D	FLU-3L	1	1	6	1-1/4	1.250	TF-73	S-412
FLRL-163D	93181616D	FLU-3R	1	1	6	1-1/4	1.250	TF-72	S-412
FLRR-203D	93202016D	FLU-3L	1-1/4	1-1/4	6	1-1/4	1.500	TF-73	S-412
FLRL-203D	93182016D	FLU-3R	1-1/4	1-1/4	6	1-1/4	1.500	TF-72	S-412

INTERNAL HOLDER (INCH)

A-FLER/L

Threading and Grooving

Coolant hole

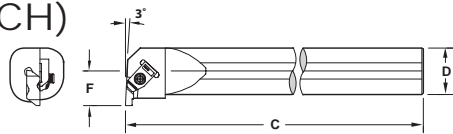

RH SHOWN

Description	EDP Code	Stock Status	Insert	Min. Bore	D	C	F	Clamp	Clamp Screw
A08-FLER2	96500808	●	FL-2L	.730	.500	8	.437	TF-146	S-310
A08-FLEL2	96400808	●	FL-2R	.730	.500	8	.437	TF-147	S-310
A10-FLER2	96501008	●	FL-2L	1.000	.625	10	.500	TF-75	S-310
A12-FLER2	96501208	●	FL-2L	1.125	.750	10	.562	TF-75	S-310
A12-FLEL2	96401208	●	FL-2R	1.125	.750	10	.562	TF-74	S-310
A16-FLER2	96501608	●	FL-2L	1.375	1.000	12	.688	TF-75	S-310
A16-FLEL2	96401608	●	FL-2R	1.375	1.000	12	.688	TF-74	S-310
A16-FLER3	96501616	●	FL-3L	1.375	1.000	12	.688	TF-73	S-412
A16-FLEL3	96401616	●	FL-3R	1.375	1.000	12	.688	TF-72	S-412
A20-FLER3	96502016	○	FL-3L	1.750	1.250	14	.875	TF-73	S-412
A20-FLEL3	96402016	○	FL-3R	1.750	1.250	14	.875	TF-72	S-412
A24-FLER3	96502416	●	FL-3L	2.000	1.500	14	1.000	TF-73	S-412
A24-FLEL3	96402416	●	FL-3R	2.000	1.500	14	1.000	TF-72	S-412
A28-FLER3	96502816	○	FL-3L	2.250	1.750	14	1.125	TF-73	S-412
A32-FLER3	96503216	●	FL-3L	2.500	2.000	16	1.250	TF-73	S-412
A32-FLEL3	96403216	●	FL-3R	2.500	2.000	16	1.250	TF-72	S-412
A28-FLER4	96502820	●	FL-4L	2.250	1.750	16	1.250	TF-73	S-412
A28-FLEL4	96402820	●	FL-4R	2.250	1.750	16	1.250	TF-72	S-412
A32-FLER4	96503220	●	FL-4L	2.750	2.000	16	1.296	TF-73	S-412
A32-FLEL4	96403220	●	FL-4R	2.750	2.000	16	1.296	TF-72	S-412
A32-FLER5	96503224	●	FL-5L	2.812	2.000	16	1.406	CM-81	S-352
A32-FLER6	96503228	●	FL-6L	2.750	2.000	16	1.375	CM-121	S-412


"F" and "C" Dim. over sharp point of grooving insert.

INTERNAL HOLDER (METRIC)

A_M-FLER/L

Threading and Grooving

Coolant hole

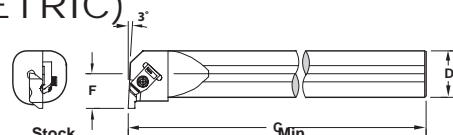

RH SHOWN

Description	EDP Code	Stock Status	Insert	Min. Bore	D	C	F	Clamp	Clamp Screw
A16M-FLER2	96441608	●	FL-2L	25,4	16,0	250,0	12,65	TF-75	S-310
A20M-FLER2	96442008	●	FL-2L	28,6	20,0	250,0	13,8	TF-75	S-310
A25M-FLER2	96442508	●	FL-2L	34,9	25,0	300,0	17,7	TF-75	S-310
A25M-FLEL2	96432508	●	FL-2R	34,9	25,0	300,0	17,7	TF-74	S-310
A25M-FLER3	96442516	●	FL-3L	34,9	25,0	300,0	17,7	TF-73	S-412
A25M-FLEL3	96432516	●	FL-3R	34,9	25,0	300,0	17,7	TF-72	S-412
A32M-FLER3	96443216	○	FL-3L	44,45	32,0	350,0	22,1	TF-73	S-412
A32M-FLEL3	96433216	○	FL-3R	44,45	32,0	350,0	22,1	TF-72	S-412
A40M-FLER3	96444016	●	FL-3L	50,8	40,0	350,0	24,45	TF-73	S-412
A40M-FLEL3	96434016	●	FL-3R	50,8	40,0	350,0	24,45	TF-72	S-412
A50M-FLER4	96445020	●	FL-4L	63,5	50,0	400,0	35,3	TF-72	S-412
A50M-FLEL4	96435020	●	FL-4R	63,5	50,0	400,0	35,3	TF-72	S-412

"F" and "C" Dim. over sharp point of grooving insert.





EXTERNAL HOLDER FLSRLT

For double ended FLGT/FLRT inserts
Inch

Exclusive TOOL-FLO design!

Most holders available with coolant port
(ie: Add CP to end of description)

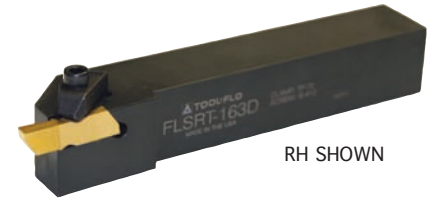

Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLSRT-163D	93431616D	FLGT-3R	1.000	1.000	6.000	.440	1.250	TF-72	S-412
FLSLT-163D	93421616D	FLGT-3L	1.000	1.000	6.000	.440	1.250	TF-73	S-412
FLSRT-203D	93432016D	FLGT-3R	1.250	1.250	6.000	.440	1.500	TF-72	S-412
FLSLT-203D	93422016D	FLGT-3L	1.250	1.250	6.000	.440	1.500	TF-73	S-412
FLSRT-164D	93431620D	FLGT-4R	1.000	1.000	6.000	.560	1.250	TF-72	S-412
FLSLT-164D	93421620D	FLGT-4L	1.000	1.000	6.000	.560	1.250	TF-73	S-412
FLSRT-204D	93432020D	FLGT-4R	1.250	1.250	6.000	.560	1.500	TF-72	S-412
FLSLT-204D	93422020D	FLGT-4L	1.250	1.250	6.000	.560	1.500	TF-73	S-412

METRIC



Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLSRT-2525M3	934325M16	FLGT/RT-3R	25,0	25,0	152,4	11,2	32,0	TF-72	S-412
FLSLT-2525M3	934225M16	FLGT/RT-3L	25,0	25,0	152,4	11,2	32,0	TF-73	S-412
FLSRT-3232M3	934332M16	FLGT/RT-3R	32,0	32,0	152,4	11,2	40,0	TF-72	S-412
FLSLT-3232M3	934232M16	FLGT/RT-3L	32,0	32,0	152,4	11,2	40,0	TF-73	S-412
FLSRT-2525M4	934325M20	FLGT/RT-4R	25,0	25,0	152,4	14,2	32,0	TF-72	S-412
FLSLT-2525M4	934225M20	FLGT/RT-4L	25,0	25,0	152,4	14,2	32,0	TF-73	S-412
FLSRT-3232M4	934332M20	FLGT/RT-4R	32,0	32,0	152,4	14,2	40,0	TF-72	S-412
FLSLT-3232M4	934232M20	FLGT/RT-4L	32,0	32,0	152,4	14,2	40,0	TF-73	S-412

FLER/LT

For double ended FLGT/FLRT inserts
Inch

Exclusive TOOL-FLO design!

Most holders available with coolant port
(ie: Add CP to end of description)

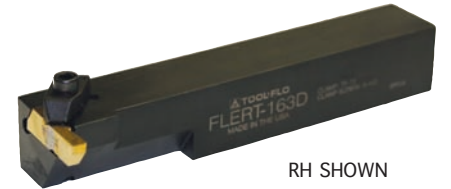


Description	EDP Code	Insert	A	B	C	D	F	Clamp	Clamp Screw
FLERT-163D	93111616D	FLGT-3L	1.000	1.000	6.000	.440	1.250	TF-72	S-412
FLELT-163D	93011616D	FLGT-3R	1.000	1.000	6.000	.440	1.250	TF-73	S-412
FLERT-203D	93112016D	FLGT-3L	1.250	1.250	6.000	.440	1.500	TF-72	S-412
FLELT-203D	93012016D	FLGT-3R	1.250	1.250	6.000	.440	1.500	TF-73	S-412
FLERT-164D	93111620D	FLGT-4L	1.000	1.000	6.000	.560	1.250	TF-72	S-412
FLELT-164D	93011620D	FLGT-4R	1.000	1.000	6.000	.560	1.250	TF-73	S-412
FLERT-204D	93112020D	FLGT-4L	1.250	1.250	6.000	.560	1.500	TF-72	S-412
FLELT-204D	93012020D	FLGT-4R	1.250	1.250	6.000	.560	1.500	TF-73	S-412

INTERNAL BAR A_FLER/LT

For double ended FLGT/FLRT inserts
Inch

Exclusive TOOL-FLO design!

Most holders available with coolant port
(ie: Add CP to end of description)

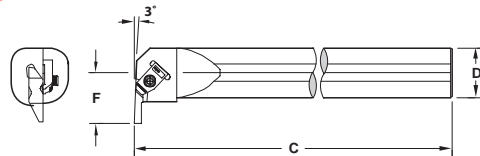

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw
A20-FLERT3	96552016	FLGT/RT-3L	1.250	6.000	1.082	1.807	TF-72	S-412
A20-FLELT3	96452016	FLGT/RT-3R	1.250	6.000	1.082	1.807	TF-73	S-412
A24-FLERT3	96552416	FLGT/RT-3L	1.500	6.000	1.207	2.057	TF-72	S-412
A24-FLELT3	96452416	FLGT/RT-3R	1.500	6.000	1.207	2.057	TF-73	S-412
A28-FLERT4	96552820	FLGT/RT-4L	1.750	6.000	1.500	2.475	TF-72	S-412
A28-FLELT4	96452820	FLGT/RT-4R	1.750	6.000	1.500	2.475	TF-73	S-412

METRIC

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw
A32M-FLERT3	96442016	FLGT/RT-3L	32,0	152,4	27,48	46,0	TF-72	S-412
A32M-FLELT3	96432016	FLGT/RT-3R	32,0	152,4	27,48	46,0	TF-73	S-412
A40M-FLERT3	96442416	FLGT/RT-3L	40,0	152,4	31,60	54,15	TF-72	S-412
A40M-FLELT3	96432416	FLGT/RT-3R	40,0	152,4	31,60	54,15	TF-73	S-412
A50M-FLERT4	96442820	FLGT/RT-4L	50,0	152,4	40,87	68,43	TF-72	S-412
A50M-FLELT4	96432820	FLGT/RT-4R	50,0	152,4	40,87	68,43	TF-73	S-412




FLO-LOCK

INTERCHANGEABLE HEADS

H-FLER

Threading and Grooving




RH SHOWN

PARTS

Description	EDP Code	Insert	D	C	c	F	Min. Bore	Clamp	Clamp Screw
H20-FLER3W	93502016W	FL-3L	1-1/4	1.625		.875	1.750	TF-73	S-412
H24-FLER3W	93502416W	FL-3L	1-1/2	1.625		1.000	2.000	TF-73	S-412
H28-FLER3W	93502816W	FL-3L	1-3/4	1.625		1.125	2.250	TF-73	S-412
H32-FLER3W	93503216W	FL-3L	2	1.625		1.250	2.500	TF-73	S-412
H40-FLER3W	93504016W	FL-3L	2-1/2	1.625		1.500	3.000	TF-73	S-412
H28-FLER4W	93502820W	FL-4L	1-3/4	1.625		1.250	2.500	TF-73	S-412
H32-FLER4W	93503220W	FL-4L	2	1.625		1.375	2.750	TF-73	S-412
H36-FLER4W	93503620W	FL-4L	2-1/4	1.625		1.500	3.000	TF-73	S-412
H40-FLER4W	93504020W	FL-4L	2-1/2	1.625		1.625	3.250	TF-73	S-412
H28-FLER6W	93502828W	FL-6L	1-3/4	1.625		1.250	2.500	TF-121	S-412
H32-FLER6W	93503228W	FL-6L	2	1.625		1.375	2.750	TF-121	S-412
H40-FLER6W	93504028W	FL-6L	2-1/2	1.625		1.625	3.250	TF-121	S-412

*Left hand quoted on request

HS-FLEL/R*



RH SHOWN




PARTS

Description	EDP Code	Insert	d	C	c	F	Min. Bore (D)	Clamp	Clamp Screw
HS32-FLER3W	9IHS65032M16	FL-3L	1.25	1.34		0.866	1.730	TF-73	S-412
HS40-FLER3W	9IHS65040M16	FL-3L	1.57	1.58		1.102	2.210	TF-73	S-412
HS50-FLER3W	9IHS65050M16	FL-3L	1.97	1.65		1.380	2.760	TF-73	S-412
HS60-FLER3W	9IHS65060M16	FL-3L	2.36	1.75		1.740	3.480	TF-73	S-412
HS50-FLER4W	9IHS65050M20	FL-4L	1.97	1.65		1.380	2.760	TF-73	S-412
HS60-FLER4W	9IHS65060M20	FL-4L	2.36	1.75		1.740	3.480	TF-73	S-412





*Left hand quoted on request.

American Standard Buttress Thread Designations





- When only the designation BUTT is used, the thread is a "pull" type buttress (external thread pulls) with the clearance flank (45°) leading and the pressure flank (7°) following.
- When the designation PUSH-BUTT is used, the thread is a push type buttress (external thread pushes) with the load flank (7°) leading and the 45° clearance flank following.
- Whenever possible this description should be confirmed by a simplified view showing thread angles on the drawing of the product that has the buttress thread.
- Always remember that the position of your holder and direction of your feed will determine the lead angle on the insert.

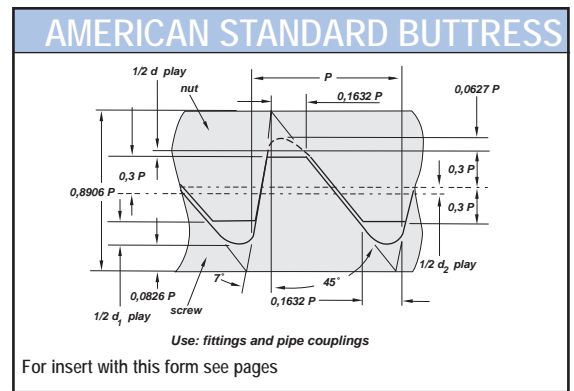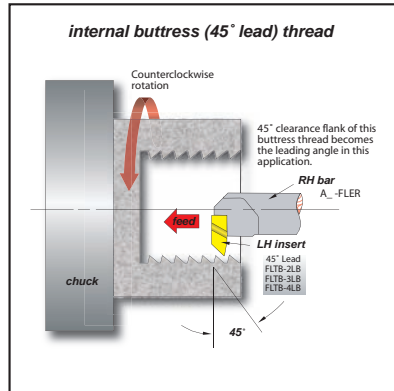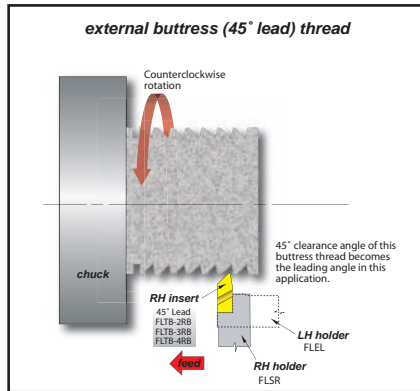

Feed direction towards the chuck



Feed direction towards the tailstock





Threading Limits with Standard Flo-Lock Inserts

The following charts list the largest pitch that can be applied on internal applications for Acme and V-Threading Flo-Lock inserts in sizes 2,3, 4 and 6. For Buttress threads, please see previous page.

60° V-Threading Limits


FLT-2 Inserts internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
6	1-7/8	1.695
7	1-3/4	1.595
8	1-5/8	1.490
9	1-9/16	1.442
10	1-1/2	1.392
11	1-7/16	1.339
12	1-3/8	1.285
13	1-5/16	1.229
14	1-1/4	1.173
16	1-1/4	1.182
18	1-1/8	1.065
20	1-1/8	1.071
24	1-1/16	1.017

* 24 TPI and finer can be cut with a #2 series insert provided that the minor diameter is 1.000 or larger.


Acme Threading Limits

FLA-2 internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
6	2-1/2	2.333
8	2-1/4	2.125
10	2	1.900
12	1-3/4	1.667
14	1-5/8	1.554
16*	1-1/2	1.438

*16 pitch acme threads and finer can be cut provided the minor diameter is 1.438 or larger.

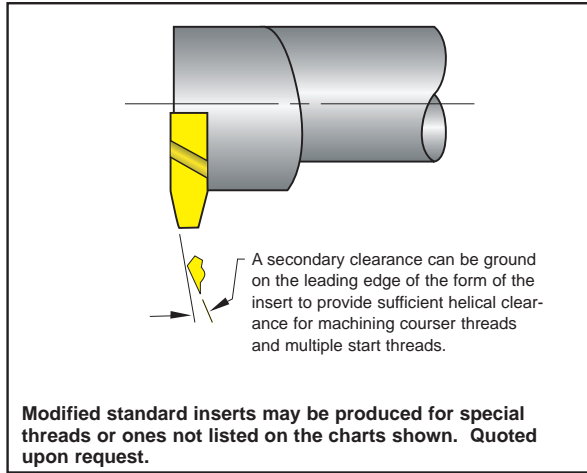


FLO-LOCK

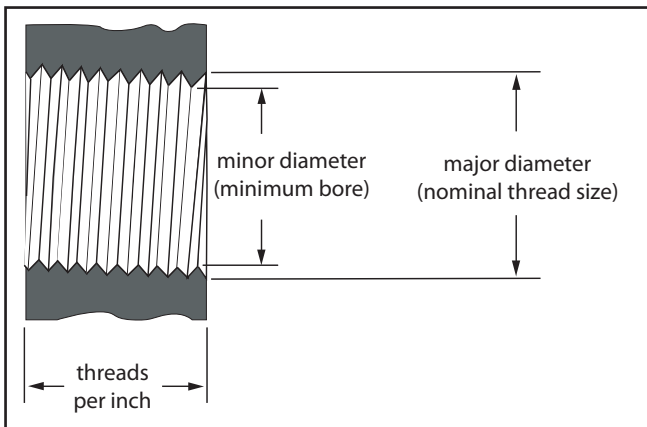

FLA-3, 4 & 6 internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
2**	5	4.500
2-1/2**	4-1/2	4.100
3**	4	3.665
4	3-1/2	3.250
5	3	2.800
6	2-1/2	2.333
8	2-1/4	2.125
10	2	1.900
12	1-3/4	1.667
14	1-5/8	1.554
16*	1-1/2	1.438

*16 pitch acme threads and finer can be cut provided the minor diameter is 1.438 or larger. **FLA-6 only.

NOTE: Positive rake acme inserts are recommended for stainless steels and high-temp alloy applications. Quoted upon request.

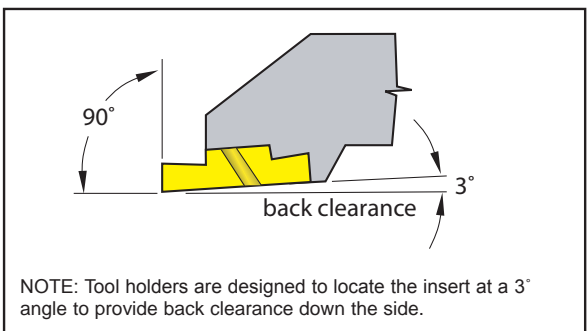

FLT-3 & 4 Inserts internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
4**	3	2.729
4-1/2**	2-7/8	2.634
5	2-3/4	2.534
6	2-1/2	2.320
7	2-1/4	2.095
8	2	1.865
9	1-15/16	1.817
10	1-7/8	1.767
11	1-13/16	1.714
12	1-3/4	1.660
13	1-5/8	1.542
14	1-9/16	1.485
16*	1-7/16	1.370

*16 pitch V threads and finer can be cut provided the minor diameter is 1.370 or larger. **FLT-4 only.

FLT-2A & 2B internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
8	1-3/4	1.600
10	1-5/8	1.505
12	1-1/2	1.400
16	1-1/4	1.175
20	1-1/16	1.002

FLT-3A & 4A internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
4*	2-1/2	2.200
5	2-1/4	2.010
6	2	1.800
8	1-3/4	1.600
10	1-5/8	1.505
12**	1-1/2	1.400


* FLT-4A insert only
** Sixteen or 20 threads per inch can be cut providing minor diameter is 1.375 or larger.

FLT-3B & 4B internal threading limitations		
threads per inch	nominal thread size	minimum minor diameter
4	*2-7/8	2.575
5	2-3/4	2.510
6	2-3/8	1.175
8	2-1/8	1.975
10	1-7/8	1.755
12	1-5/8	1.525
16	1-1/2	1.407
20	1-7/16	1.378

* FLT-4B insert only



TOOL-FLO

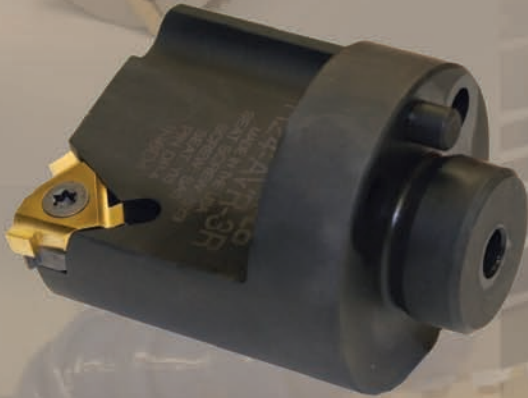

TOOL-FLO
CR-SB75-4E
TF22675 G50

TOOL-FLO
CR-SH 3E
TF 33411

TOOL-FLO
CR-SH 3E
TF 33411




LAYDOWN

Threading & Grooving


LAYDOWN




LT Style Laydown Insert Nomenclature Chart

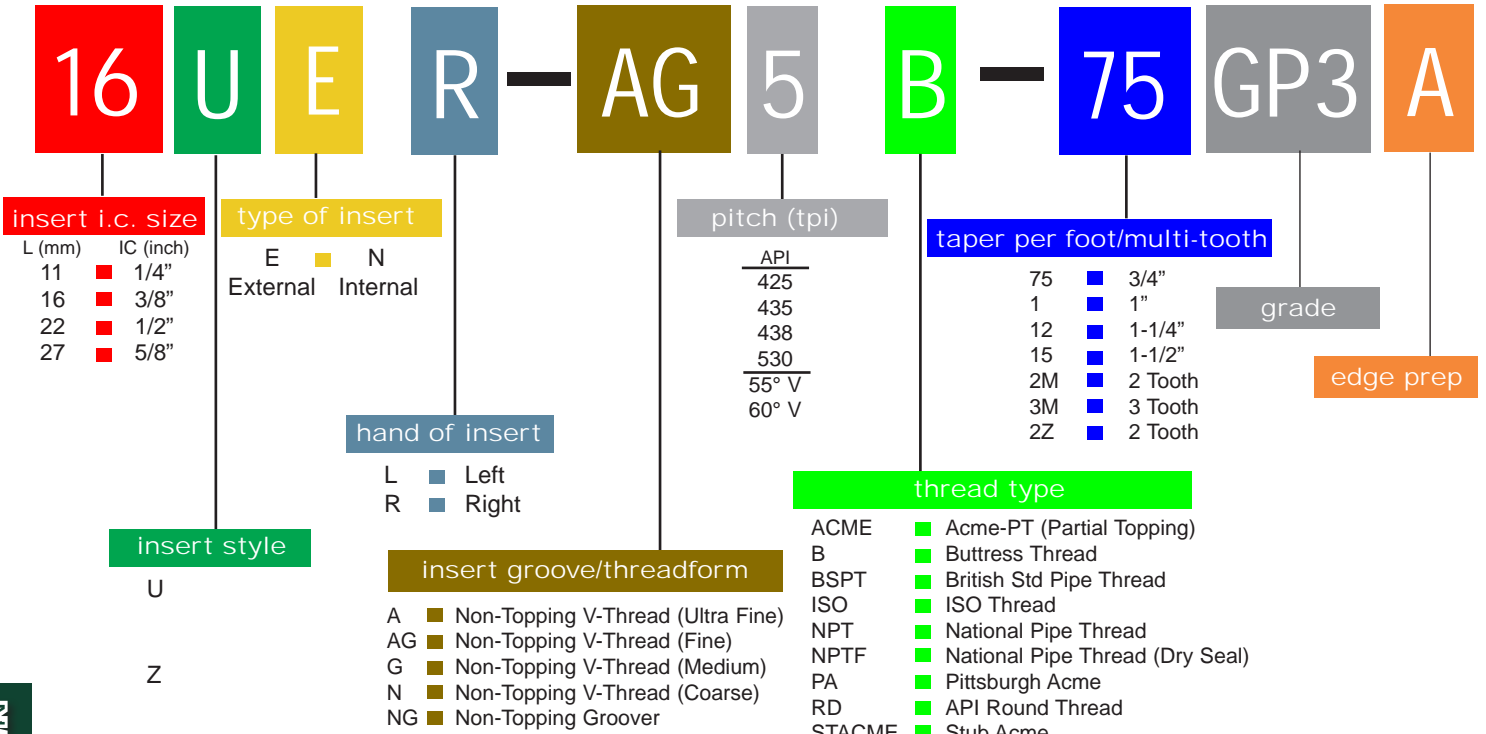

External Toolholder Nomenclature Chart

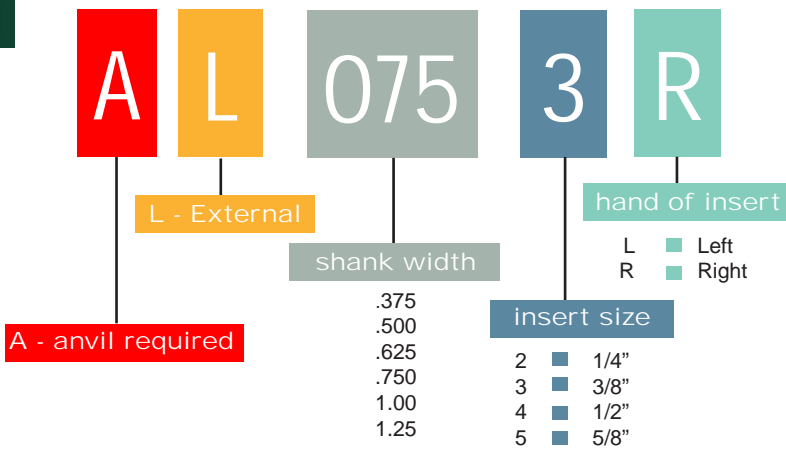

Internal Bar Nomenclature Chart

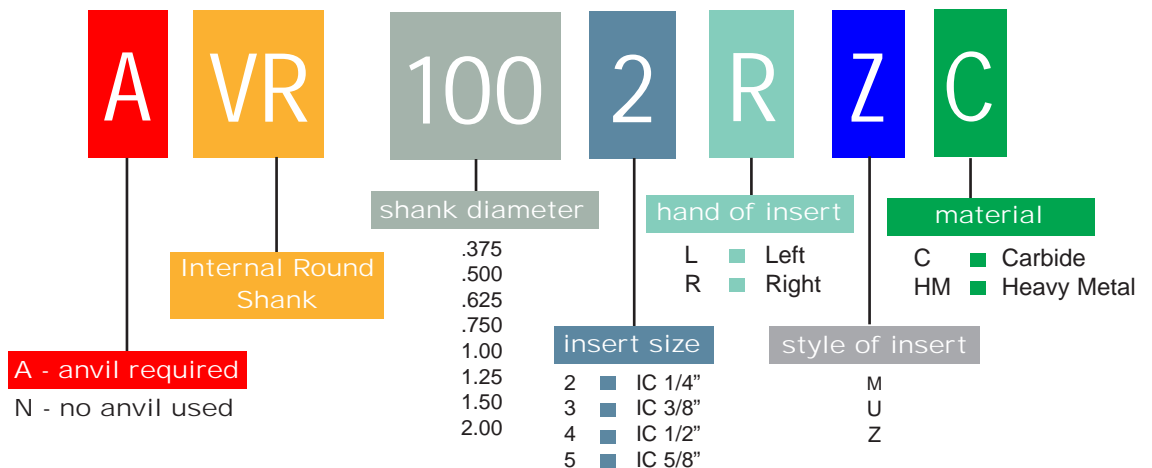




LAYDOWN

ACME

16, 22 & 27NR/ER - 3/8", 1/2", 5/8" I.C.




EXT RH SHOWN
INT OPPOSITE



Description	EDP Code	TPI	W	IC	L	M	K	TIN Coated		A11N Coated		
								GP22	GP50	AC22	AC3	AC50
16ER 16ACME-PT	5006216PT	16	.0206	3/8	.63	.04	.04	●	●	●	●	●
16EL 16ACME-PT	5046216PT	16	.0206	3/8	.63	.04	.04	●	●	●	●	●
16ER 14ACME-PT	5006214PT	14	.0239	3/8	.63	.05	.04	●	●	●	●	●
16EL 14ACME-PT	5046214PT	14	.0239	3/8	.63	.05	.04	●	●	●	●	●
16ER 12ACME-PT	5006212PT	12	.0283	3/8	.63	.05	.04	●	●	●	●	●
16EL 12ACME-PT	5046212PT	12	.0283	3/8	.63	.05	.04	●	●	●	●	●
16ER 10ACME-PT	5006210PT	10	.0319	3/8	.63	.06	.05	●	●	●	●	●
16EL 10ACME-PT	5046210PT	10	.0319	3/8	.63	.06	.05	●	●	●	●	●
16ER 8ACME-PT	5006208PT	8	.0411	3/8	.63	.06	.06	●	●	●	●	●
16EL 8ACME-PT	5046208PT	8	.0411	3/8	.63	.06	.06	●	●	●	●	●
22ER 6ACME-PT	5106206PT	6	.0566	1/2	.87	.08	.07	●	●	●	●	●
22EL 6ACME-PT	5146206PT	6	.0566	1/2	.87	.08	.07	●	●	●	●	●
22ER 5ACME-PT	5106205PT	5	.0689	1/2	.87	.09	.08	●	●	●	●	●
22EL 5ACME-PT	5146205PT	5	.0689	1/2	.87	.09	.08	●	●	●	●	●
27ER 4ACME-PT	5206204PT	4	.0875	5/8	1.06	.11	.09	●	●	●	●	●
27EL 4ACME-PT	5246204PT	4	.0875	5/8	1.06	.11	.09	●	●	●	●	●
16NR 16ACME-PT	5026216PT	16	.0206	3/8	.63	.04	.04	●	●	●	●	●
16NL 16ACME-PT	5066216PT	16	.0206	3/8	.63	.04	.04	●	●	●	●	●
16NR 14ACME-PT	5026214PT	14	.0239	3/8	.63	.05	.04	●	●	●	●	●
16NL 14ACME-PT	5066214PT	14	.0239	3/8	.63	.05	.04	●	●	●	●	●
16NR 12ACME-PT	5026212PT	12	.0283	3/8	.63	.05	.05	●	●	●	●	●
16NL 12ACME-PT	5066212PT	12	.0283	3/8	.63	.05	.05	●	●	●	●	●
16NR 10ACME-PT	5026210PT	10	.0319	3/8	.63	.05	.05	●	●	●	●	●
16NL 10ACME-PT	5066210PT	10	.0319	3/8	.63	.05	.05	●	●	●	●	●
16NR 8ACME-PT	5026208PT	8	.0411	3/8	.63	.06	.06	●	●	●	●	●
16NL 8ACME-PT	5066208PT	8	.0411	3/8	.63	.06	.06	●	●	●	●	●
22NR 6ACME-PT	5126206PT	6	.0566	1/2	.87	.08	.07	●	●	●	●	●
22NL 6ACME-PT	5166206PT	6	.0566	1/2	.87	.08	.07	●	●	●	●	●
22NR 5ACME-PT	5126205PT	5	.0689	1/2	.87	.09	.08	●	●	●	●	●
22NL 5ACME-PT	5166205PT	5	.0689	1/2	.87	.09	.08	●	●	●	●	●
27NR 4ACME-PT	5226204PT	4	.0875	5/8	1.06	.10	.09	●	●	●	●	●
27NL 4ACME-PT	5266204PT	4	.0875	5/8	1.06	.10	.09	●	●	●	●	●

ACME STUB

16, 22 & 27NR/ER - 3/8", 1/2", 5/8" I.C.



EXT RH SHOWN
INT OPPOSITE



Description	EDP Code	TPI	W	IC	L	M	K	TIN Coated		A11N Coated		
								GP22	GP50	AC22	AC3	AC50
16ER 16STACME-PT	5006416PT	16	.0238	3/8	.63	.04	.04	●	●	●	●	●
16EL 16STACME-PT	5046416PT	16	.0238	3/8	.63	.04	.04	●	●	●	●	●
16ER 14STACME-PT	5006414PT	14	.0276	3/8	.63	.04	.04	●	●	●	●	●
16EL 14STACME-PT	5046414PT	14	.0276	3/8	.63	.04	.04	●	●	●	●	●
16ER 12STACME-PT	5006412PT	12	.0326	3/8	.63	.05	.05	●	●	●	●	●
16EL 12STACME-PT	5046412PT	12	.0326	3/8	.63	.05	.05	●	●	●	●	●
16ER 10STACME-PT	5006410PT	10	.0370	3/8	.63	.05	.05	●	●	●	●	●
16EL 10STACME-PT	5046410PT	10	.0370	3/8	.63	.05	.05	●	●	●	●	●
16ER 8STACME-PT	5006408PT	8	.0476	3/8	.63	.06	.06	●	●	●	●	●
16EL 8STACME-PT	5046408PT	8	.0476	3/8	.63	.06	.06	●	●	●	●	●
22ER 6STACME-PT	5106406PT	6	.0652	1/2	.87	.07	.07	●	●	●	●	●
22EL 6STACME-PT	5146406PT	6	.0652	1/2	.87	.07	.07	●	●	●	●	●
22ER 5STACME-PT	5106405PT	5	.0793	1/2	.87	.08	.08	●	●	●	●	●
22EL 5STACME-PT	5146405PT	5	.0793	1/2	.87	.08	.08	●	●	●	●	●
27ER 4STACME-PT	5206404PT	4	.1004	5/8	1.06	.09	.11	●	●	●	●	●
27EL 4STACME-PT	5246404PT	4	.1004	5/8	1.06	.09	.11	●	●	●	●	●
16NR 16STACME-PT	5026416PT	16	.0238	3/8	.63	.04	.04	●	●	●	●	●
16NL 16STACME-PT	5066416PT	16	.0238	3/8	.63	.04	.04	●	●	●	●	●
16NR 14STACME-PT	5026414PT	14	.0276	3/8	.63	.04	.04	●	●	●	●	●
16NL 14STACME-PT	5066414PT	14	.0276	3/8	.63	.04	.04	●	●	●	●	●
16NR 12STACME-PT	5026412PT	12	.0326	3/8	.63	.05	.04	●	●	●	●	●
16NL 12STACME-PT	5066412PT	12	.0326	3/8	.63	.05	.04	●	●	●	●	●
16NR 10STACME-PT	5026410PT	10	.0370	3/8	.63	.05	.05	●	●	●	●	●
16NL 10STACME-PT	5066410PT	10	.0370	3/8	.63	.05	.05	●	●	●	●	●
16NR 8STACME-PT	5026408PT	8	.0476	3/8	.63	.06	.06	●	●	●	●	●
16NL 8STACME-PT	5066408PT	8	.0476	3/8	.63	.06	.06	●	●	●	●	●
22NR 6STACME-PT	5126406PT	6	.0652	1/2	.87	.07	.07	●	●	●	●	●
22NL 6STACME-PT	5166406PT	6	.0652	1/2	.87	.07	.07	●	●	●	●	●
22NR 5STACME-PT	5126405PT	5	.0793	1/2	.87	.09	.08	●	●	●	●	●
22NL 5STACME-PT	5166405PT	5	.0793	1/2	.87	.09	.08	●	●	●	●	●
27NR 4STACME-PT	5226404PT	4	.1004	5/8	1.06	.09	.09	●	●	●	●	●
27NL 4STACME-PT	5266404PT	4	.1004	5/8	1.06	.09	.09	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	▲	●	●	●
Non-Ferrous	▲	●	●	●
Stainless/High Temp	▲	●	●	●
Steel	▲	●	●	●

LAYDOWN



API BUTTRESS 22NR/ER - 1/2" I.C.

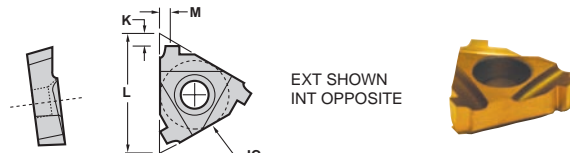

Description	EDP Code	TPI	TPF	IC	L	M	K	Conn. No.	TIN Coated		A1TIN Coated		
									GP22	GP50	AC22	AC3	AC50
22ER 8B75	5102100	8	3/4	1/2	.87	.102	.073	U.S. Improved Buttress	●	●	●	●	●
22ER 5B75	5101600	5	3/4	1/2	.87	.087	.087	4-1/2 - 13-3/8	●	●	●	●	●
22ER 5B1	5101700	5	1	1/2	.87	.095	.087	16 and larger	●	●	●	●	●
22NR 8B75	5122100	8	3/4	1/2	.87	.102	.073	U.S. Improved Buttress	●	●	●	●	●
22NR 5B75	5121600	5	3/4	1/2	.87	.081	.087	4-1/2 - 13-3/8	●	●	●	●	●
22NR 5B1	5121700	5	1	1/2	.87	.081	.090	16 and larger	●	●	●	●	●

API ROTARY SHOULDER CONNECTION 22 & 27NR/ER - 1/2" & 5/8" I.C.



Description	EDP Code	TPI	TPF	IC	L	M	K	Conn. No.	TIN Coated		A1TIN Coated		
									GP22	GP50	AC22	AC3	AC50
22ER 530	5101300	5	3	1/2	.87	.10	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.	●	●	●	●	●
22ER 4PAC	5101500	4	1-1/2	1/2	.87	.11	.08	American Open Hole	●	●	●	●	●
22ER 438	5101200	4	3	1/2	.87	.11	.11	NC56 - NC71	●	●	●	●	●
22ER 435	5101100	4	3	1/2	.87	.11	.08	5-1/2, 7-5/8, 8-5/8 Reg.	●	●	●	●	●
22ER 42F*	5101400	4	2	1/2	.87	.11	.08	VO.065*	●	●	●	●	●
22ER 428	5101000	4	2	1/2	.87	.10	.08	NC23-NC50, 2-3/8 - 5-1/2IF	●	●	●	●	●
22ER 425	5100900	4	2	1/2	.87	.10	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.	●	●	●	●	●
22NR 530	5121300	5	3	1/2	.87	.10	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.	●	●	●	●	●
22NR 4PAC	5121500	4	1-1/2	1/2	.87	.11	.08	American Open Hole	●	●	●	●	●
22NR 438	5121200	4	3	1/2	.87	.11	.11	NC56 - NC71	●	●	●	●	●
22NR 435	5121100	4	3	1/2	.87	.11	.08	5-1/2, 7-5/8, 8-5/8 Reg.	●	●	●	●	●
22NR 42F*	5121400	4	2	1/2	.87	.11	.08	VO.065*	●	●	●	●	●
22NR 428	5121000	4	2	1/2	.87	.10	.08	NC23-NC50, 2-3/8 - 5-1/2IF	●	●	●	●	●
22NR 425	5120900	4	2	1/2	.87	.10	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.	●	●	●	●	●
27ER 530	5201300	5	3	5/8	.126	.11	.07	3-1/2FH, 2-3/8, 4-1/2 Reg.	●	●	●	●	●
27ER 438	5201200	4	3	5/8	.126	.11	.08	NC56 - NC71	●	●	●	●	●
27ER 435	5201100	4	3	5/8	.126	.12	.08	5-1/2, 7-5/8, 8-5/8 Reg.	●	●	●	●	●
27ER 428	5201000	4	2	5/8	.126	.11	.08	NC23-NC50, 2-3/8 - 5-1/2IF	●	●	●	●	●
27ER 425	5200900	4	2	5/8	.126	.12	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.	●	●	●	●	●
27NR 530	5221300	5	3	5/8	.126	.11	.08	3-1/2FH, 2-3/8, 4-1/2 Reg.	●	●	●	●	●
27NR 438	5221200	4	3	5/8	.126	.11	.08	NC56 - NC71	●	●	●	●	●
27NR 435	5221100	4	3	5/8	.126	.12	.08	5-1/2, 7-5/8, 8-5/8 Reg.	●	●	●	●	●
27NR 428	5221000	4	2	5/8	.126	.11	.08	NC23-NC50, 2-3/8 - 5-1/2IF	●	●	●	●	●
27NR 425	5220900	4	2	5/8	.126	.12	.08	5-1/2, 6-5/8FH, 6-5/8 Reg.	●	●	●	●	●

* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API ROUND 16NR/ER - 3/8" I.C. w/patented chipbreaker

Exclusive patented chipbreaker!



Description	EDP Code	TPI	IC	L	M	K	Uncoated		TIN Coated		A1TIN Coated		
							C22	GP22	GP50	AC22	AC3	AC50	
16ER 8RD-CB	5003200HC	8	3/8	.63	.051	.059	●	●	●	●	●	●	●
16ER 10RD-CB	5003400HC	10	3/8	.63	.047	.059	●	●	●	●	●	●	●
16NR 8RD-CB	5023200HC	8	3/8	.63	.051	.059	●	●	●	●	●	●	●
16NR 10RD-CB	5023400HC	10	3/8	.63	.047	.059	●	●	●	●	●	●	●

API ROUND 16 & 22NR/ER - 3/8" & 1/2" I.C.



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		A1TIN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 8RD	5003200	8	3/8	.65	.059	.056	●	●	●	●	●
16ER 10RD	5003400	10	3/8	.65	.059	.056	●	●	●	●	●
22ER 8RD	5103200	8	1/2	.87	.060	.056	●	●	●	●	●
22ER 10RD	5103400	10	1/2	.87	.046	.048	●	●	●	●	●
16NR 8RD	5023200	8	3/8	.65	.059	.056	●	●	●	●	●
16NR 10RD	5023400	10	3/8	.65	.059	.056	●	●	●	●	●
22NR 8RD	5123200	8	1/2	.87	.060	.056	●	●	●	●	●
22NR 10RD	5123400	10	1/2	.87	.046	.048	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	GP22	GP50	AC22	AC3	AC50
Cast Iron	●	●	●	●	●
Non-Ferrous	●	●	●	●	●
Stainless/High Temp	●	●	●	●	●
Steel	●	●	▲	●	●




LAYDOWN

API ROUND

22 & 27NR/ER - 1/2" & 5/8" I.C.

Multi-tooth

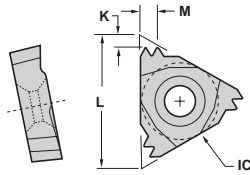

EXT RH SHOWN
INT OPPOSITE




Description	EDP Code	TPI	IC	L	M	K	Coating							
							GP22	GP50	AC22	AC3	AC50			
27ER 8RD2M	5203300	8	5/8	1.08	.177	.114	●	●	●	●	●	●	●	●
22ER 10RD2M	5103500	10	1/2	0.87	.146	.094	●	●	●	●	●	●	●	●
27NR 8RD2M	5223300	8	5/8	1.08	.177	.114	●	●	●	●	●	●	●	●
22NR 10RD2M	5123500	10	1/2	0.87	.146	.094	●	●	●	●	●	●	●	●

API VO.055

American MT, AMT, AMMT*

16 & 22NR/ER - 3/8" & 1/2" I.C.



EXT RH SHOWN
INT OPPOSITE




Description	EDP Code	TPI	TPF	IC	L	M	K	Connection	Coating					
									GP22	GP50	AC22	AC3	AC50	
16ER 6P VO.055 MT	5004300	6	1-1/2	3/8	.65	.059	.051	NC10-NC16, VO.055, 1, 1-1/2 REG	●	●	●	●	●	●
22ER 6P VO.055 MT	5104300	6	1-1/2	1/2	.87	.072	.060	NC10-NC16, VO.055, 1, 1-1/2 REG	●	●	●	●	●	●
16NR 6P VO.055 MT	5024300	6	1-1/2	3/8	.65	.059	.051	NC10-NC16, VO.055, 1, 1-1/2 REG	●	●	●	●	●	●
22NR 6P VO.055 MT	5124300	6	1-1/2	1/2	.87	.072	.060	NC10-NC16, VO.055, 1, 1-1/2 REG	●	●	●	●	●	●

* MT is Macaroni Tubing, AMT is American Macaroni Tubing and AMMT is American Mining Macaroni Tubing.

API VAM

22NR/ER - 1/2" I.C.

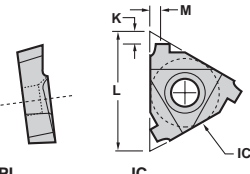


EXT RH SHOWN
INT OPPOSITE




Description	EDP Code	TPI	IC	L	M	K	Coating						
							GP22	GP50	AC22	AC3	AC50		
22ER 8VAM	5102500	8	1/2	.87	.059	.059	●	●	●	●	●	●	●
22ER 6VAM	5102400	6	1/2	.87	.079	.079	●	●	●	●	●	●	●
22ER 5VAM	5102300	5	1/2	.87	.079	.079	●	●	●	●	●	●	●
22NR 8VAM	5122500	8	1/2	.87	.059	.059	●	●	●	●	●	●	●
22NR 6VAM	5122400	6	1/2	.87	.079	.079	●	●	●	●	●	●	●
22NR 5VAM	5122300	5	1/2	.87	.079	.079	●	●	●	●	●	●	●

API X-LINE

22NR/ER - 1/2" I.C.

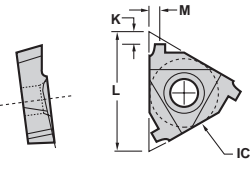

EXT RH SHOWN




Description	EDP Code	TPI	TPF	IC	L	M	K	Conn. No.	Coating				
									GP22	GP50	AC22	AC3	AC50
22ER 6XL75	5102000	6	3/4	1/2	.87	.075	.078		●	●	●	●	●
22ER 6XL15	5101900	6	1-1/2	1/2	.87	.075	.086	5 - 7-5/8	●	●	●	●	●
22ER 5XL12	5101800	5	1-1/4	1/2	.87	.087	.083	8-5/8 - 10-3/4	●	●	●	●	●
22NR 6XL75	5122000	6	3/4	1/2	.87	.075	.078		●	●	●	●	●
22NR 6XL15	5121900	6	1-1/2	1/2	.87	.075	.086	5 - 7-5/8	●	●	●	●	●
22NR 5XL12	5121800	5	1-1/4	1/2	.87	.087	.083	8-5/8 - 10-3/4	●	●	●	●	●

BSPT

16NR/ER - 3/8" I.C.

55° w/patented chipbreaker

Exclusive patented chipbreaker!

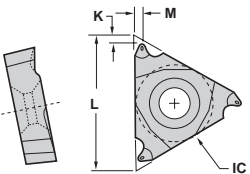

EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	Coating						
							GP22	GP50	AC22	AC3	AC50		
16ER 28BSPT-CB	5004428HC	28	3/8	.63	.031	.028	●	●	●	●	●	●	●
16ER 19BSPT-CB	5004419HC	19	3/8	.63	.031	.028	●	●	●	●	●	●	●
16ER 14BSPT-CB	5004414HC	14	3/8	.63	.059	.059	●	●	●	●	●	●	●
16ER 11BSPT-CB	5004411HC	11	3/8	.63	.059	.059	●	●	●	●	●	●	●
16NR 28BSPT-CB	5024428HC	28	3/8	.63	.031	.031	●	●	●	●	●	●	●
16NR 19BSPT-CB	5024419HC	19	3/8	.63	.031	.031	●	●	●	●	●	●	●
16NR 14BSPT-CB	5024428HC	14	3/8	.63	.031	.031	●	●	●	●	●	●	●
16NR 11BSPT-CB	5024419HC	11	3/8	.63	.031	.031	●	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	GP22	GP50	AC22	AC3	AC50
Cast Iron	●	●	●	●	●
Non-Ferrous	●	●	●	●	●
Stainless/High Temp	●	●	●	●	●
Steel	●	●	●	●	●

LAYDOWN



GROOVING 16NR/ER - 3/8" I.C.



EXT RH SHOWN




Description	EDP Code	IC	W	D	L	TIN Coated		AlTiN Coated		
						GP22	GP50	AC22	AC3	AC50
16ER NG W.031	5007431	3/8	.031	.050	.63	●	●			●
16EL NG W.031	5047431	3/8	.031	.050	.63	●				
16ER NG W.047	5007447	3/8	.047	.070	.63	●	●			●
16EL NG W.047	5047447	3/8	.047	.070	.63	●				
16ER NG W.062	5007462	3/8	.062	.080	.63	●	●			●
16EL NG W.062	5047462	3/8	.062	.080	.63	●				
16ER NG W.093	5007493	3/8	.093	.070	.63	●	●			●
16EL NG W.093	5047493	3/8	.093	.070	.63	●				
16ER NG W.125	5007625	3/8	.125	.045	.63	●	●			●
16EL NG W.125	5047625	3/8	.125	.045	.63	●				
16NR NG W.031	5027431	3/8	.031	.050	.63	●	●			●
16NL NG W.031	5067431	3/8	.031	.050	.63	●				
16NR NG W.047	5027447	3/8	.047	.070	.63	●	●			●
16NL NG W.047	5067447	3/8	.047	.070	.63	●				
16NR NG W.062	5027462	3/8	.062	.080	.63	●	●			●
16NL NG W.062	5067462	3/8	.062	.080	.63	●				
16NR NG W.093	5027493	3/8	.093	.070	.63	●	●			●
16NL NG W.093	5067493	3/8	.093	.070	.63	●				
16NR NG W.125	5027625	3/8	.125	.045	.63	●	●			●
16NL NG W.125	5067625	3/8	.125	.045	.63	●				

LAYDOWN

ISO 16NR/ER - 3/8" I.C. w/patented chipbreaker

Exclusive patented chipbreaker!



EXT RH SHOWN



Description	EDP Code	Pitch	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16NR 0.75ISO-CB	50242075HC	0,75	3/8	.63	.02	.04	●	●	●	●	●
16NR 1.0ISO-CB	5024201HC	1,00	3/8	.63	.03	.03	●	●	●	●	●
16NR 1.25ISO-CB	502420125HC	1,25	3/8	.63	.03	.03	●	●	●	●	●
16NR 1.5ISO-CB	50242015HC	1,50	3/8	.63	.03	.03	●	●	●	●	●
16NR 1.75ISO-CB	502420175HC	1,75	3/8	.63	.06	.04	●	●	●	●	●
16NR 2.0ISO-CB	5024202HC	2,00	3/8	.63	.06	.04	●	●	●	●	●
16NR 2.5ISO-CB	50242025HC	2,50	3/8	.63	.06	.04	●	●	●	●	●
16NR 3.0ISO-CB	5024203HC	3,00	3/8	.63	.06	.04	●	●	●	●	●
16ER 0.75ISO-CB	50042075HC	0,75	3/8	.63	.02	.04	●	●	●	●	●
16ER 1.0ISO-CB	5004201HC	1,00	3/8	.63	.03	.03	●	●	●	●	●
16ER 1.25ISO-CB	500420125HC	1,25	3/8	.63	.03	.03	●	●	●	●	●
16ER 1.5ISO-CB	50042015HC	1,50	3/8	.63	.03	.03	●	●	●	●	●
16ER 1.75ISO-CB	500420175HC	1,75	3/8	.63	.06	.04	●	●	●	●	●
16ER 2.0ISO-CB	5004202HC	2,00	3/8	.63	.06	.04	●	●	●	●	●
16ER 2.5ISO-CB	50042025HC	2,50	3/8	.63	.06	.04	●	●	●	●	●
16ER 3.0ISO-CB	5004203HC	3,00	3/8	.63	.06	.04	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron					●
Non-Ferrous					
Stainless/High Temp					●
Steel	▲				●



LAYDOWN


ISO 11, 16, 22 & 27NR/ER - 1/4", 3/8", 1/2" & 5/8" I.C.



Description	EDP Code	Pitch	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
11NR 0.5ISO	4924205	0,50	1/4	.43	.02	.015	●	●	●	●	●
11NR 0.75ISO	49242075	0,75	1/4	.43	.02	.02	●	●	●	●	●
11NR 1.0ISO	4924210	1,0	1/4	.43	.03	.03	●	●	●	●	●
16NR 1.0ISO	5024201	1,0	3/8	.63	.03	.02	●	●	●	●	●
16NR 1.5ISO	50242015	1,5	3/8	.63	.04	.03	●	●	●	●	●
16NR 2.0ISO	5024202	2,0	3/8	.63	.05	.04	●	●	●	●	●
22NR 3.5ISO	51242035	3,5	1/2	.87	.09	.06	●	●	●	●	●
22NR 4.0ISO	5124204	4,0	1/2	.87	.09	.06	●	●	●	●	●
22NR 5.0ISO	5124205	5,0	1/2	.87	.09	.06	●	●	●	●	●
27NR 5.5ISO	52242055	5,5	5/8	1.06	.09	.06	●	●	●	●	●
27NR 6.0ISO	5224206	6,0	5/8	1.06	.10	.07	●	●	●	●	●
11ER 0.5ISO	4904205	0,50	1/4	.43	.02	.02	●	●	●	●	●
11ER 0.75ISO	49042075	0,75	1/4	.43	.02	.02	●	●	●	●	●
11ER 1.0ISO	4904210	1,0	1/4	.43	.03	.02	●	●	●	●	●
16ER 1.0ISO	5004201	1,0	3/8	.63	.03	.03	●	●	●	●	●
16ER 1.5ISO	50042015	1,5	3/8	.63	.04	.03	●	●	●	●	●
16ER 2.0ISO	5004202	2,0	3/8	.63	.05	.04	●	●	●	●	●
22ER 3.5ISO	50042035	3,5	1/2	.87	.09	.06	●	●	●	●	●
22ER 4.0ISO	5104204	4,0	1/2	.87	.09	.07	●	●	●	●	●
22ER 5.0ISO	5104205	5,0	1/2	.87	.10	.07	●	●	●	●	●
27ER 5.5ISO	52042055	5,5	5/8	1.06	.11	.07	●	●	●	●	●
27ER 6.0ISO	5204206	6,0	5/8	1.06	.11	.08	●	●	●	●	●


NPT 16NR/ER - 3/8" I.C. w/patented chipbreaker

Exclusive patented chipbreaker!



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 27NPT-CB	5003627HC	27	3/8	.63	.03	.02	●	●	●	●	●
16ER 18NPT-CB	5003618HC	18	3/8	.63	.03	.02	●	●	●	●	●
16ER 14NPT-CB	5003614HC	14	3/8	.63	.06	.04	●	●	●	●	●
16ER 11.5NPT-CB	5003611HC	11.5	3/8	.63	.06	.04	●	●	●	●	●
16ER 8NPT-CB	5003608HC	8	3/8	.63	.06	.04	●	●	●	●	●
16NR 27NPT-CB	5023627HC	27	3/8	.63	.03	.02	●	●	●	●	●
16NR 18NPT-CB	5023618HC	18	3/8	.63	.03	.02	●	●	●	●	●
16NR 14NPT-CB	5023614HC	14	3/8	.63	.06	.04	●	●	●	●	●
16NR 11.5NPT-CB	5023611HC	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NR 8NPT-CB	5023608HC	8	3/8	.63	.06	.04	●	●	●	●	●

NPT 11 & 16NR/ER - 1/4" & 3/8" I.C.



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 27NPT	5003627	27	3/8	.63	.03	.03	●	●	●	●	●
16EL 27NPT	5043627	27	3/8	.63	.03	.03	●	●	●	●	●
16ER 18NPT	5003618	18	3/8	.63	.04	.03	●	●	●	●	●
16EL 18NPT	5043618	18	3/8	.63	.04	.03	●	●	●	●	●
16ER 14NPT	5003614	14	3/8	.63	.05	.04	●	●	●	●	●
16EL 14NPT	5043614	14	3/8	.63	.05	.04	●	●	●	●	●
16ER 11.5NPT	5003611	11.5	3/8	.63	.06	.04	●	●	●	●	●
16EL 11.5NPT	5043611	11.5	3/8	.63	.06	.04	●	●	●	●	●
16ER 8NPT	5003608	8	3/8	.63	.07	.05	●	●	●	●	●
16EL 8NPT	5043608	8	3/8	.63	.07	.05	●	●	●	●	●
11NR 18NPT	4923618	18	1/4	.43	.04	.03	●	●	●	●	●
11NR 27NPT	4923627	27	1/4	.43	.03	.03	●	●	●	●	●
16NR 27NPT	5023627	27	3/8	.63	.03	.03	●	●	●	●	●
16NL 27NPT	5063627	27	3/8	.63	.03	.03	●	●	●	●	●
16NR 18NPT	5023618	18	3/8	.63	.04	.03	●	●	●	●	●
16NL 18NPT	5063618	18	3/8	.63	.04	.03	●	●	●	●	●
16NR 14NPT	5023614	14	3/8	.63	.05	.04	●	●	●	●	●
16NL 14NPT	5063614	14	3/8	.63	.05	.04	●	●	●	●	●
16NR 11.5NPT	5023611	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NL 11.5NPT	5063611	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NR 8NPT	5023608	8	3/8	.63	.06	.05	●	●	●	●	●
16NL 8NPT	5063608	8	3/8	.63	.06	.05	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	GP22	GP50	AC22	AC3	AC50
Cast Iron	▲	●	●	●	●
Non-Ferrous	▲	●	●	●	●
Stainless/High Temp	▲	●	●	●	●
Steel	▲	●	●	●	●


LAYDOWN




NPT

22 & 27NR/ER - 1/2" & 5/8" I.C.

Multi-tooth




EXT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	TIN Coated		A1TIN Coated		
							GP22	GP50	AC22	AC3	AC50
22ER 11.5NPT2M	5103811	11.5	1/2	0.87	.13	.09	●	●	●	●	●
27ER 11.5NPT3M	5203811	11.5	5/8	1.06	.22	.14	●	●	●	●	●
27ER 8NPT2M	5203808	8	5/8	1.06	.19	.11	●	●	●	●	●
22NR 11.5NPT2M	5123811	11.5	1/2	0.87	.13	.09	●	●	●	●	●
27NR 11.5NPT3M	5223811	11.5	5/8	1.06	.22	.14	●	●	●	●	●
27NR 8NPT2M	5223808	8	5/8	1.06	.19	.11	●	●	●	●	●

TRAPEZOIDAL

16NR/ER - 3/8" I.C.



EXT RH SHOWN




Description	EDP Code	Pitch	IC	L	M	K	TIN Coated		A1TIN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 1.5TR	5007015	1.5	3/8	.63	.04	.04	●	●	●	●	●
16ER 2.0TR	5007020	2.0	3/8	.63	.05	.04	●	●	●	●	●
16ER 3.0TR	5007030	3.0	3/8	.63	.06	.05	●	●	●	●	●
16NR 1.5TR	5027015	1.5	3/8	.63	.04	.04	●	●	●	●	●
16NR 2.0TR	5027020	2.0	3/8	.63	.05	.04	●	●	●	●	●
16NR 3.0TR	5027030	3.0	3/8	.63	.06	.05	●	●	●	●	●

NPTF DRY SEAL

16NR/ER - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!




EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		A1TIN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 27NPTF-CB	5004027HC	27	3/8	.63	.03	.03	●	●	●	●	●
16ER 18NPTF-CB	5004018HC	18	3/8	.63	.04	.03	●	●	●	●	●
16ER 14NPTF-CB	5004014HC	14	3/8	.63	.05	.04	●	●	●	●	●
16ER 11.5NPTF-CB	5004011HC	11.5	3/8	.63	.06	.04	●	●	●	●	●
16ER 8NPTF-CB	5004008HC	8	3/8	.63	.07	.05	●	●	●	●	●
16NR 27NPTF-CB	5024027HC	27	3/8	.63	.03	.03	●	●	●	●	●
16NR 18NPTF-CB	5024018HC	18	3/8	.63	.03	.02	●	●	●	●	●
16NR 14NPTF-CB	5024014HC	14	3/8	.63	.06	.04	●	●	●	●	●
16NR 11.5NPTF-CB	5024011HC	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NR 8NPTF-CB	5024008HC	8	3/8	.63	.06	.04	●	●	●	●	●

NPTF DRY SEAL

11 & 16NR/NL/ER/EL - 1/4" & 3/8" I.C.



EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		A1TIN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 27NPTF	5004027	27	3/8	.63	.03	.03	●	●	●	●	●
16EL 27NPTF	5043827	27	3/8	.63	.03	.03	●	●	●	●	●
16ER 18NPTF	5004018	18	3/8	.63	.04	.03	●	●	●	●	●
16EL 18NPTF	5043818	18	3/8	.63	.04	.03	●	●	●	●	●
16ER 14NPTF	5004014	14	3/8	.63	.05	.04	●	●	●	●	●
16EL 14NPTF	5043814	14	3/8	.63	.05	.04	●	●	●	●	●
16ER 11.5NPTF	5004011	11.5	3/8	.63	.06	.04	●	●	●	●	●
16EL 11.5NPTF	5043811	11.5	3/8	.63	.06	.04	●	●	●	●	●
16ER 8NPTF	5004008	8	3/8	.63	.07	.05	●	●	●	●	●
16EL 8NPTF	5043808	8	3/8	.63	.07	.05	●	●	●	●	●
11NR 27NPTF	4923827	27	1/4	.43	.03	.03	●	●	●	●	●
11NR 18NPTF	4924018	18	1/4	.43	.04	.03	●	●	●	●	●
16NR 27NPTF	5024027	27	3/8	.63	.03	.03	●	●	●	●	●
16NL 27NPTF	5063827	27	3/8	.63	.03	.03	●	●	●	●	●
16NR 18NPTF	5024018	18	3/8	.63	.04	.03	●	●	●	●	●
16NL 18NPTF	5063818	18	3/8	.63	.04	.03	●	●	●	●	●
16NR 14NPTF	5024014	14	3/8	.63	.05	.04	●	●	●	●	●
16NL 14NPTF	5063814	14	3/8	.63	.05	.04	●	●	●	●	●
16NR 11.5NPTF	5024011	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NL 11.5NPTF	5063811	11.5	3/8	.63	.06	.04	●	●	●	●	●
16NR 8NPTF	5024008	8	3/8	.63	.07	.05	●	●	●	●	●
16NL 8NPTF	5063808	8	3/8	.63	.07	.05	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Material	GP22	GP50	AC22	AC3	AC50
Cast Iron	▲	●	●	●	●
Non-Ferrous	▲	●	●	●	●
Stainless/High Temp	▲	●	●	●	●
Steel	▲	●	●	●	●




LAYDOWN

UN
16ER - 3/8" I.C.
 w/ patented chipbreaker

Exclusive patented chipbreaker!




EXT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated	
							GP22	GP50	AC22	AC3
16ER 32UN-CB	5006632HC	32	3/8	.63	.01	.05	●	●	●	●
16ER 28UN-CB	5006628HC	28	3/8	.63	.03	.03	●	●	●	●
16ER 24UN-CB	5006624HC	24	3/8	.63	.03	.03	●	●	●	●
16ER 20UN-CB	5006620HC	20	3/8	.63	.03	.03	●	●	●	●
16ER 18UN-CB	5006618HC	18	3/8	.63	.03	.03	●	●	●	●
16ER 16UN-CB	5006616HC	16	3/8	.63	.03	.03	●	●	●	●
16ER 14UN-CB	5006614HC	14	3/8	.63	.06	.05	●	●	●	●
16ER 13UN-CB	5006613HC	13	3/8	.63	.06	.05	●	●	●	●
16ER 12UN-CB	5006612HC	12	3/8	.63	.06	.05	●	●	●	●
16ER 10UN-CB	5006610HC	10	3/8	.63	.06	.05	●	●	●	●
16ER 8UN-CB	5006608HC	8	3/8	.63	.06	.05	●	●	●	●

UN
16 & 22ER/EL - 3/8" & 1/2" I.C.



EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated	
							GP22	GP50	AC22	AC3
16ER 32UN	5006632	32	3/8	.63	.02	.02	●	●	●	●
16EL 32UN	5046632	32	3/8	.63	.02	.02	●	●	●	●
16ER 28UN	5006628	28	3/8	.63	.03	.02	●	●	●	●
16EL 28UN	5046628	28	3/8	.63	.03	.02	●	●	●	●
16ER 24UN	5006624	24	3/8	.63	.03	.03	●	●	●	●
16EL 24UN	5046624	24	3/8	.63	.03	.03	●	●	●	●
16ER 20UN	5006620	20	3/8	.63	.04	.03	●	●	●	●
16EL 20UN	5046620	20	3/8	.63	.04	.03	●	●	●	●
16ER 18UN	5006618	18	3/8	.63	.04	.03	●	●	●	●
16EL 18UN	5046618	18	3/8	.63	.04	.03	●	●	●	●
16ER 16UN	5006616	16	3/8	.63	.04	.04	●	●	●	●
16EL 16UN	5046616	16	3/8	.63	.04	.04	●	●	●	●
16ER 14UN	5006614	14	3/8	.63	.05	.04	●	●	●	●
16EL 14UN	5046614	14	3/8	.63	.05	.04	●	●	●	●
16ER 13UN	5006613	13	3/8	.63	.05	.04	●	●	●	●
16EL 13UN	5046613	13	3/8	.63	.05	.04	●	●	●	●
16ER 12UN	5006612	12	3/8	.63	.06	.04	●	●	●	●
16EL 12UN	5046612	12	3/8	.63	.06	.04	●	●	●	●
16ER 11UN	5006611	11	3/8	.63	.06	.04	●	●	●	●
16EL 11UN	5046611	11	3/8	.63	.06	.04	●	●	●	●
16ER 10UN	5006610	10	3/8	.63	.06	.04	●	●	●	●
16EL 10UN	5046610	10	3/8	.63	.06	.04	●	●	●	●
16ER 9UN	5006609	9	3/8	.63	.07	.05	●	●	●	●
16EL 9UN	5046609	9	3/8	.63	.07	.05	●	●	●	●
16ER 8UN	5006608	8	3/8	.63	.06	.05	●	●	●	●
16EL 8UN	5046608	8	3/8	.63	.06	.05	●	●	●	●
22ER 7UN	5106607	7	1/2	.87	.09	.06	●	●	●	●
22EL 7UN	5146607	7	1/2	.87	.09	.06	●	●	●	●
22ER 6UN	5106606	6	1/2	.87	.09	.06	●	●	●	●
22EL 6UN	5146606	6	1/2	.87	.09	.06	●	●	●	●
22ER 5UN	5106605	5	1/2	.87	.10	.07	●	●	●	●
22EL 5UN	5146605	5	1/2	.87	.10	.07	●	●	●	●
27ER 4.5UN	52066045	4.5	5/8	1.06	.11	.07	●	●	●	●
27EL 4.5UN	52466045	4.5	5/8	1.06	.11	.07	●	●	●	●
27ER 4UN	5206604	4	5/8	1.06	.12	.08	●	●	●	●
27EL 4UN	5246604	4	5/8	1.06	.12	.08	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	▲			●
Non-Ferrous	▲			●
Stainless/High Temp	▲			●
Steel	▲			●


LAYDOWN

LAYDOWN




UN
16NR - 3/8" I.C.
 w/ patented chipbreaker

Exclusive patented chipbreaker!




INT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16NR 32UN-CB	5026632HC	32	3/8	.63	.02	.04	●	●	●	●	●
16NR 28UN-CB	5026628HC	28	3/8	.63	.03	.02	●	●	●	●	●
16NR 24UN-CB	5026624HC	24	3/8	.63	.03	.03	●	●	●	●	●
16NR 20UN-CB	5026620HC	20	3/8	.63	.03	.02	●	●	●	●	●
16NR 18UN-CB	5026618HC	18	3/8	.63	.03	.02	●	●	●	●	●
16NR 16UN-CB	5026616HC	16	3/8	.63	.03	.03	●	●	●	●	●
16NR 14UN-CB	5026614HC	14	3/8	.63	.05	.04	●	●	●	●	●
16NR 13UN-CB	5026613HC	13	3/8	.63	.05	.04	●	●	●	●	●
16NR 12UN-CB	5026612HC	12	3/8	.63	.05	.04	●	●	●	●	●
16NR 10UN-CB	5026610HC	10	3/8	.63	.05	.04	●	●	●	●	●
16NR 8UN-CB	5026608HC	8	3/8	.63	.05	.04	●	●	●	●	●

UN
11, 16, 22 & 27NR - 1/4", 3/8", 1/2" & 5/8" I.C.



INT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
11NR 32UN	4926632	32	1/4	.43	.02	.02	●	●	●	●	●
11NR 28UN	4926628	28	1/4	.43	.03	.02	●	●	●	●	●
11NR 24UN	4926624	24	1/4	.43	.03	.03	●	●	●	●	●
11NR 20UN	4926620	20	1/4	.43	.04	.03	●	●	●	●	●
11NR 18UN	4926618	18	1/4	.43	.04	.03	●	●	●	●	●
16NR 32UN	5026632	32	3/8	.63	.02	.02	●	●	●	●	●
16NL 32UN	5066632	32	3/8	.63	.02	.02	●	●	●	●	●
16NR 28UN	5026628	28	3/8	.63	.03	.02	●	●	●	●	●
16NL 28UN	5066628	28	3/8	.63	.03	.02	●	●	●	●	●
16NR 24UN	5026624	24	3/8	.63	.03	.03	●	●	●	●	●
16NL 24UN	5066624	24	3/8	.63	.03	.03	●	●	●	●	●
16NR 20UN	5026620	20	3/8	.63	.04	.03	●	●	●	●	●
16NL 20UN	5066620	20	3/8	.63	.04	.03	●	●	●	●	●
16NR 18UN	5026618	18	3/8	.63	.04	.03	●	●	●	●	●
16NL 18UN	5066618	18	3/8	.63	.04	.03	●	●	●	●	●
16NR 16UN	5026616	16	3/8	.63	.04	.04	●	●	●	●	●
16NL 16UN	5066616	16	3/8	.63	.04	.04	●	●	●	●	●
16NR 14UN	5026614	14	3/8	.63	.05	.04	●	●	●	●	●
16NL 14UN	5066614	14	3/8	.63	.05	.04	●	●	●	●	●
16NR 13UN	5026613	13	3/8	.63	.05	.04	●	●	●	●	●
16NL 13UN	5066613	13	3/8	.63	.05	.04	●	●	●	●	●
16NR 12UN	5026612	12	3/8	.63	.06	.04	●	●	●	●	●
16NL 12UN	5066612	12	3/8	.63	.06	.04	●	●	●	●	●
16NR 11UN	5026611	11	3/8	.63	.06	.04	●	●	●	●	●
16NL 11UN	5066611	11	3/8	.63	.06	.04	●	●	●	●	●
16NR 10UN	5026610	10	3/8	.63	.06	.04	●	●	●	●	●
16NL 10UN	5066610	10	3/8	.63	.06	.04	●	●	●	●	●
16NR 9UN	5026609	9	3/8	.63	.07	.05	●	●	●	●	●
16NL 9UN	5066609	9	3/8	.63	.07	.05	●	●	●	●	●
16NR 8UN	5026608	8	3/8	.63	.06	.04	●	●	●	●	●
16NL 8UN	5066608	8	3/8	.63	.06	.04	●	●	●	●	●
22NR 7UN	5126607	7	1/2	.87	.09	.06	●	●	●	●	●
22NL 7UN	5166607	7	1/2	.87	.09	.06	●	●	●	●	●
22NR 6UN	5126606	6	1/2	.87	.09	.06	●	●	●	●	●
22NL 6UN	5166606	6	1/2	.87	.09	.06	●	●	●	●	●
22NR 5UN	5126605	5	1/2	.87	.09	.06	●	●	●	●	●
22NL 5UN	5166605	5	1/2	.87	.09	.06	●	●	●	●	●
27NR 4.5UN	52266045	4.5	5/8	1.06	.09	.07	●	●	●	●	●
27NL 4.5UN	52666045	4.5	5/8	1.06	.09	.07	●	●	●	●	●
27NR 4UN	5226604	4	5/8	1.06	.11	.07	●	●	●	●	●
27NL 4UN	5266604	4	5/8	1.06	.11	.07	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	GP22	GP50	AC22	AC3	AC50
Cast Iron	▲				●
Non-Ferrous	▲				●
Stainless/High Temp	▲				●
Steel		▲			●

LAYDOWN




LAYDOWN

UNJ


16NR - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!



INT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16NR 32UNJ-CB	5026832HC	32	3/8	.63	.02	.04	●	●	●	●	●
16NR 28UNJ-CB	5026828HC	28	3/8	.63	.03	.02	●	●	●	●	●
16NR 24UNJ-CB	5026824HC	24	3/8	.63	.03	.02	●	●	●	●	●
16NR 20UNJ-CB	5026820HC	20	3/8	.63	.03	.02	●	●	●	●	●
16NR 18UNJ-CB	5026818HC	18	3/8	.63	.03	.02	●	●	●	●	●
16NR 16UNJ-CB	5026816HC	16	3/8	.63	.03	.02	●	●	●	●	●
16NR 14UNJ-CB	5026814HC	14	3/8	.63	.06	.04	●	●	●	●	●
16NR 12UNJ-CB	5026812HC	12	3/8	.63	.06	.04	●	●	●	●	●
16NR 10UNJ-CB	5026810HC	10	3/8	.63	.06	.04	●	●	●	●	●

UNJ


16ER - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!




EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 32UNJ-CB	5006832HC	32	3/8	.63	.02	.05	●	●	●	●	●
16ER 28UNJ-CB	5006828HC	28	3/8	.63	.03	.03	●	●	●	●	●
16ER 24UNJ-CB	5006824HC	24	3/8	.63	.03	.03	●	●	●	●	●
16ER 20UNJ-CB	5006820HC	20	3/8	.63	.03	.03	●	●	●	●	●
16ER 18UNJ-CB	5006818HC	18	3/8	.63	.03	.03	●	●	●	●	●
16ER 16UNJ-CB	5006816HC	16	3/8	.63	.03	.03	●	●	●	●	●
16ER 14UNJ-CB	5006814HC	14	3/8	.63	.06	.05	●	●	●	●	●
16ER 12UNJ-CB	5006812HC	12	3/8	.63	.06	.05	●	●	●	●	●
16ER 10UNJ-CB	5006810HC	10	3/8	.63	.06	.05	●	●	●	●	●

UNJ

16ER - 3/8" I.C.



EXT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 32UNJ	5006832	32	3/8	.63	.03	.02	●	●	●	●	●
16ER 28UNJ	5006828	28	3/8	.63	.03	.03	●	●	●	●	●
16ER 24UNJ	5006824	24	3/8	.63	.03	.03	●	●	●	●	●
16ER 20UNJ	5006820	20	3/8	.63	.04	.03	●	●	●	●	●
16ER 18UNJ	5006818	18	3/8	.63	.04	.03	●	●	●	●	●
16ER 16UNJ	5006816	16	3/8	.63	.04	.04	●	●	●	●	●
16ER 14UNJ	5006814	14	3/8	.63	.05	.04	●	●	●	●	●
16ER 12UNJ	5006812	12	3/8	.63	.05	.04	●	●	●	●	●
16ER 10UNJ	5006810	10	3/8	.63	.06	.05	●	●	●	●	●
16ER 8UNJ	5006808	8	3/8	.63	.06	.05	●	●	●	●	●

V THREADING - 60°


16ER/NR - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!



EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	R	TIN Coated		AlTiN Coated		
								GP22	GP50	AC22	AC3	AC50
16ER A60-CB	5004600HC	16-48	3/8	.63	.03	.02	.003	●	●	●	●	●
16ER AG60-CB	5004800HC	8-48	3/8	.63	.06	.04	.003	●	●	●	●	●
16ER G60-CB	5005000HC	8-14	3/8	.63	.06	.04	.007	●	●	●	●	●
16NR A60-CB	5024600HC	16-48	3/8	.63	.03	.03	.002	●	●	●	●	●
16NR AG60-CB	5024800HC	8-48	3/8	.63	.06	.04	.002	●	●	●	●	●
16NR G60-CB	5025000HC	8-14	3/8	.63	.06	.04	.007	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	▲	●	●	●	●
Non-Ferrous	▲	●	●	●	●
Stainless/High Temp	▲	●	●	●	●
Steel	▲	●	●	●	●

LAYDOWN




V THREADING - 55°

16ER/NR - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!




EXT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	R	TIN Coated		AlTiN Coated		
								GP22	GP50	AC22	AC3	AC50
16ER A55-CB	5005400HC	16-48	3/8	.63	.03	.02	.002	●	●	●	●	●
16ER AG55-CB	5005600HC	8-48	3/8	.63	.06	.04	.003	●	●	●	●	●
16ER G55-CB	5005800HC	8-14	3/8	.63	.06	.04	.008	●	●	●	●	●
16NR A55-CB	5025400HC	16-48	3/8	.63	.03	.02	.002	●	●	●	●	●
16NR AG55-CB	5025600HC	8-48	3/8	.63	.06	.04	.003	●	●	●	●	●
16NR G55-CB	5025800HC	8-14	3/8	.63	.06	.04	.008	●	●	●	●	●

V THREADING - 55° & 60°

11, 16 & 22ER/NR - 1/4", 3/8" & 1/2" I.C.



EXT RH SHOWN




Description	EDP Code	TPI	IC	L	M	K	R	TIN Coated		AlTiN Coated		
								GP22	GP50	AC22	AC3	AC50
16ER A60	5004600	16-48	3/8	.63	.04	.03	.003	●	●	●	●	●
16EL A60	5044600	16-48	3/8	.63	.04	.03	.003	●	●	●	●	●
16ER AG60	5004800	8-48	3/8	.63	.07	.05	.003	●	●	●	●	●
16EL AG60	5044800	8-48	3/8	.63	.07	.05	.003	●	●	●	●	●
16ER G60	5005000	8-14	3/8	.63	.07	.05	.007	●	●	●	●	●
16EL G60	5045000	8-14	3/8	.63	.07	.05	.007	●	●	●	●	●
22ER N60	5105200	5-7	1/2	.87	.10	.07	.016	●	●	●	●	●
22EL N60	5145200	5-7	1/2	.87	.10	.07	.016	●	●	●	●	●
11NR A55	4925400	16-48	1/4	.43	.04	.03	.003	●	●	●	●	●
11NR A60	4924600	16-48	1/4	.43	.04	.03	.003	●	●	●	●	●
16NR A60	5024600	16-48	3/8	.63	.04	.03	.003	●	●	●	●	●
16NL A60	5064600	16-48	3/8	.63	.04	.03	.003	●	●	●	●	●
16NR AG60	5024800	8-48	3/8	.63	.07	.05	.003	●	●	●	●	●
16NL AG60	5064800	8-48	3/8	.63	.07	.05	.003	●	●	●	●	●
16NR G60	5025000	8-14	3/8	.63	.07	.05	.007	●	●	●	●	●
16NL G60	5065000	8-14	3/8	.63	.07	.05	.007	●	●	●	●	●
22NR N60	5125200	5-7	1/2	.87	.10	.07	.010	●	●	●	●	●
22NL N60	5165200	5-7	1/2	.87	.10	.07	.010	●	●	●	●	●

WHITWORTH

16ER/NR - 3/8" I.C.

w/ patented chipbreaker

Exclusive patented chipbreaker!



EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 36W-CB	5006036HC	36	3/8	.63	.02	.05	●	●	●	●	●
16ER 32W-CB	5006032HC	32	3/8	.63	.02	.05	●	●	●	●	●
16ER 28W-CB	5006028HC	28	3/8	.63	.03	.03	●	●	●	●	●
16ER 24W-CB	5006024HC	24	3/8	.63	.03	.03	●	●	●	●	●
16ER 20W-CB	5006020HC	20	3/8	.63	.03	.03	●	●	●	●	●
16ER 19W-CB	5006019HC	19	3/8	.63	.03	.03	●	●	●	●	●
16ER 18W-CB	5006018HC	18	3/8	.63	.03	.03	●	●	●	●	●
16ER 16W-CB	5006016HC	16	3/8	.63	.03	.03	●	●	●	●	●
16ER 14W-CB	5006014HC	14	3/8	.63	.06	.05	●	●	●	●	●
16ER 12W-CB	5006012HC	12	3/8	.63	.06	.05	●	●	●	●	●
16ER 11W-CB	5006011HC	11	3/8	.63	.06	.05	●	●	●	●	●
16ER 10W-CB	5006010HC	10	3/8	.63	.06	.05	●	●	●	●	●
16ER 8W-CB	5006008HC	8	3/8	.63	.06	.05	●	●	●	●	●
16NR 28W-CB	5026028HC	28	3/8	.63	.03	.03	●	●	●	●	●
16NR 24W-CB	5026024HC	24	3/8	.63	.03	.03	●	●	●	●	●
16NR 20W-CB	5026020HC	20	3/8	.63	.03	.03	●	●	●	●	●
16NR 19W-CB	5026019HC	19	3/8	.63	.03	.03	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	▲	●	●	●
Non-Ferrous	▲	●	●	●
Stainless/High Temp	▲	●	●	●
Steel	▲	●	●	●




LAYDOWN

WHITWORTH
16, 22 & 27ER/NR - 3/8", 1/2" & 5/8" I.C.



EXT RH SHOWN



Description	EDP Code	TPI	IC	L	M	K	TIN Coated		AlTiN Coated		
							GP22	GP50	AC22	AC3	AC50
16ER 28W	5006028	28	3/8	.63	.03	.02	●				●
16ER 20W	5006020	20	3/8	.63	.04	.03	●				●
16ER 19W	5006019	19	3/8	.63	.04	.03	●				●
16ER 18W	5006018	18	3/8	.63	.04	.03	●				●
16ER 16W	5006016	16	3/8	.63	.04	.04	●				●
16ER 14W	5006014	14	3/8	.63	.05	.04	●				●
16ER 12W	5006012	12	3/8	.63	.06	.04	●		●		●
16ER 11W	5006011	11	3/8	.63	.06	.04	●		●		●
16ER 10W	5006010	10	3/8	.63	.06	.04	●	●			●
16ER 9W	5006009	9	3/8	.63	.07	.05	●				●
16ER 8W	5006008	8	3/8	.63	.06	.05	●		●		●
22ER 7W	5106007	7	1/2	.87	.09	.06	●	●			●
22ER 6W	5106006	6	1/2	.87	.09	.06	●				●
22ER 5W	5106005	5	1/2	.87	.09	.07	●				●
27ER 4W	5206004	4	5/8	1.06	.11	.08	●	●	●	●	
16NR 28W	5026028	28	3/8	.63	.03	.02	●				●
16NR 20W	5026020	20	3/8	.63	.04	.03	●				●
16NR 19W	5026019	19	3/8	.63	.04	.03	●				●
16NR 18W	5026018	18	3/8	.63	.04	.03	●				●
16NR 16W	5026016	16	3/8	.63	.04	.04	●				●
16NR 14W	5026014	14	3/8	.63	.05	.04	●				●
16NR 12W	5026012	12	3/8	.63	.06	.04	●		●		●
16NR 11W	5026011	11	3/8	.63	.06	.04	●		●		●
16NR 10W	5026010	10	3/8	.63	.06	.04	●		●		●
16NR 9W	5026009	9	3/8	.63	.07	.05	●				●
16NR 8W	5026008	8	3/8	.63	.08	.05	●		●		●
22NR 7W	5126007	7	1/2	.87	.06	.05	●				●
22NR 6W	5126006	6	1/2	.87	.09	.06	●				●
22NR 5W	5126005	5	1/2	.87	.09	.07	●				●
27NR 4W	5226004	4	5/8	1.06	.11	.08	●				●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

- ▲ Cast Iron
- ▲ Non-Ferrous
- ▲ Stainless/High Temp
- ▲ Steel

EXTERNAL HOLDER

AL
For Threading and Grooving
Inch

RH Holder uses RH Inserts



Most holders available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	A	B	C	E	F*	Insert Screw	Seat Screw	Wrench	Seat
AL0500-3R	916050361	16ER	1/2	1/2	3.27	1.15	.63	SA3	SY3	K3	YE3
AL0500-3L	916050352	16EL	1/2	1/2	3.27	1.15	.63	SA3	SY3	K3	YI3
AL0625-3R	916052361	16ER	5/8	5/8	5	1.15	.63	SA3	SY3	K3	YE3
AL075-3R	916056361	16ER	3/4	3/4	5	1.2	.75	SA3	SY3	K3	YE3
AL075-3L	916056362	16EL	3/4	3/4	5	1.2	.75	SA3	SY3	K3	YI3
AL100-3R	916064361	16ER	1	1	6	1.2	1.0	SA3	SY3	K3	YE3
AL100-3L	916064362	16EL	1	1	6	1.2	1.0	SA3	SY3	K3	YI3
AL100-4R	916064401	22ER	1	1	6	1.42	1.0	SA4	SY4	K4	YE4
AL100-4L	916064402	22EL	1	1	6	1.42	1.0	SA4	SY4	K4	YI4
AL125-4R	916068401	22ER	1-1/4	1-1/4	7	1.42	1.125	SA4	SY4	K4	YE4
AL125-5R	916068441	27ER	1-1/4	1-1/4	7	1.57	1.125	SA5	SY5	K5	YE5
AL125-5L	916068442	27EL	1-1/4	1-1/4	7	1.57	1.125	SA5	SY5	K5	YI5

METRIC

Description	EDP Code	Insert	A	B	C	E	F*	Insert Screw	Seat Screw	Wrench	Seat
AL2020M-3R	916120361	16ER	20,0	20,0	128,6	30,0	20,0	SA3	SY3	K3	YE3
AL2020M-3L	916120362	16EL	20,0	20,0	128,6	30,0	20,0	SA3	SY3	K3	YI3
AL2525M-3R	916125361	16ER	25,0	25,0	150,0	30,0	25,0	SA3	SY3	K3	YE3
AL2525M-3L	916125362	16EL	25,0	25,0	150,0	30,0	25,0	SA3	SY3	K3	YI3
AL3232M-3R	916132361	16ER	32,0	32,0	173,6	30,0	32,0	SA3	SY3	K3	YE3
AL3232M-3L	916132362	16EL	32,0	32,0	173,6	30,0	32,0	SA3	SY3	K3	YI3
AL2525M-4R	916125401	22ER	25,0	25,0	150,0	30,0	25,0	SA3	SY3	K3	YE4
AL2525M-4L	916125402	22EL	25,0	25,0	150,0	30,0	25,0	SA4	SY4	K4	YI4
AL3232M-4R	916132401	22ER	32,0	32,0	173,6	30,0	32,0	SA4	SY4	K4	YE4
AL3232M-4L	916132402	22EL	32,0	32,0	173,6	30,0	32,0	SA4	SY4	K4	YI4
AL3232M-5R	916032441	27ER	32,0	32,0	173,6	30,0	32,0	SA5	SY5	K5	YE5
AL3232M-5L	916032442	27EL	32,0	32,0	173,6	30,0	32,0	SA5	SY5	K5	YI5




LAYDOWN

INTERNAL BAR

AVR/NVR

Inch **Most bars available with coolant port**
(ie: Add CP to end of description)



RH SHOWN

Description	EDP Code	Insert	D	F**	L	C	Min. Bore	Insert Screw	Seat Screw & Washer	Wrench	Seat
NVR 375-2R*	962048351	11NR	.750	.280	7	1.00	.500	SA3	-	K3	-
NVR 500-2R*	962008551	11NR	.750	.370	7	1.25	.625	SA3	-	K3	-
NVR 500-3R*	962008361	16NR	.750	.400	7	1.25	.670	SA3	-	K3	-
NVR 625-3R*	962052361	16NR	.625	.312	7	2.50	.700	SA3	-	K3	-
NVR 625-3L*	962052362	16NL	.625	.312	7	2.50	.700	SA3	-	K3	-
AVR 750-3R	918056361	16NR	.750	.510	7	2.75	.950	SA3	SY3	K3	Y13
AVR 750-3L	918056362	16NL	.750	.510	7	2.75	.950	SA3	SY3	K3	YE3
AVR 100-3R	918064361	16NR	1.000	.640	10	3.00	1.150	SA3	SY3	K3	Y13
AVR 100-3L	918064362	16NL	1.000	.640	10	3.00	1.150	SA3	SY3	K3	YE3
AVR 125-3R	918068361	16NR	1.250	.770	10	3.00	1.400	SA3	SY3	K3	Y13
AVR 125-3L	918068362	16NL	1.250	.770	10	3.00	1.400	SA3	SY3	K3	YE3
AVR 150-3R	918072361	16NR	1.500	.900	12	3.00	1.700	SA3	SY3	K3	Y13
AVR 150-3L	918072362	16NL	1.500	.900	12	3.00	1.700	SA3	SY3	K3	YE3
NVR 750-4R	962056401	22NR	.750	.610	7	2.75	1.100	SA4	-	K4	-
NVR 750-4L	962056402	22NL	.750	.610	7	2.75	1.100	SA4	-	K4	-
AVR 100-4R	918064401	22NR	1.000	.710	10	3.00	1.200	SA4	SY4	K4	Y14
AVR 100-4L	918064402	22NL	1.000	.710	10	3.00	1.200	SA4	SY4	K4	YE4
AVR 125-4R	918068401	22NR	1.250	.840	10	3.00	1.500	SA4	SY4	K4	Y14
AVR 125-4L	918068402	22NL	1.250	.840	10	3.00	1.500	SA4	SY4	K4	YE4
AVR 150-4R	918072401	22NR	1.500	.980	12	3.00	1.800	SA4	SY4	K4	Y14
AVR 150-4L	918072402	22NL	1.500	.980	12	3.00	1.800	SA4	SY4	K4	YE4
AVR 125-5R	918068441	27NR	1.250	.880	10	3.00	1.800	SA5	SY5	K4	Y15
AVR 125-5L	918068442	27NL	1.250	.880	10	3.00	1.800	SA5	SY5	K4	YE5
AVR 150-5R	918072441	27NR	1.500	1.000	12	3.00	1.900	SA5	SY5	K4	Y15
AVR 150-5L	918072442	27NL	1.500	1.000	12	3.00	1.900	SA5	SY5	K4	YE5
AVR 200-5R	918080441	27NR	2.000	1.125	12	3.00	2.400	SA5	SY5	K4	Y15
AVR 200-5L	918080442	27NL	2.000	1.125	12	3.00	2.400	SA5	SY5	K4	YE5

*Over NV Insert

**Support must be slightly modified if used for grooving.

METRIC


Description	EDP Code	Insert	D	F**	L	C	Min. Bore	Insert Screw	Seat Screw & Washer	Wrench	Seat
AVR 20M-3R	918020M361	16NR	20,0	13,4	180,0	20,0	26,8	SA3	SY3	K3	Y13
AVR 20M-3L	918020M362	16NL	20,0	13,4	180,0	20,0	26,8	SA3	SY3	K3	YE3
AVR 25M-3R	918025M361	16NR	25,0	16,3	250,0	20,0	32,6	SA3	SY3	K3	Y13
AVR 25M-3L	918025M362	16NL	25,0	16,3	250,0	20,0	32,6	SA3	SY3	K3	YE3
AVR 32M-3R	918032M361	16NR	32,0	19,5	254,0	76,2	39,1	SA3	SY3	K3	Y13
AVR 32M-3L	918032M362	16NL	32,0	19,5	254,0	76,2	39,1	SA3	SY3	K3	YE3
AVR 40M-3R	918040M361	16NR	40,0	22,8	304,8	76,2	45,7	SA3	SY3	K3	Y13
AVR 40M-3L	918040M362	16NL	40,0	22,8	304,8	76,2	45,7	SA3	SY3	K3	YE3
AVR 25M-4R	918025M401	22NR	25,0	17,4	250,0	20,0	34,8	SA4	SY4	K4	Y14
AVR 25M-4L	918025M402	22NL	25,0	17,4	250,0	20,0	34,8	SA4	SY4	K4	YE4
AVR 32M-4R	918032M401	22NR	32,0	21,3	254,0	20,0	42,6	SA4	SY4	K4	Y14
AVR 32M-4L	918032M402	22NL	32,0	21,3	254,0	20,0	42,6	SA4	SY4	K4	YE4
AVR 40M-4R	918040M401	22NR	40,0	25,7	300,0	22,2	51,5	SA4	SY4	K4	Y14
AVR 40M-4L	918040M402	22NL	40,0	25,7	300,0	22,2	51,5	SA4	SY4	K4	YE4
AVR 50M-4R	918050M401	22NR	50,0	30,8	350,0	25,4	61,6	SA5	SY4	K4	Y14
AVR 50M-4L	918050M402	22NL	50,0	30,8	350,0	25,4	61,6	SA5	SY4	K4	YE4
AVR 50M-5R	918050M41	27NR	50,0	31,7	350,0	25,4	63,5	SA5	SY5	K4	Y15
AVR 50M-5L	918050M42	27NL	50,0	31,7	350,0	25,4	63,5	SA5	SY5	K4	YE5

*Over NV Insert

**Support must be slightly modified if used for grooving.

H-AVR/L*

Most bars available with coolant port
(ie: Add CP to end of description)



RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Insert Screw	Seat Screw	Seat
H16-AVR-3R	9IH18064361	16NR	1.000	1.625	0.650	1.200	SA-3	SY-3	Y13
H20-AVR-3R	9IH18068361	16NR	1.250	1.625	0.765	1.450	SA-3	SY-3	Y13
H24-AVR-3R	9IH18072361	16NR	1.500	1.625	0.890	1.760	SA-3	SY-3	Y13
H32-AVR-3R	9IH18080361	16NR	2.000	1.625	1.281	2.400	SA-3	SY-3	Y13
H24-AVR-4R	9IH18072401	22NR	1.500	1.625	0.978	1.760	SA-4	SY-4	Y14
H32-AVR-4R	9IH18080401	22NR	2.000	1.625	1.281	2.400	SA-4	SY-4	Y14

*Left Hand quoted on request.

HS-AVR/L*

Most bars available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Insert Screw	Seat Screw	Seat
HS25-AVR-3R	9IHS18025M361	16NR	0.98	0.98	0.669	1.260	SA-3	SY-3	Y13
HS32-AVR-3R	9IHS18032M361	16NR	1.26	1.26	0.866	1.570	SA-3	SY-3	Y13
HS40-AVR-3R	9IHS18040M361	16NR	1.57	1.26	1.063	1.970	SA-3	SY-3	Y13
HS50-AVR-3R	9IHS18050M361	16NR	1.97	1.57	1.378	2.480	SA-3	SY-3	Y13
HS40-AVR-4R	9IHS18040M401	22NR	1.57	1.26	1.063	1.970	SA-4	SY-4	Y14
HS50-AVR-4R	9IHS18050M401	22NR	1.97	1.57	1.378	2.480	SA-4	SY-4	Y14

*Left Hand quoted on request.



LAYDOWN

ANVILS

Resultant Helix Angle	4.5°	3.5°	2.5°	1.5°	0.5°	0°	-0.5°	-1.5°
-----------------------	------	------	------	------	------	----	-------	-------

IC	L	Holder	Anvil Description							
3/8"	.63 .63	ER/NL EL/NR	YE3-3P YI3-3P	YE3-2P YI3-2P	YE3-1P YI3-1P	YE3 YI3	YE3-1N YI3-1N	YE3-1.5N YI3-1.5N	YE3-2N YI3-2N	YE3-1N YI3-1N
1/2"	.87 .87	ER/NL EL/NR	YE4-3P YI4-3P	YE4-2P YI4-2P	YE4-1P YI4-1P	YE4 YI4	YE4-1N YI4-1N	YE4-1.5N YI4-1.5N	YE4-2N YI4-2N	YE4-1N YI4-1N
5/8"	1.06 1.06	ER/NL EL/NR	YE5-3P YI5-3P	YE5-2P YI5-2P	YE5-1P YI5-1P	YE5 YI5	YE5-1N YI5-1N	YE5-1.5N YI5-1.5N	YE5-2N YI5-2N	YE5-1N YI5-1N
3/8"M	.63 .63	ER/NL EL/NR				YE3M YI3M	YE3M-1N YI3M-1N	YE3M-1.5N YI3M-1.5N	YE3M-2N	
1/2"M	.87 .87	ER/NL EL/NR				YE4M YI4M	YE4M-1N YI4M-1N	YE4M-1.5N YI4M-1.5N	YE4M-2N	
5/8"M	1.06 1.06	ER/NL EL/NR				YE5M YI5M	YE5M-1N YI5M-1N	YE5M-1.5N YI5M-1.5N		
1/2"Z	.87	EL/NR			YI4Z-1P					
1/2"U	.87 .87	ER/NL EL/NR	YE4U-3P YI4U-3P	YE4U-2P YI4U-2P	YE4U-1P YI4U-1P	YE4U YI4U	YE4U-1N YI4U-1N	YE4U-1.5N YI4U-1.5N	YE4U-2N YI4U-2N	YE4U-1N YI4U-1N

IC	L	TF #	Included Anvils
ANVIL KITS	3/8"	.63	KTY3 YE3-2P, 1P, 1N, 2N, 3N YI3-2P, 1P, 1N, 2N, 3N
		.63	
	1/2"	.87	KTY4 YE4-2P, 1P, 1N, 2N, 3N YI4-2P, 1P, 1N, 2N, 3N
		.87	
	1/2"U	.87	KTY4U YE4U-2P, 1P, 1N, 2N, 3N YI4U-2P, 1P, 1N, 2N, 3N
		.87	
5/8"	1.06	KTYE5 YE5-2P, 1P, 1N, 2N, 3N YI5-2P, 1P, 1N, 2N, 3N	
	1.06		
5/8"U	1.06	KTYE5U YE5U-2P, 1P, 1N, 2N, 3N YI5U-2P, 1P, 1N, 2N, 3N	
	1.06		

Standard Anvil		M Style Anvil		Z Style Anvil	
ER/NL	EL/NR	ER/NL	EL/NR	ER/NL	EL/NR


ANVIL FORMS	
1/2"	YE4-11.5NPT-2M YI4-11.5NPT-2M
5/8"	YE5-8NPT-2M, YE5-8RD-2M YI5-8NPT-2M, YI5-8RD-2M

Helix Angle Table (For Given Pitch and Diameter)


resultant helical angle	4.5°	3.5°	2.5°	1.5°	0.5°	0°	-0.5°	-1.5°
threads per inch	D I A M E T E R							
48			0.12 - 0.18	0.18 - 0.48	0.48 - 1.28	> 1.28	1.28 - 0.48	0.48 - 0.18
44		0.13 - 0.20	0.20 - 0.52	0.52 - 1.40	> 1.40	1.40 - 0.52	0.52 - 0.20	
40		0.11 - 0.14	0.14 - 0.22	0.22 - 0.57	0.57 - 1.52	> 1.52	1.52 - 0.57	0.57 - 0.22
36		0.12 - 0.16	0.16 - 0.24	0.24 - 0.64	0.64 - 1.70	> 1.70	1.70 - 0.64	0.64 - 0.24
32	0.12 - 0.13	0.13 - 0.18	0.18 - 0.27	0.27 - 0.71	0.71 - 1.90	> 1.90	1.90 - 0.71	0.71 - 0.27
28	0.12 - 0.15	0.15 - 0.20	0.20 - 0.31	0.31 - 0.82	0.82 - 2.19	> 2.19	2.19 - 0.82	0.82 - 0.31
27	0.14 - 0.16	0.16 - 0.21	0.21 - 0.32	0.32 - 0.84	0.84 - 2.25	> 2.25	2.25 - 0.84	0.84 - 0.32
24	0.16 - 0.18	0.18 - 0.24	0.24 - 0.36	0.36 - 0.96	0.96 - 2.55	> 2.55	2.55 - 0.86	0.96 - 0.36
20	0.19 - 0.22	0.22 - 0.28	0.28 - 0.43	0.43 - 1.14	1.14 - 3.04	> 3.04	3.04 - 1.14	1.14 - 0.43
18	0.21 - 0.24	0.24 - 0.32	0.32 - 0.49	0.49 - 1.28	1.28 - 3.40	> 3.40	3.40 - 1.28	1.28 - 0.49
16	0.23 - 0.27	0.27 - 0.35	0.35 - 0.54	0.54 - 1.41	1.41 - 3.77	> 3.77	3.77 - 1.41	1.41 - 0.54
14	0.27 - 0.31	0.31 - 0.40	0.40 - 0.62	0.62 - 1.62	1.62 - 4.32	> 4.32	4.32 - 1.62	1.62 - 0.62
13	0.29 - 0.33	0.33 - 0.44	0.44 - 0.67	0.67 - 1.76	1.76 - 4.68	> 4.68	4.68 - 1.76	1.76 - 0.67
12	0.32 - 0.36	0.36 - 0.48	0.48 - 0.73	0.73 - 1.92	1.92 - 5.11	> 5.11	5.11 - 1.92	1.92 - 0.73
11.5	0.33 - 0.38	0.38 - 0.49	0.49 - 0.76	0.76 - 1.98	1.98 - 5.29	> 5.29	5.29 - 1.98	1.98 - 0.76
11	0.35 - 0.39	0.39 - 0.52	0.52 - 0.79	0.79 - 2.07	2.07 - 5.53	> 5.53	5.53 - 2.07	2.07 - 0.79
10	0.38 - 0.43	0.43 - 0.57	0.57 - 0.87	0.87 - 2.28	2.28 - 6.08	> 6.08	6.08 - 2.28	2.28 - 0.87
9	0.42 - 0.48	0.48 - 0.63	0.63 - 0.96	0.96 - 2.53	2.53 - 6.75	> 6.75	6.75 - 2.53	2.53 - 0.96
8	0.47 - 0.54	0.54 - 0.71	0.71 - 1.09	1.09 - 2.85	2.85 - 7.60	> 7.60	7.60 - 2.85	2.85 - 1.09
7	0.54 - 0.62	0.62 - 0.81	0.81 - 1.24	1.24 - 3.26	3.26 - 8.69	> 8.69	8.69 - 3.26	3.26 - 1.24
6	0.63 - 0.72	0.72 - 0.95	0.95 - 1.45	1.45 - 3.81	3.81 - 10.15	> 10.15	10.15 - 3.81	3.81 - 1.45
5	0.76 - 0.87	0.87 - 1.14	1.14 - 1.74	1.74 - 4.56	4.56 - 12.16	> 12.16	12.16 - 4.56	4.56 - 1.74
4.5	0.84 - 0.96	0.96 - 1.26	1.26 - 1.93	1.93 - 5.06	5.06 - 13.49	> 13.49	13.49 - 5.06	5.06 - 1.93
4	0.95 - 1.08	1.08 - 1.42	1.42 - 2.17	2.17 - 5.70	5.70 - 15.20	> 15.20	15.20 - 5.70	5.70 - 2.17



Helix Angle Diagram

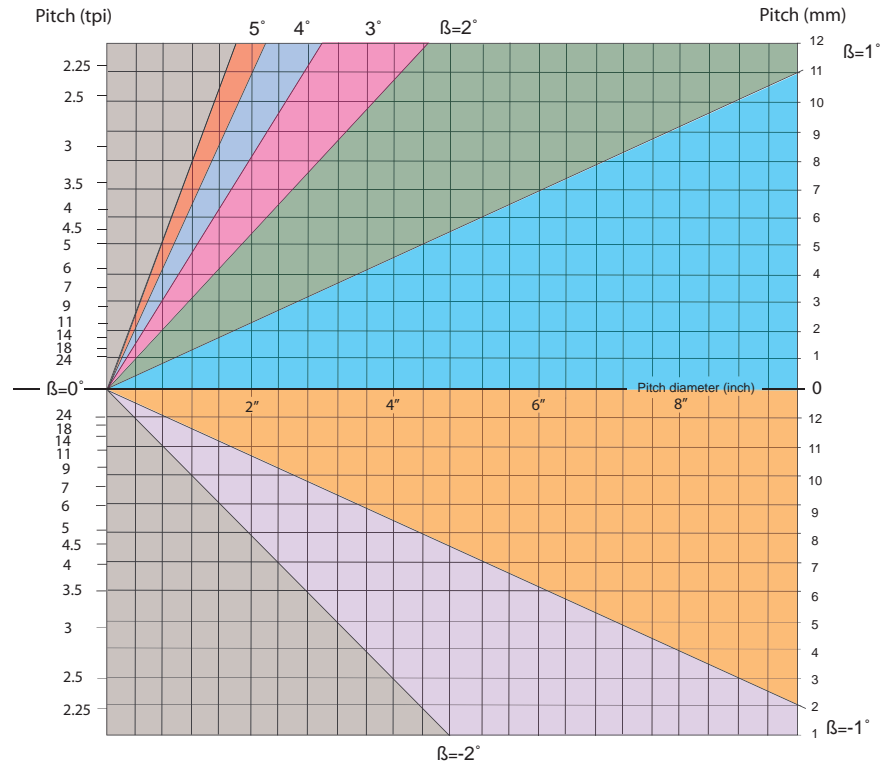

Feed direction towards the chuck

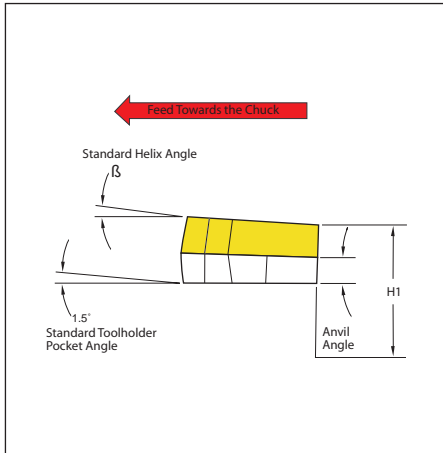

RH Tooling

External RH Thread

- counterclockwise rotation
- right hand toolholder
- right hand insert

Internal RH Thread

- counterclockwise rotation
- right hand bar
- right hand insert

LH Tooling


External LH Thread

- clockwise rotation
- left hand toolholder
- left hand insert

Internal LH Thread

- clockwise rotation
- left hand bar
- left hand insert

Feed direction towards the tailstock

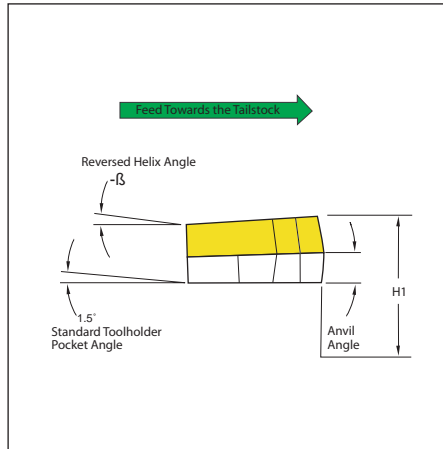

RH Tooling

External LH Thread

- counterclockwise rotation
- right hand toolholder
- right hand insert

Internal LH Thread

- counterclockwise rotation
- right hand bar
- right hand insert

RH Tooling

External RH Thread

- clockwise rotation
- left hand toolholder
- left hand insert

Internal RH Thread

- clockwise rotation
- left hand bar
- left hand insert



LAYDOWN

L-Style Laydown Insert Nomenclature Chart

L

43

NT

5

B

75

EXT

GP3

A

type of insert

L ■ Laydown
LDS ■ Double sided
LPGC ■ Laydown
TPGC ■ T-style

pitch (tpi)

threads

4
5
8
10

taper per foot

75 ■ 3/4"
1 ■ 1"
12 ■ 1-1/4"
15 ■ 1-1/2"

grade

edge prep

insert ic size

32 ■ 3/8"
42 ■ 1/2"
43 ■ 1/2"
53 ■ 5/8"
54 ■ 5/8"

thread form

NT ■ Non-Topping Acme Thread
NV ■ Non-Topping 60° V-Thread
H90 ■ API Hughes H90 Thread

thread type

B ■ Buttress Thread
NPT ■ National Pipe Thread
PA ■ Pittsburgh Acme
RD ■ API Round Thread
UN ■ Unified Thread
VAM ■ VAM Thread
XL ■ X-Line Thread

type of insert


EXT ■ External
INT ■ Internal

api form

cat no.	tpi	tpf
425	4	2
428	4	2
435	4	3
438	4	3
530	5	3
4PAC	4	1-1/2
H902	3-1/2	2
H903	3-1/2	3
H90S	3	1-1/4



ACME L43/L53 - 1/2" & 5/8" I.C.

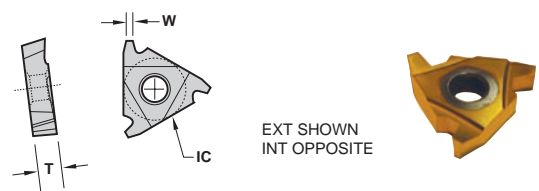

EXT SHOWN
INT OPPOSITE

Description	EDP Code	TPI	W	IC	T	TIN Coated			AlTiN Coated		
						GP22	GP50	GP5	AC22	AC3	AC50
L43 NT 8P EXT	0215C080	8	.0411	.500	.189		●				●
L43 NT 6P EXT	0215C060	6	.0566	.500	.189		●				●
L43 NT 5P EXT	0215C050	5	.0689	.500	.189		●				●
L53 NT 4P EXT	0247C040	4	.0875	.625	.189		●				●
L43 NT 8P INT	0215A080	8	.0411	.500	.189		●				●
L43 NT 6P INT	0215A060	6	.0566	.500	.189		●				●
L43 NT 5P INT	0215A050	5	.0689	.500	.189		●				●
L53 NT 4P INT	0247A040	4	.0875	.625	.189		●				●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.


Material	GP22	GP50	GP5	AC22	AC3	AC50
Cast Iron		▲				●
Non-Ferrous		▲				●
Stainless/High Temp		▲				●
Steel		▲				●

LAYDOWN



ACME

LPGC 32, 42 & 43 - 3/8" & 1/2 I.C.




EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	W	IC	T	TIN Coated			AlTiN Coated		
						GP22	GP50	GP5	AC22	AC3	AC50
LPGC 32 NT 12P INT RH	0204A120	12	.0283	.375	.127			●			
LPGC 32 NT 10P INT RH	0204A100	10	.0319	.375	.127			●			
LPGC 32 NT 8P INT RH	0204A080	8	.0411	.375	.127			●			
LPGC 42 NT 8P INT RH	0213A080	8	.0411	.500	.127			●			
LPGC 42 NT 6P INT RH	0213A060	6	.0566	.500	.127			●			
LPGC 42 NT 5P INT RH	0213A050	5	.0689	.500	.127			●			
LPGC 42 NT 4P INT RH*	0213A040	4	.0875	.500	.127			●			
LPGC 43 NT 8P INT RH	0227A080	8	.0411	.500	.189			●			
LPGC 43 NT 6P INT RH	0227A060	6	.0566	.500	.189			●			
LPGC 43 NT 5P INT RH	0227A050	5	.0689	.500	.189			●			
LPGC 43 NT 4P INT RH*	0227A040	4	.0875	.500	.189			●			

*Bar must be modified to clear depth.


TPGC 32, 42 & 43 - 3/8" & 1/2 I.C.




Description	EDP Code	TPI	W	IC	T	TIN Coated			AlTiN Coated		
						GP22	GP50	GP5	AC22	AC3	AC50
TPGC 32 NT 10P	0207100	10	.0319	.375	.127			●			
TPGC 32 NT 8P	0207080	8	.0411	.375	.127			●			
TPGC 32 NT 6P	0207060	6	.0566	.375	.127			●			
TPGC 32 NT 5P	0207050	5	.0689	.375	.127			●			
TPGC 42 NT 8P	0214080	8	.0411	.500	.127			●			
TPGC 42 NT 6P	0214060	6	.0566	.500	.127			●			
TPGC 42 NT 5P	0214050	5	.0689	.500	.127			●			
TPGC 42 NT 4P	0214040	4	.0875	.500	.127			●			
TPGC 43 NT 5P	0238050	5	.0689	.500	.189			●			
TPGC 43 NT 4P	0238040	4	.0875	.500	.189			●			

ACME STUB

L43/L53 - 1/2" & 5/8" I.C.




INT SHOWN
EXT OPPOSITE




Description	EDP Code	TPI	W	IC	T	TIN Coated			AlTiN Coated		
						GP22	GP50	GP54	AC22	AC3	AC50
L43 NT 8P STUB EXT	0215C081	8	.0476	.500	.189		●				
L43 NT 6P STUB EXT	0215C061	6	.0652	.500	.189		●				
L43 NT 5P STUB EXT	0215C051	5	.0793	.500	.189		●				
L53 NT 4P STUB EXT	0247C041	4	.1004	.625	.189		●				
L43 NT 8P STUB INT	0215A081	8	.0476	.500	.189		●				
L43 NT 6P STUB INT	0215A061	6	.0652	.500	.189		●				
L43 NT 5P STUB INT	0215A051	5	.0793	.500	.189		●				
L53 NT 4P STUB INT	0247A041	4	.1004	.625	.189		●				

LPGC 32, 42 & 43 - 3/8" & 1/2 I.C.



EXT SHOWN
INT OPPOSITE



Description	EDP Code	TPI	W	IC	T	TIN Coated			AlTiN Coated		
						GP22	GP5	GP50	AC25	AC3	AC50
LPGC 32 NT 8P STUB INT	0204A081	8	.0476	.375	.127						
LPGC 42 NT 8P STUB INT	0213A081	8	.0476	.500	.127		●	●			
LPGC 42 NT 6P STUB INT	0213A061	6	.0652	.500	.127		●	●			
LPGC 42 NT 5P STUB INT	0213A051	5	.0793	.500	.127		●	●			
LPGC 42 NT 4P STUB INT	0213A041	4	.1004	.500	.127		●	●			
LPGC 43 NT 8P STUB INT	0227A081	8	.0476	.500	.189		●	●			
LPGC 43 NT 6P STUB INT	0227A061	6	.0652	.500	.189		●	●			
LPGC 43 NT 5P STUB INT	0227A051	5	.0793	.500	.189		●	●	●		
LPGC 43 NT 4P STUB INT	0227A041	4	.1004	.500	.189		●	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel





LAYDOWN

ACME STUB TPGC 32, 42 & 43 - 3/8" & 1/2 I.C.



Description	EDP Code	TPI	W	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP5	GP50	AC22	AC3	AC50
TPGC 32 NT 8P STUB	0207081	8	.0476	.375	.127		●	●			
TPGC 32 NT 6P STUB	0207061	6	.0652	.375	.127		●	●			
TPGC 32 NT 5P STUB	0207051	5	.0793	.375	.127		●	●			
TPGC 42 NT 8P STUB	0214081	8	.0476	.500	.127		●	●			
TPGC 42 NT 6P STUB	0214061	6	.0652	.500	.127		●	●			
TPGC 42 NT 5P STUB	0214051	5	.0793	.500	.127		●	●			
TPGC 42 NT 4P STUB	0214041	4	.1004	.500	.127		●	●			
TPGC 43 NT 5P STUB	0238051	5	.0793	.500	.189		●	●			
TPGC 43 NT 4P STUB	0238041	4	.1004	.500	.189		●	●			


API BUTTRESS L43/L53 - 1/2" & 5/8" I.C.

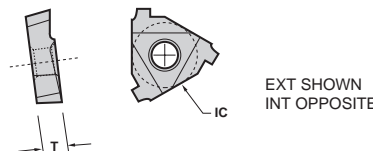

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	TIN Coated			A1TIN Coated		
							GP22	GP50	GP54	AC22	AC3	AC50
L43 5B75 EXT-FC	16154F	5	3/4	.500	.189	4-1/2 - 13-3/8		●				
L43 5B1 EXT -FC	17154F	5	1	.500	.189	16 and larger		●				
L43 8B75 EXT-FC	21154F	8	3/4	.500	.189	US Improved Buttress		●				
L53 5B75 EXT-FC	16474F	5	3/4	.625	.189	4-1/2 - 13-3/8		●				
L53 5B1 EXT-FC	17474F	5	1	.625	.189	16 and larger		●				
L53 8B75 EXT-FC	21474F	8	3/4	.625	.189	US Improved Buttress		●				
L43 5B75 INT-FC	16158F	5	3/4	.500	.189	4-1/2 - 13-3/8		●				
L43 5B1 INT-FC	17158F	5	1	.500	.189	16 and larger		●				
L43 8B75 INT-FC	21158F	8	3/4	.500	.189	US Improved Buttress		●				
L53 5B75 INT-FC	16478F	5	3/4	.625	.189	4-1/2 - 13-3/8		●				
L53 5B1 INT-FC	17478F	5	1	.625	.189	16 and larger		●				
L53 8B75 INT-FC	21478F	8	3/4	.625	.189	US Improved Buttress		●				



FC designates 5° flank clearance

API HUGHES H90 L53 - 5/8" I.C.

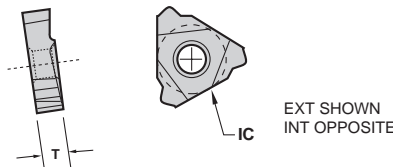

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	TIN Coated			A1TIN Coated		
							GP22	GP50	GP54	AC22	AC3	AC50
L53 H902 EXT	28474	3-1/2	2	.625	.189	3-1/2 - 6-5/8 H90		●				
L53 H903 EXT	29474	3-1/2	3	.625	.189	7 - 8-5/8 H90		●				
L53 H90S EXT	27474	3	1-1/4	.625	.189	2-3/8 - 3-1/2 Slimline		●				
L53 H902 INT	28478	3-1/2	2	.625	.189	3-1/2 - 6-5/8 H90		●				
L53 H903 INT	29478	3-1/2	3	.625	.189	7 - 8-5/8 H90		●				
L53 H90S INT	27478	3	1-1/4	.625	.189	2-3/8 - 3-1/2 Slimline		●				

LDS 54 - 5/8 I.C. Double Sided

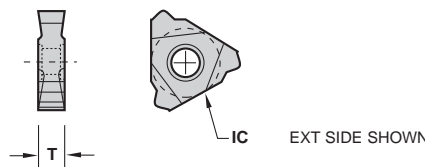

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	TIN Coated			A1TIN Coated		
							GP22	GP50	GP54	AC22	AC3	AC50
LDS 54 H902	28490	3-1/2	2	.625	.252	3-1/2 - 6-5/8 H90			●			
LDS 54 H903	29490	3-1/2	3	.625	.252	7 - 8-5/8 H90			●			
LDS 54 H90S	27490	3	1-1/4	.625	.252	2-3/8 - 3-1/2 Slimline			●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
			▲

LAYDOWN



API ROTARY SHOULDER CONNECTION

L43/53 - 1/2" & 5/8" I.C.

■ Must be used with API bars.



EXT SHOWN
INT OPPOSITE

Description	EDP Code	TPI	TPF	R	IC	T	Connection	TiN Coated		AlTiN Coated		
								GP50	GP54	AC22	AC3	AC50
L43 425 EXT	09154	4	2	.025	.500	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●		●	●	●
L43 428 EXT	10154	4	2	.038	.500	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●		●	●	●
L43 42F EXT*	14154	4	2	---	.500	.189	V0.065*					
L43 435 EXT	11154	4	3	.025	.500	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●		●	●	●
L43 438 EXT	12154	4	3	.038	.500	.189	NC56 - NC71	●		●	●	●
L43 530 EXT	13154	5	3	.020	.500	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●
L43 4PAC EXT	15154	4	1-1/2	---	.500	.189	American Open Hole	●				
L53 425 EXT	09474	4	2	.025	.625	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●		●	●	●
L53 428 EXT	10474	4	2	.038	.625	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●		●	●	●
L53 42F EXT*	14474	4	2	---	.625	.189	V0.065*					
L53 435 EXT	11474	4	3	.025	.625	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●		●	●	●
L53 438 EXT	12474	4	3	.038	.625	.189	NC56 - NC71	●		●	●	●
L53 530 EXT	13474	5	3	.020	.625	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●
L53 4PAC EXT	15474	4	1-1/2	---	.625	.189	American Open Hole	●				
L43 425 INT	09158	4	2	.025	.500	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●		●	●	●
L43 428 INT	10158	4	2	.038	.500	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●		●	●	●
L43 42F INT*	14158	4	2	---	.500	.189	V0.065*					
L43 435 INT	11158	4	3	.025	.500	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●		●	●	●
L43 438 INT	12158	4	3	.038	.500	.189	NC56 - NC71	●		●	●	●
L43 530 INT	13158	5	3	.020	.500	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●
L43 4PAC INT	15158	4	1-1/2	---	.500	.189	American Open Hole	●				
L53 425 INT	09478	4	2	.025	.625	.189	5-1/2 FH 6-5/8 FH 6-5/8 Reg.	●		●	●	●
L53 428 INT	10478	4	2	.038	.625	.189	NC 23-NC50 2-3/8 - 5-1/2 IF	●		●	●	●
L53 42F INT*	14478	4	2	---	.625	.189	V0.065*					
L53 435 INT	11478	4	3	.025	.625	.189	5-1/2 Rg. 7-5/8 Reg. 8-5/8 Reg.	●		●	●	●
L53 438 INT	12478	4	3	.038	.625	.189	NC56 - NC71	●		●	●	●
L53 530 INT	13478	5	3	.020	.625	.189	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●
L53 4PAC INT	15478	4	1-1/2	---	.625	.189	American Open Hole	●				


* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

LAYDOWN

LDS 54 Double Sided Lead Follow Topping Internal/External with patented chipbreaker

Exclusive patented design!

■ For holders see pg. 136, 138

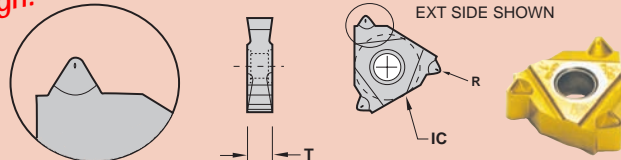


EXT SIDE SHOWN

Description	EDP Code	TPI	TPF	R	IC	T	Connection	TiN Coated		AlTiN Coated		
								GP54	AC22	AC3	AC50	AC54
LDS 54 428-CB #1	10490HC	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF	●		●	●	●
LDS 54 438-CB #2	12490HC	4	3	.038	.625	.252	NC56-NC71	●		●	●	●
LDS 54 425-CB #3	09490HC	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.	●		●	●	●
LDS 54 435-CB #4	11490HC	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.	●		●	●	●
LDS 54 530-CB #5	13490HC	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●

LDS 54 Double Sided Follow Topping Internal/External with patented chipbreaker

Exclusive patented design!

■ For holders see pg. 136, 138

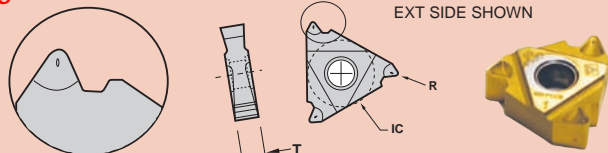

EXT SIDE SHOWN

Description	EDP Code	TPI	TPF	R	IC	T	Connection	TiN Coated		AlTiN Coated		
								GP54	AC22	AC3	AC50	AC54
LDS 54 428 FT-CB #1	10495HC	4	2	.038	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF	●		●	●	●
LDS 54 438 FT-CB #2	12495HC	4	3	.038	.625	.252	NC56-NC71	●		●	●	●
LDS 54 425 FT-CB #3	09495HC	4	2	.025	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.	●		●	●	●
LDS 54 435 FT-CB #4	11495HC	4	3	.025	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.	●		●	●	●
LDS 54 530 FT-CB #5	13495HC	5	3	.020	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.	●		●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Material	GP54	AC22	AC3	AC50	AC54
Cast Iron				●	
Non-Ferrous				●	
Stainless/High Temp				●	
Steel	▲	●	●		



LAYDOWN

API ROTARY SHOULDER CONNECTION


LDS 54 - 5/8" I.C.
Double Sided
Full Topping

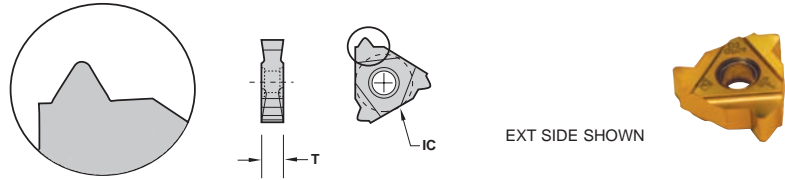

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	TIN Coated		A1TIN Coated			
							GP22	GP54	AC22	AC3	AC50	AC54
LDS 54 428 #1	10490	4	2	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438 #2	12490	4	3	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425 #3	09490	4	2	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435 #4	11490	4	3	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530 #5	13490	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●
LDS 54 42F*	14490	4	2	.625	.252	V0.065*		●				
LDS 54 4PAC	15490	4	1-1/2	.625	.252	American Open Hole	●	●				

* Obsolescent thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4


LDS 54 - 5/8" I.C.
Double Sided
Follow Topping

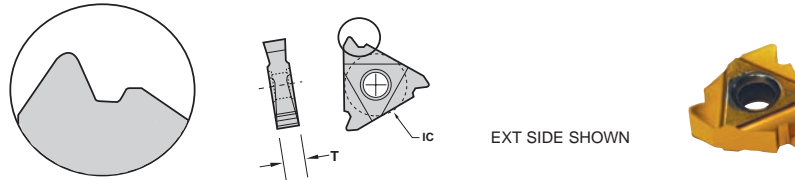

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	TIN Coated		A1TIN Coated			
							GP22	GP54	AC22	AC3	AC50	AC54
LDS 54 428 #1 FT	10495	4	2	.625	.252	NC23-NC50, 2-3/8-5-1/2 IF		●	●	●	●	●
LDS 54 438 #2 FT	12495	4	3	.625	.252	NC56-NC71		●	●	●	●	●
LDS 54 425 #3 FT	09495	4	2	.625	.252	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.		●	●	●	●	●
LDS 54 435 #4 FT	11495	4	3	.625	.252	5-1/2 Reg. 7-5/8 Reg 8-5/8 Reg.		●	●	●	●	●
LDS 54 530 #5 FT	13495	5	3	.625	.252	3-1/2 FH 2-3/8 - 4-1/2 Reg.		●	●	●	●	●
LDS 54 42F* FT	14495	4	2	.625	.252	V0.065*		●				
LDS 54 4PAC FT	15495	4	1-1/2	.625	.252	American Open Hole	●	●				


* Obsolescent thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API ROUND
L43/L53 - 1/2" & 5/8" I.C.

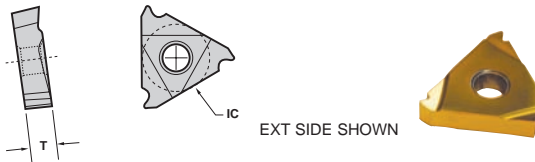

Description	EDP Code	TPI	TPF	IC	T	TIN Coated		A1TIN Coated			
						GP22	GP50	GP54	AC22	AC3	AC50
L43 10RD EXT	34154	10	3/4	.500	.189		●		●	●	●
L43 8RD EXT	32154	8	3/4	.500	.189		●		●	●	●
L53 8RD EXT	32474	8	3/4	.625	.189		●		●	●	●
L43 8RD INT	34158	8	3/4	.500	.189		●		●	●	●
L43 10RD INT	32158	10	3/4	.500	.189		●		●	●	●
L53 8RD INT	32478	8	3/4	.625	.189		●		●	●	●


LDS 43 & 54 - 1/2" & 5/8" I.C.
Double Sided

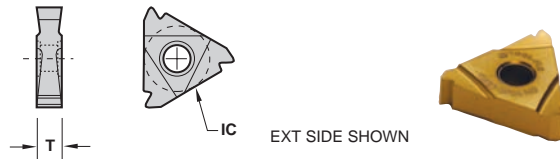

Description	EDP Code	TPI	TPF	IC	T	TIN Coated		A1TIN Coated			
						GP22	GP50	GP54	AC22	AC3	AC50
LDS 43 10RD	34180	10	3/4	.500	.189			●	●	●	●
LDS 43 8RD	32180	8	3/4	.500	.189			●	●	●	●
LDS 54 10RD	34490	10	3/4	.625	.252			●	●	●	●
LDS 54 8RD	32490	8	3/4	.625	.252			●	●	●	●

LDS 54 - 5/8" I.C.
Double Sided
Internal/External
with patented chipbreaker

Exclusive patented design!

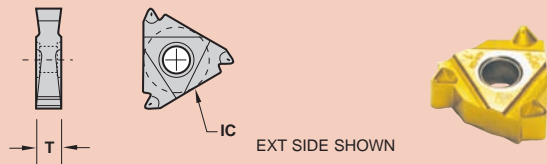


Description	EDP Code	TPI	TPF	IC	T	TIN Coated		A1TIN Coated			
						GP22	GP50	GP54	AC22	AC3	AC50
LDS 54 10RD-CB	34490	10	3/4	.625	.252			●	●	●	●
LDS 54 8RD-CB	32490	8	3/4	.625	.252			●	●	●	●

LAYDOWN

LAYDOWN




API ROUND TNFA 43 - 1/2" I.C.

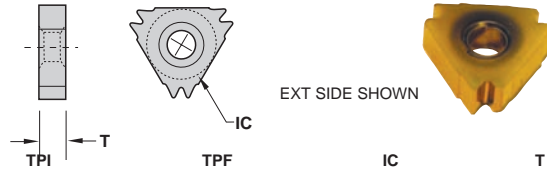


Description	EDP Code	TPI	TPF	IC	T	GP22	GP50	GP54	AC22	AC3	AC50
TNFA 43 8RD	32N70	8	3/4	.500	.187	●	●	●	●	●	●

API VAM L43 - 1/2" I.C.

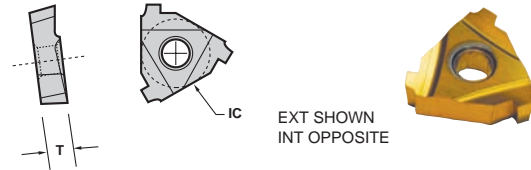


Description	EDP Code	TPI	TPF	IC	T	GP22	GP50	GP54	AC22	AC3	AC50
L43 5VAM EXT	23154	5	3/4	.500	.189	●	●	●	●	●	●
L43 6VAM EXT	24154	6	3/4	.500	.189	●	●	●	●	●	●
L43 8VAM EXT	25154	8	3/4	.500	.189	●	●	●	●	●	●
L43 5VAM INT	23158	5	3/4	.500	.189	●	●	●	●	●	●
L43 6VAM INT	24158	6	3/4	.500	.189	●	●	●	●	●	●
L43 8VAM INT	25158	8	3/4	.500	.189	●	●	●	●	●	●

API X-LINE L43/L53 - 1/2" & 5/8" I.C.

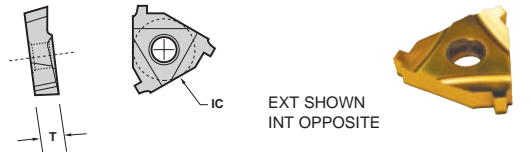

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	GP22	GP50	GP54	AC22	AC3	AC50
L43 6XL15 EXT	19154	6	1-1/2	.500	.189	5 - 7-5/8	●	●	●	●	●	●
L43 6XL75 EXT	20154	6	3/4	.500	.189	-	●	●	●	●	●	●
L43 5XL12 EXT	18154	5	1-1/4	.500	.189	8-5/8 - 10-3/4	●	●	●	●	●	●
L53 6XL15 EXT	19474	6	1-1/2	.625	.189	5 - 7-5/8	●	●	●	●	●	●
L53 6XL75 EXT	20474	6	3/4	.625	.189	-	●	●	●	●	●	●
L53 5XL12 EXT	18474	5	1-1/4	.625	.189	8-5/8 - 10-3/4	●	●	●	●	●	●
L43 6XL15 INT	19158	6	1-1/2	.500	.189	5 - 7-5/8	●	●	●	●	●	●
L43 6XL75 INT	20158	6	3/4	.500	.189	-	●	●	●	●	●	●
L43 5XL12 INT	18158	5	1-1/4	.500	.189	8-5/8 - 10-3/4	●	●	●	●	●	●
L53 6XL15 INT	19478	6	1-1/2	.625	.189	5 - 7-5/8	●	●	●	●	●	●
L53 6XL75 INT	20478	6	3/4	.625	.189	-	●	●	●	●	●	●
L53 5XL12 INT	18478	5	1-1/4	.625	.189	8-5/8 - 10-3/4	●	●	●	●	●	●

NPT L43 - 1/2" I.C.

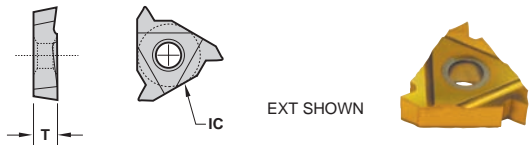


Description	EDP Code	TPI	TPF	IC	T	GP22	GP50	GP54	AC22	AC3	AC50
L43 11.5NPT EXT	3615114	11.5	3/4	.500	.189	●	●	●	●	●	●
L43 8NPT EXT	3615084	8	3/4	.500	.189	●	●	●	●	●	●
L43 11.5NPT INT	3615118	11.5	3/4	.500	.189	●	●	●	●	●	●
L43 8NPT INT	3615088	8	3/4	.500	.189	●	●	●	●	●	●

L43 - 1/2" I.C. Multi-Tooth



Description	EDP Code	TPI	TPF	IC	T	GP22	GP50	GP54	AC22	AC3	AC50
L43 11.5NPT2M EXT	3615114T	11.5	3/4	.500	.189	●	●	●	●	●	●
L43 11.5NPT2M INT	3615118T	11.5	3/4	.500	.189	●	●	●	●	●	●

LDS 43 - 1/2" I.C. Double Sided

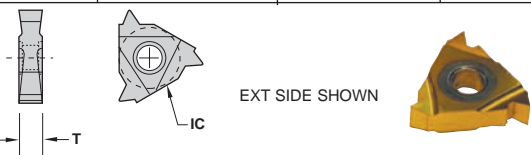

Description	EDP Code	TPI	TPF	IC	T	GP22	GP50	GP54	AC22	AC3	AC50
LDS 43 14NPT	3618140	14	3/4	.500	.189	●	●	●	●	●	●
LDS 43 11.5NPT	3618110	11.5	3/4	.500	.189	●	●	●	●	●	●
LDS 43 8NPT	3618080	8	3/4	.500	.189	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	Non-Ferrous	Stainless/High Temp	Steel
●	●	●	●




LAYDOWN

PITTSBURGH ACME L43/L53 - 1/2" & 5/8" I.C.

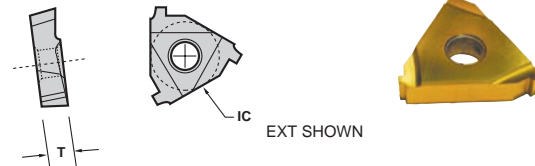


Description	EDP Code	TPI	TPF	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP50	GP54	AC22	AC3	AC50
L43 8PA75 EXT	22154	8	3/4	.500	.189	●	●				
L53 8PA75 EXT	22474	8	3/4	.625	.189	●	●				
L43 8PA75 INT	22158	8	3/4	.500	.189	●	●				
L53 8PA75 INT	22478	8	3/4	.625	.189	●	●				

V THREADING - 60° L43 & 53- 1/2" & 5/8" I.C.

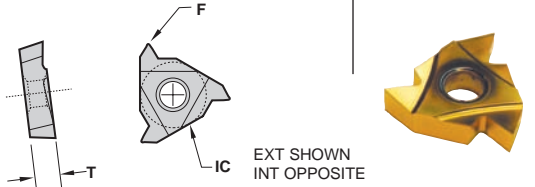


Description	EDP Code	TPI	F	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP50	GP54	AC22	AC3	AC50
L43 NV EXT	0115040	8-48	.006/.008	.500	.189	●	●			●	●
L53 NV EXT	0147040	5-32	.006/.008	.625	.189	●	●			●	●
L43 NV INT	0115080	8-48	.006/.008	.500	.189	●	●			●	●
L53 NV INT	0147080	5-32	.006/.008	.625	.189	●	●			●	●

LN 43 - 1/2" I.C. Double Sided

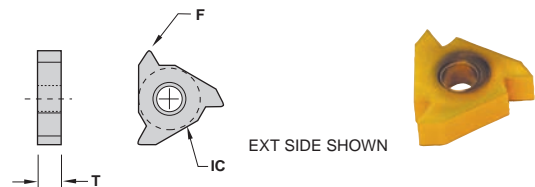


Description	EDP Code	TPI	F	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP50	GP54	AC22	AC3	AC50
LN 43 NV	0120000	8-48	.006/.008	.500	.189	●	●			●	●

V THREADING - 60° LPGC 32, 42 & 43 - 3/8" & 1/2" I.C.

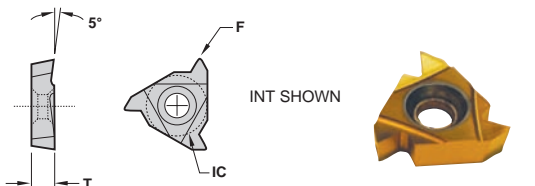


Description	EDP Code	TPI	F	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP5	GP54	AC25	AC3	AC50
LPGC 32 NV INT RH	0104R80	8-48	.004/.006	.375	.127	●	●				
LPGC 32 NV INT LH	0104L80	8-48	.004/.006	.375	.127	●	●				
LPGC 42 NV INT RH	0113R80	8-20	.006/.008	.500	.127	●	●		●		
LPGC 42 NV INT LH	0113L80	8-20	.006/.008	.500	.127	●	●		●		
LPGC 43 NV INT RH	0127R80	5-16	.006/.008	.500	.189	●	●		●		
LPGC 43 NV INT LH	0127L80	5-16	.006/.008	.500	.189	●	●		●		

TNPGC 43 - 1/2" I.C. Double Sided

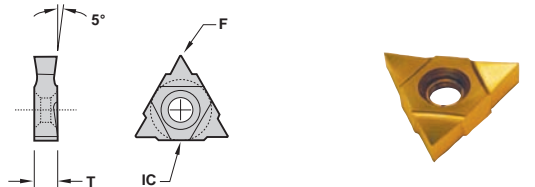

Description	EDP Code	TPI	F	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP50	GP54	AC22	AC3	AC50
TNPGC 43 NV	0137000	8-48	.005/.007	.500	.189	●	●			●	●

TPGC 32, 42 & 43 - 3/8" & 1/2" I.C.

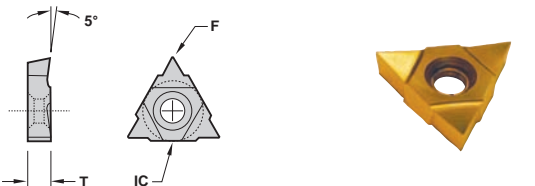

Description	EDP Code	TPI	F	IC	T	TIN Coated			A1TIN Coated		
						GP22	GP5	GP54	AC22	AC3	AC50
TPGC 32 NV	0107000	8-48	.005/.007	.375	.127	●	●		●		
TPGC 42 NV	0114000	5-32	.005/.007	.500	.127	●	●				
TPGC 43 NV	0138000	4-16	.005/.007	.500	.189	●	●				

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Iron
Non-Ferrous
Stainless/High Temp
Steel

LAYDOWN



LAYDOWN

EXTERNAL HOLDER MTENR/L Threading

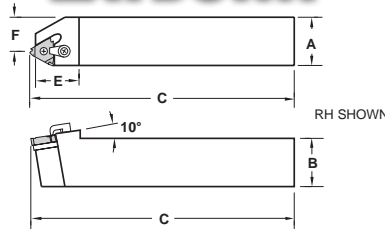


PARTS

Description	EDP Code	Insert	A	B	C	E	F*	Seat	Lock Pin	Clamp	Clamp Screw
MTENR-164	95201656	TNPGC 43	1	1	6	1.47	.63	TS 43*	NL46	TC-190	STC5
MTENR-204	95202056	TNPGC 43	1-1/4	1-1/4	7	1.47	.88	TS 43*	NL46	TC-190	STC5

*Seats can be ordered as NO FORM or a FORM can be specified. Ex: TS 43 API EXT Seat.

MTVNR/L Threading & Grooving Inch

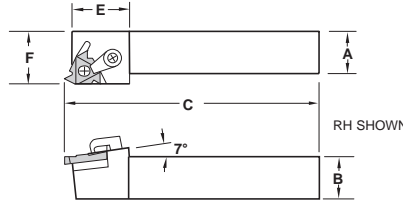

PARTS

Description	EDP Code	Insert	A	B	C	E	F*	Seat	Lock Pin	Clamp	Clamp Screw
MTVNR-164	95801656	L43	1	1	6	1.27	1.250	LS43*	NL46	TC-190	STC5
MTVNL-164	95701656	L43	1	1	6	1.27	1.250	LS43*	NL46	TC-190	STC5
MTVNR-204	95802056	L43	1-1/4	1-1/4	7	1.27	1.500	LS43*	NL46	TC-190	STC5
MTVNR-165	95801662	L53	1	1	6	1.53	1.250	LS53*	NL58	TC-250	STC11
MTVNL-165	95701662	L53	1	1	6	1.53	1.250	LS53*	NL58	TC-250	STC11
MTVNR-205	95802062	L53	1-1/4	1-1/4	7	1.53	1.500	LS53*	NL58	TC-250	STC11
MTVNR-2054	95802064	LDS 54	1-1/4	1-1/4	7	1.53	1.500	LS53*	NL58	TC-250	STC11

*Seats can be ordered as NO FORM or a FORM can be specified. Ex: LS 43 API EXT. Seat.


METRIC

PARTS

Description	EDP Code	Insert	A	B	C	E	F*	Seat	Lock Pin	Clamp	Clamp Screw
MTVNR-2525M4	95801656	L43	1	1	6	1.27	1.250	LS43*	NL46	TC-190	STC5
MTVNL-2525M4	95701656	L43	1	1	6	1.27	1.250	LS43*	NL46	TC-190	STC5
MTVNR-3232M4	95802056	L43	1-1/4	1-1/4	7	1.27	1.500	LS43*	NL46	TC-190	STC5
MTVNR-2525M5	95801662	L53	1	1	6	1.53	1.250	LS53*	NL58	TC-250	STC11
MTVNL-2525M5	95701662	L53	1	1	6	1.53	1.250	LS53*	NL58	TC-250	STC11
MTVNR-3232M5	95802062	L53	1-1/4	1-1/4	7	1.53	1.500	LS53*	NL58	TC-250	STC11
MTVNR-3232M54	95802064	LDS 54	1-1/4	1-1/4	7	1.53	1.500	LS53*	NL58	TC-250	STC11

*Seats can be ordered as NO FORM or a FORM can be specified. Ex: LS 43 API EXT. Seat.

INTERCHANGEABLE HEADS H-LNFR/L*




RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	Seat	Clamp	Clamp Screw	Lock Pin
H20-LNFR-43	9IH4206856	L43	1.250	1.625	0.765	1.450		TC-190	STC-9	NL-44
H24-LNFR-43	9IH4207256	L43	1.500	1.625	0.890	1.760		TC-190	STC-9	NL-44
H32-LNFR-43	9IH4208056	L43	2.000	1.625	1.281	2.400	LS43	TC-190	STC-5	NL-46
H24-LNFR-53API	9IH4407262	L53	1.500	1.625	0.890	1.760		TC-250	STC-11	NL-56
H32-LNFR-53API	9IH4408062	L53	2.000	1.625	1.281	2.400		TC-250	STC-11	NL-56
H24-LNFR-54API	9IH4407264	LDS 54	1.500	1.625	0.890	1.760		TC-250	STC-11	H410-1
H32-LNFR-54API	9IH4408064	LDS 54	2.000	1.625	1.281	2.400		TC-250	STC-11	NL-56

*Non API heads only for 8RD, 10RD, 5B75, 5B1 threads. API heads required for rotary shoulder connections threads.

HS-LNFR/L*



RH SHOWN

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore (D)	Clamp	Clamp Screw	Lock Pin
HS32-LNFR-43	9IHS42032M56	L43	1.25	1.26	0.866	1.570	TC-190	STC-9	NL-44
HS40-LNFR-43	9IHS42040M56	L43	1.57	1.26	1.063	1.970	TC-190	STC-9	NL-44
HS50-LNFR-43	9IHS42050M56	L43	1.97	1.57	1.378	2.480	TC-190	STC-9	NL-44
HS40-LNFR-53API	9IHS4440M62	L53	1.57	1.26	1.063	1.970	TC-250	STC-11	NL-56
HS50-LNFR-53API	9IHS4450M62	L53	1.97	1.57	1.378	2.480	TC-250	STC-11	NL-56
HS40-LNFR-54API	9IHS4440M64	LDS 54	1.57	1.26	1.063	1.970	TC-250	STC-11	H410-1
HS50-LNFR-54API	9IHS4450M64	LDS 54	1.97	1.57	1.378	2.480	TC-250	STC-11	NL-56

*Non API heads only for 8RD, 10RD, 5B75, 5B1 threads. API heads required for rotary shoulder connections threads.




LAYDOWN

INTERNAL BAR LFR/L

Threading & Grooving

Most bars available with coolant port
(ie: Add CP to end of description)

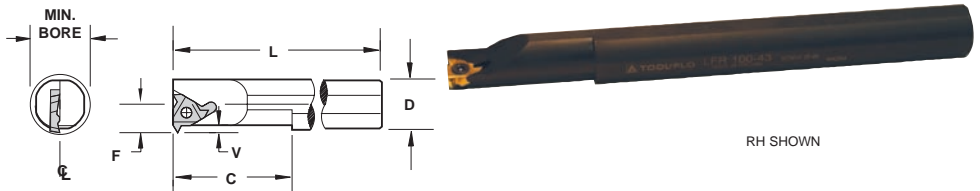


Description	EDP Code	Insert	Min. Bore	L	D	C	F	V	Torx Screw
LFR 625-32	93905248	LPGC 32	.625	8	.625	2-1/2	.312	.100	SF30
LFL 625-32	93805248	LPGC 32	.625	8	.625	2-1/2	.312	.100	SF30
LFR 750-32	93905648	LPGC 32	.750	8	.750	2-3/4	.375	.100	SF30
LFL 750-32	93805648	LPGC 32	.750	8	.750	2-3/4	.375	.100	SF30
LFR 100-32	93906448	LPGC 32	1.000	10	1.000	2-3/4	.500	.100	SF30
LFL 100-32	93806448	LPGC 32	1.000	10	1.000	2-3/4	.500	.100	SF40
LFR 750-42	93905654	LPGC 42	.750	8	.750	2-3/4	.375	.100	SF50
LFL 750-42	93805654	LPGC 42	.750	8	.750	2-3/4	.375	.100	SF60
LFR 100-43	93906456	LPGC 43	1.000	10	1.000	2-3/4	.500	.125	SF60
LFL 100-43	93806456	LPGC 43	1.000	10	1.000	2-3/4	.500	.125	SF60
LFR 125-43	93906856	LPGC 43	1.250	12	1.250	2-3/4	.625	.125	SF60
LFL 125-43	93806856	LPGC 43	1.250	12	1.250	2-3/4	.625	.125	SF60
LFR 150-43	93907256	LPGC 43	1.500	14	1.500	3-3/4	.750	.125	SF60
LFL 150-43	93807256	LPGC 43	1.500	14	1.500	3-3/4	.750	.125	SF60
LFR 200-43	93908056	LPGC 43	2.000	14	2.000	3-3/4	1.000	.125	SF60
LFL 200-43	93808056	LPGC 43	2.000	14	2.000	3-3/4	1.000	.125	SF60
LFR 150-53	93907262	LPGC 53	1.500	14	1.500	3-3/4	.750	.150	SF67
LFL 150-53	93807262	LPGC 53	1.500	14	1.500	3-3/4	.750	.150	SF67
LFR 200-53	93908062	LPGC 53	2.000	14	2.000	3-3/4	1.000	.150	SF85

*Over NV Insert

LNFR/L Threading & Grooving Inch

Most bars available with coolant port
(ie: Add CP to end of description)

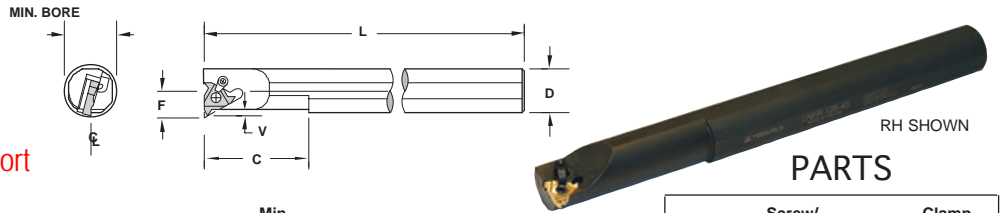

Description	EDP Code	Insert	Min. Bore	L	D	C	F	V*	Seat	Screw/ Lock Pin	Clamp	Clamp Screw
LNFR 100-43	94206456	L43	1.031	10	1	2-3/4	.564	.125	-	TS65	-	-
LNFL 100-43	94106456	L43	1.031	10	1	2-3/4	.564	.125	-	TS65	-	-
LNFR 125-43	94206856	L43	1.250	12	1-1/4	2-3/4	.625	.125	-	NL44	TC190	STC-5
LNFL 125-43	94106856	L43	1.250	12	1-1/4	2-3/4	.625	.125	-	NL44	TC190	STC-5
LNFR 150-43	94207256	L43	1.500	14	1-1/2	3-3/4	.750	.125	-	NL44	TC190	STC-9
LNFL 150-43	94107256	L43	1.500	14	1-1/2	3-3/4	.750	.125	-	NL44	TC190	STC-9
LNFR 200-43	94208056	L43	2.000	14	2	3-3/4	1.000	.125	LS43*	NL46	TC190	STC-9
LNFL 200-43	94108056	L43	2.000	14	2	3-3/4	1.000	.125	LS43*	NL46	TC190	STC-9
LNFR 150-53	94207262	L53	1.500	14	1-1/2	3-3/4	.750	.150	-	NL56	TC250	STC-11
LNFL 150-53	94107262	L53	1.500	14	1-1/2	3-3/4	.750	.150	-	NL56	TC250	STC-11
LNFR 200-53	94208062	L53	2.000	14	2	3-3/4	1.000	.150	LS53*	NL58	TC250	STC-11
LNFL 200-53	94108062	L53	2.000	14	2	3-3/4	1.000	.150	LS53*	NL58	TC250	STC-11
LNFR 150-54	94207264	LDS54	1.500	14	1-1/2	3-3/4	.750	.150	-	NL56	TC250	STC-11
LNFL 150-54	94107264	LDS54	1.500	14	1-1/2	3-3/4	.750	.150	-	NL56	TC250	STC-11
LNFR 200-54	94208064	LDS54	2.000	14	2	3-3/4	1.000	.150	-	NL56	TC250	STC-11
LNFL 200-54	94108064	LDS54	2.000	14	2	3-3/4	1.000	.150	-	NL56	TC250	STC-11

*Seat can be ordered as NO FORM or a FORM can be specified. EX: LS 43 API INT SEAT

** Over Sharp

**Non API bars will work for 8/10RD and 5B75/5B1 threadforms. API bars required for rotary shoulder connection threadforms.

METRIC

Description	EDP Code	Insert	Min. Bore	L	D	C	F	V*	Seat	Screw/ Lock Pin	Clamp	Clamp Screw
LNFR 32M-43	942M3256	L43	35,0	304,8	32,0	69,5	17,5	3,2	-	NL44	TC190	STC-5
LNFL 32M-43	941M3256	L43	35,0	304,8	32,0	69,5	17,5	3,2	-	NL44	TC190	STC-5
LNFR 40M-43	942M4056	L43	43,2	355,6	40,0	95,2	21,6	3,2	-	NL44	TC190	STC-9
LNFL 40M-43	941M4056	L43	43,2	355,6	40,0	95,2	21,6	3,2	-	NL44	TC190	STC-9
LNFR 50M-43	942M5056	L43	54,1	355,6	50,0	101,6	27,0	3,2	LS43*	NL46	TC190	STC-5
LNFL 50M-43	941M5056	L43	54,1	355,6	50,0	101,6	27,0	3,2	LS43*	NL46	TC190	STC-5
LNFR 40M-53	942M4062	L53	44,1	355,6	40,0	101,6	22,0	3,8	-	NL56	TC250	STC-11
LNFL 40M-53	941M4062	L53	44,1	355,6	40,0	101,6	22,0	3,8	-	NL56	TC250	STC-11
LNFR 50M-53	942M5062	L53	54,1	355,6	50,0	101,6	27,4	3,8	LS53*	NL58	TC250	STC-11
LNFL 50M-53	941M5062	L53	54,1	355,6	50,0	101,6	27,4	3,8	LS53*	NL58	TC250	STC-11
LNFR 40M-54	942M4064	LDS54	44,1	355,6	40,0	101,6	22,0	3,8	-	NL56	TC250	STC-11
LNFL 40M-54	941M4064	LDS54	44,1	355,6	40,0	101,6	22,0	3,8	-	NL56	TC250	STC-11
LNFR 50M-54	942M5064	LDS54	54,1	355,6	50,0	101,6	27,4	3,8	-	NL56	TC250	STC-11
LNFL 50M-54	941M5064	LDS54	54,1	355,6	50,0	101,6	27,4	3,8	-	NL56	TC250	STC-11

*Seat can be ordered as NO FORM or a FORM can be specified. EX: LS 43 API INT SEAT

** Over Sharp

**Non API bars will work for 8/10RD and 5B75/5B1 threadforms. API bars required for rotary shoulder connection threadforms.

PARTS

LAYDOWN





INTERNAL BAR

LNFR/L-API

Threading
Inch

Tapered Head for
API Forms

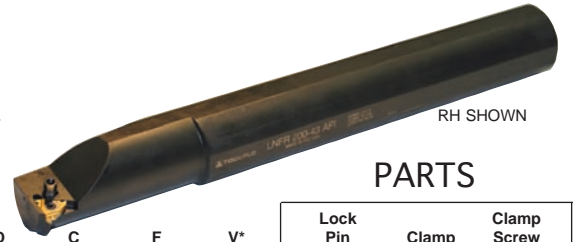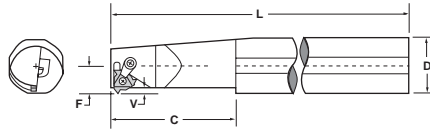

PARTS

Description	EDP Code	Insert	Min. Bore	L	D	C	F	V*	Lock Pin	Clamp	Clamp Screw
LNFR 150-43API	94407256	L43	1.500	14	1-1/2	4-1/2	.750	.167	NL44	TC190	XNS-36
LNFR 200-43API	94408056	L43	2.000	14	2	4-1/2	1.000	.167	NL44	TC190	XNS-36
LNFR 150-53API	94407262	L53	1.500	16	1-1/2	4-1/2	.750	.200	NL56	TC250	STC-11
LNFR 200-53API	94408062	L53	2.000	16	2	4-1/2	1.000	.200	NL56	TC250	STC-11
LNFR 200-54API	94408064	LDS 54	2.000	16	2	4-1/2	1.000	.200	NL56	TC250	STC-11

*Seat can be ordered as NO FORM or a FORM can be specified. EX: LS 43 API INT SEAT if required.

**Required for rotary shoulder connection threading inserts.

METRIC

Description	EDP Code	Insert	Min. Bore	L	D	C	F	V*	Lock Pin	Clamp	Clamp Screw
LNFR 40M-43API	944M4056	L43	41,9	355,6	40,0	114,3	20,9	4,2	NL44	TC190	XNS-36
LNFR 50M-43API	944M5056	L43	55,0	355,6	50,0	114,3	27,4	4,2	NL44	TC190	XNS-36
LNFR 40M-53API	944M4062	L53	42,1	355,6	40,0	114,3	20,9	5,8	NL56	TC250	STC-11
LNFR 50M-53API	944M5062	L53	55,2	406,4	50,0	114,3	27,6	5,8	NL56	TC250	STC-11
LNFR 50M-54API	944M5064	LDS 54	55,2	406,4	50,0	114,3	27,6	5,8	NL56	TC250	STC-11


*Seat can be ordered as NO FORM or a FORM can be specified. EX: LS 43 API INT SEAT if required.

**Required for rotary shoulder connection threading inserts.

PARTS

LNTR/L

Threading

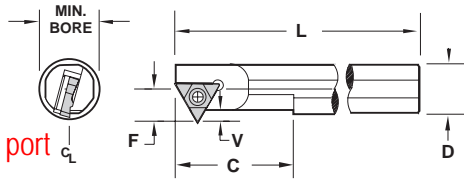



Most bars available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	Min. Bore	L	D	C	F*	V	Torx Screw
LNTR 880-43	94706056	TNPGC 43	.880	8	1.000	2.750	.440	.199	SF60
LNTR 880-43	94606056	TNPGC 43	.880	8	1.000	2.750	.440	.199	SF60
LNTR 100-43	94706456	TNPGC 43	1.000	10	1.000	2.750	.490	.213	SF60
LNTR 100-43	94606456	TNPGC 43	1.000	10	1.000	2.750	.490	.213	SF60
LNTR 125-43	94706856	TNPGC 43	1.250	12	1.250	2.750	.640	.213	SF60
LNTR 125-43	94606856	TNPGC 43	1.250	12	1.250	2.750	.640	.213	SF60
LNTR 150-43	94707256	TNPGC 43	1.500	14	1.500	3.750	.740	.213	SF60
LNTR 150-43	94607256	TNPGC 43	1.500	14	1.500	3.750	.740	.213	SF60
LNTR 200-43	94708056	TNPGC 43	2.000	14	2.000	3.750	.990	.213	SF60
LNTR 200-43	94608056	TNPGC 43	2.000	14	2.000	3.750	.990	.213	SF60

*Over NV Insert

LTR/L

Threading & Grooving

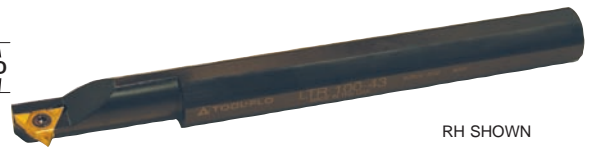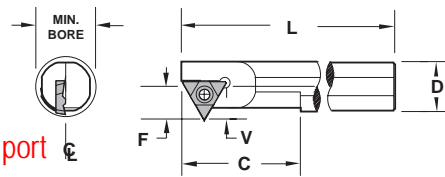

Most bars available with coolant port
(ie: Add CP to end of description)

Description	EDP Code	Insert	Min. Bore	L	D	C	F	V*	Torx Screw
LTR 625-32	95005248	TPGC 32	.625	8	.625	2.500	.375	.150	SF40
LTR 625-32	94905248	TPGC 32	.625	8	.625	2.500	.375	.150	SF40
LTR 750-32	95005648	TPGC 32	.750	8	.750	2.750	.375	.150	SF40
LTR 750-32	94905648	TPGC 32	.750	8	.750	2.750	.375	.150	SF40
LTR 100-32	95006448	TPGC 32	1.000	10	1.000	2.750	.500	.150	SF40
LTR 100-32	94906448	TPGC 32	1.000	10	1.000	2.750	.500	.150	SF40
LTR 750-42	95005654	TPGC 42	.750	8	.750	2.750	.390	.125	SF60
LTR 750-42	94905654	TPGC 42	.750	8	.750	2.750	.390	.125	SF60
LTR 100-43	95006456	TPGC 43	1.000	10	1.000	2.750	.500	.213	SF60
LTR 100-43	94906456	TPGC 43	1.000	10	1.000	2.750	.500	.213	SF60
LTR 125-43	95006856	TPGC 43	1.250	12	1.250	2.750	.625	.213	SF60
LTR 125-43	94906856	TPGC 43	1.250	12	1.250	2.750	.625	.213	SF60
LTR 150-43	95007256	TPGC 43	1.500	14	1.500	3.750	.750	.213	SF60
LTR 150-43	94907256	TPGC 43	1.500	14	1.500	3.750	.750	.213	SF60
LTR 200-43	95008056	TPGC 43	2.000	14	2.000	3.750	1.000	.213	SF60
LTR 200-43	94908056	TPGC 43	2.000	14	2.000	3.750	1.000	.213	SF60
LTR 150-53	95007262	TPGC 53	1.500	14	1.500	3.750	.750	.300	SF85
LTR 150-53	94907262	TPGC 53	1.500	14	1.500	3.750	.750	.300	SF85
LTR 200-53	95008062	TPGC 53	2.000	14	2.000	3.750	1.000	.300	SF85
LTR 200-53	94908062	TPGC 53	2.000	14	2.000	3.750	1.000	.300	SF85

*Over NV Insert



TOOL-FLO



MEDICAL

Manufacturing custom threading inserts and special holders for the medical field for over

35 Years!


All insert styles: whirling inserts
triangle
Flo-Lock (for standard lathe operations)



Grades for Titanium (6AL4V)
stainless steel!

Special Quotes:

(800) 345-2815 or
rfq@toolflo.com

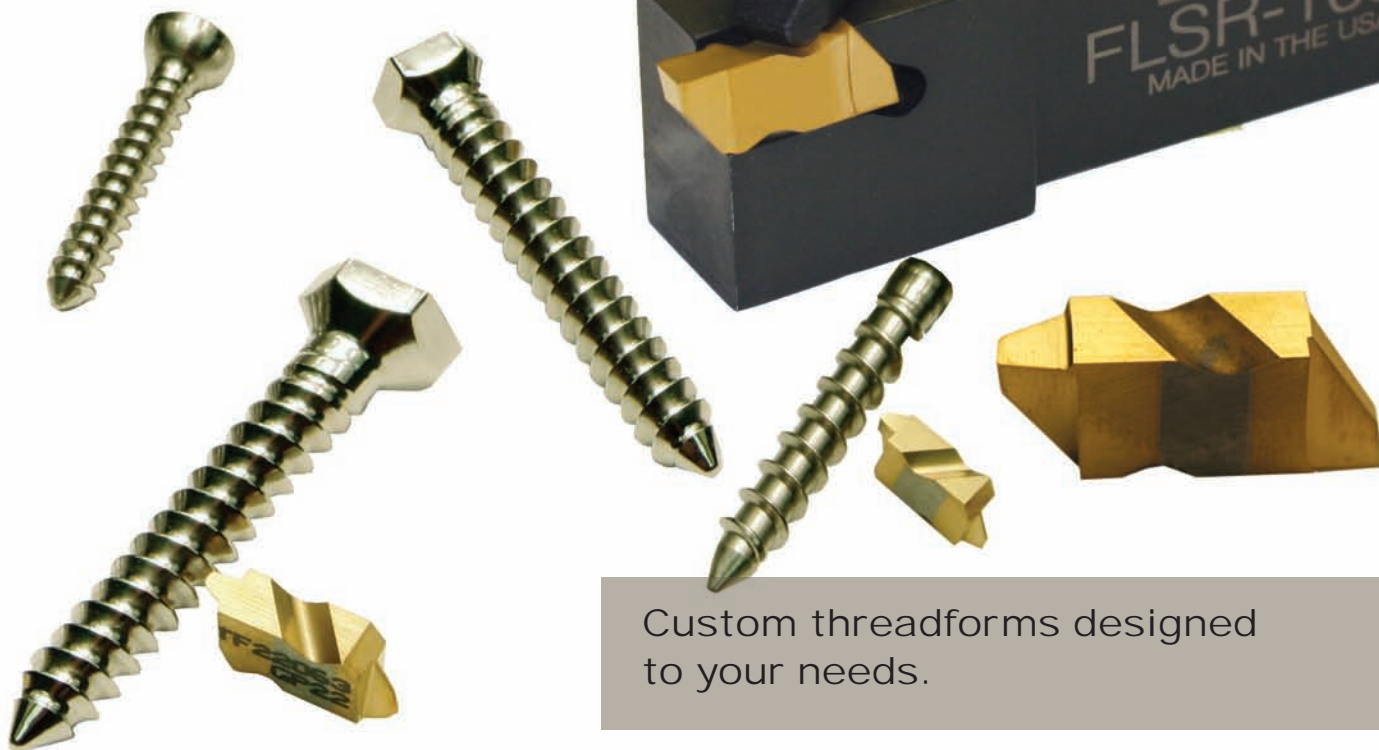

Custom threadforms designed
to your needs.



TOOL-FLO



TOOL-FLO
LNE 322-02
698 17

TOOL-FLO
CR-SB75-4E
TF22675

TOOL-FLO
CR-SR 3E
TF 33417

TOOL-FLO
CR-SR 4E
TF22675


TOOL-FLO
LNCX 1806AZ-R11
ACS T7

MILLING




MILLING INSERTS

APKT




Description	EDP Code	L	W	s	r	GP201	AC202	AG6M	P56M	G55M	P5M	GP5	AC5
APKT 1003PDER-SCM	MAPKT1003SCM	0.413	0.263	0.137	0.019	●	●		●		●		

CDE




Description	EDP Code	l	d	s	r	C56	AC202	AG6M	P56M	G55M	P5M	GP5	AC5
CDE 313-R01	MC31301R	0.375	0.437	0.187	.020 x 45°							●	
CDE 313-R15	MC31305R	0.375	0.437	0.187	0.125							●	
CDE 313-R64	MC31364R	0.375	0.437	0.187	0.060							●	
CDE 322-L02	MC32202L	0.500	0.375	0.150	0.060							●	
CDE 322-L03	MC32203L	0.500	0.375	0.150	0.090							●	●
CDE 322-L04	MC32204L	0.500	0.375	0.150	0.125							●	
CDE 322-L05	MC32205L	0.500	0.375	0.150	0.031	●						●	
CDE 322-R02	MC32202R	0.500	0.375	0.150	0.060							●	
CDE 322-R03	MC32203R	0.500	0.375	0.150	0.090							●	●
CDE 322-R04	MC32204R	0.500	0.375	0.150	0.125							●	
CDE 322-R05	MC32205R	0.500	0.375	0.150	0.031	●						●	
CDE 322-R10	MC32210R	0.500	0.375	0.150	0.015							●	
CDE 323-L05	MC32305L	0.500	0.375	0.187	0.031	●						●	
CDE 323-R01	MC32301R	0.500	0.375	0.187	.020 x 45°							●	
CDE 323-R05	MC32305R	0.500	0.375	0.187	0.031	●						●	
CDE 334-R04	MC33404R	0.750	0.375	0.250	0.030							●	
CDE 334-R09	MC33409R	0.750	0.375	0.250	0.030							●	
CDE 424-R01	MC42401R	0.500	0.562	0.250	.020 x 45°							●	
CDE 424-R22	MC42422R	0.500	0.562	0.250	0.060							●	
CDE 424-R24	MC42424R	0.500	0.562	0.250	0.125							●	

LNCX



Description	EDP Code	l	d	s	b	GP201	AC202	AG6M	P56M	G55M	P5M	GP5	AC5
LNCX 1806AZ-L11	MLNCXL	0.739	0.394	0.250	0.085							●	●
LNCX 1806AZ-R11	MLNCXR	0.739	0.394	0.250	0.085							●	●

LNE




Description	EDP Code	l	d	s	b	C56	AC202	AG6M	P56M	G55M	P5M	GP5	AC5
LNE 323-02	ML323	0.625	0.375	0.187	.030 x 45°							●	
LNE 323-04	ML32304	0.625	0.375	0.187	0.060							●	
LNE 323-88	ML32388	0.625	0.375	0.187	.060 x 45°							●	
LNE 324-01	ML32401	0.625	0.375	0.250	0.060							●	
LNE 324-05	ML32405	0.625	0.375	0.250	.030 x 45°							●	
LNE 324-11	ML32411	0.625	0.375	0.250	0.125							●	
LNE 324-47	ML32447	0.625	0.375	0.250	.060 x 45°							●	
LNE 434-02	ML43402	0.750	0.562	0.187	.030 x 45°	●						●	
LNE 443-01	ML44301	1.000	0.562	0.187	0.093							●	




SEKN

MILLING




Description	EDP Code	I	s	b	b1	AG450	A460	AG501	P56M	G55M	P5M	GP5	AT5
SEKN 42AFSN	MSEKN425N	0.500	0.125	-	-							●	
SEKN 42AFSN-11	MSEKN425N11	0.500	0.125	-	-							●	
SEKN 42AFSN-HCM	MSEKN425NHCM	0.500	0.125	-	-							●	
SEKN 42AFSN-SCM	MSEKN425NSCM	0.500	0.125	-	-							●	
SEKN 53AFSN	MSEKN535N	0.625	0.188	-	-							●	
SEKN 53AFSN-11	MSEKN535N11	0.625	0.188	-	-							●	

SPG



Description	EDP Code	L	L	T	r	GP201	AT202	AG6M	P56M	G55M	P5M	GP5	AT5
SPG 422	MSG422	0.500	0.500	0.125	0.031							●	
SPG 423	MSG423	0.500	0.500	0.125	0.047							●	
SPG 633	MSG633	0.750	0.750	0.187	0.047							●	
SPG 634	MSG634	0.750	0.750	0.187	0.062							●	



TPG



Description	EDP Code	I	T	R	C3	C56	AG6M	P56M	G55M	P5M	GP5	AT5
TPG 321	MTG321	0.620	0.125	0.015		●					●	
TPG 322	MTG322	0.620	0.125	0.031	●	●					●	
TPG 431	MTG431	0.866	0.187	0.015		●					●	
TPG 432	MTG432	0.866	0.187	0.031		●					●	
TPG 433	MTG433	0.866	0.187	0.047		●					●	

MILL GROOVING INSERT


TFMG
Grooving

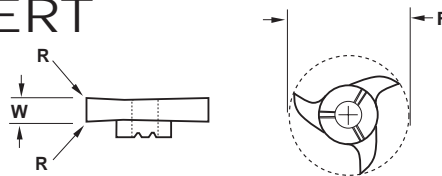

Description	EDP Code	W	D.O.C.	R	F	GP22
TFMG-039W	9MG039O3	0.039	.177	-	0.854	●
TFMG-056W	9MG056O3	0.056	.177	-	0.854	●
TFMG-062W	9MG062O3	0.062	.177	0.008	0.854	●
TFMG-078W	9MG078O3	0.078	.177	0.008	0.854	●
TFMG-094W	9MG094O3	0.094	.177	0.008	0.854	●
TFMG-125W	9MG125O3	0.125	.177	0.008	0.854	●
TFMG-187W	9MG187O3	0.187	.177	0.008	0.854	●
TFMG-250W	9MG250O3	0.250	.177	0.008	0.854	●

MILL GROOVING HOLDER

TFM

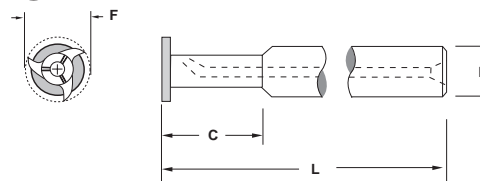

Description	EDP Code	C	L	D	F	Insert Screw
TFM-7-12M-100C	9CMI712M100	Straight shank	100mm	12mm	0.854	SD25
TFM-7-12M-130C	9CMI712M130	Straight shank	130mm	12mm	0.854	SD25
TFM-7-16M-42C	9CMI716M42	42mm	100mm	16mm	0.854	SD25
TFM-7-16M-60C	9CMI716M60	60mm	130mm	16mm	0.854	SD25
TFM-7-16M-85C	9CMI716M85	85mm	160mm	16mm	0.854	SD25
TFM-7-500-394C	9CMI7500394	Straight shank	3.94	0.500	0.854	SD25
TFM-7-500-512C	9CMI7500512	Straight shank	5.12	0.500	0.854	SD25
TFM-7-625-165C	9CMI7625165	1.650	3.94	0.625	0.854	SD25
TFM-7-625-236C	9CMI7625236	2.630	5.12	0.625	0.854	SD25
TFM-7-625-335C	9CMI7625335	3.350	6.30	0.625	0.854	SD25



Mill Grooving - TFMG



Workpiece Group	Recommended Speed & Feed rate - inch/rev (mm/rev)	
	Cutting Speed (sfpm)	Feed Rate (fpt)
Free Machining Carbon Steels	600 - 700	.010 - .016
Plain Carbon Steels	600 - 700	.010 - .016
Alloy Steels 190-330 HB	350 - 450	.010 - .016
Alloy Steels 330-450 HB	350 - 450	.010 - .016
Martensitic/Ferritic Stainless Steel 400 Series	200 - 400	.010 - .016
Austenitic Stainless 300 Series	350 - 550	.010 - .016
Gray Cast Iron 190-330 HB	300 - 350	.012 - .020
Gray Cast Iron 330-450 HB	300	.012 - .020
Alloy / Ductile Irons	200 - 300	.012 - .020
Free Machining Aluminum Alloys	500 - 2300	.012 - .020
High-Silicon Aluminum Alloys	450 - 900	.012 - .020
Copper / Zinc / Brass	120 - 450	.012 - .020
Non-Metallics	120 - 300	.012 - .020
High Temperature Alloys 200-260 HB	100 - 250	.004 - .010
High Temperature Alloys 260-450 HB	80 - 130	.003 - .008
Titanium Alloys (Ti 6Al-4V)	80 - 130	.003 - .008
Hardened Materials 48-65 HRC	---	---

Rigid ▶ Very Rigid*

* For not rigid set ups start at .0005 fpt






TOOL FLO



TOOL-FLO
CR-5B75-4E
TF22575 G50


TOOL-FLO
CR-5B75-4E
TF22575 G50

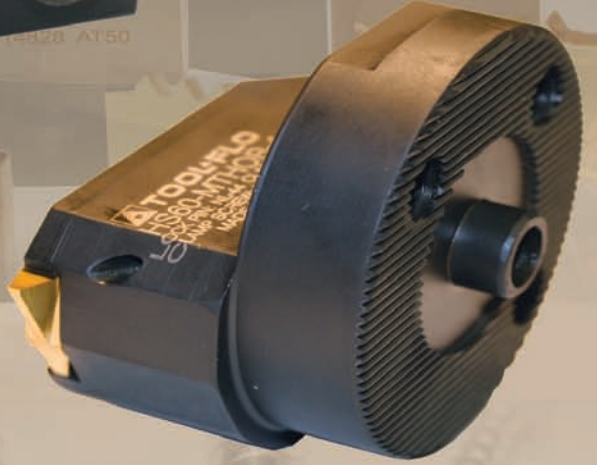

ON EDGE





ACME TNMA Straight hole



Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AITIN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TNMA 32 NT 6P	0208060	6	.0566	.375	.127	●	●	●	●	●	●
TNMA 32 NT 8P	0208080	8	.0411	.375	.127	●	●	●	●	●	●
TNMA 32 NT 10P	0208100	10	.0319	.375	.127			●	●	●	●
TNMA 32 NT 12P	0208120	12	.0283	.375	.127			●	●	●	●
TNMA 32 NT 14P	0208140	14	.0239	.375	.127			●	●	●	●
TNMA 32 NT 16P	0208160	16	.0206	.375	.127			●	●	●	●
TNMA 43 NT 4P	0239040	4	.0875	.500	.189			●	●	●	●
TNMA 43 NT 5P	0239050	5	.0689	.500	.189			●	●	●	●
TNMA 43 NT 6P	0239060	6	.0566	.500	.189			●	●	●	●
TNMA 43 NT 8P	0239080	8	.0411	.500	.189			●	●	●	●
TNMA 43 NT 10P	0239100	10	.0319	.500	.189			●	●	●	●
TNMA 43 NT 12P	0239120	12	.0283	.500	.189			●	●	●	●
TNMA 43 NT 14P	0239140	14	.0239	.500	.189			●	●	●	●
TNMA 43 NT 16P	0239160	16	.0206	.500	.189			●	●	●	●
TNMA 54 NT 3P	0251030	3	.1184	.625	.252			●	●	●	●
TNMA 54 NT 4P	0251040	4	.0875	.625	.252			●	●	●	●
TNMA 54 NT 5P	0251050	5	.0689	.625	.252			●	●	●	●
TNMA 55 NT 2.5P	02550250	2.5	.1431	.625	.312			●	●	●	●
TNMA 66 NT 2P	0279020	2	.1802	.750	.375			●	●	●	●


*Acme threads provided with sharp corners - radius available on a quotation basis.

TNMC Countersink hole



Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AITIN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TNMC 32 NT 6P	0209060	6	.0566	.375	.127			●	●	●	●
TNMC 32 NT 8P	0209080	8	.0411	.375	.127			●	●	●	●
TNMC 32 NT 10P	0209100	10	.0319	.375	.127			●	●	●	●
TNMC 32 NT 12P	0209120	12	.0283	.375	.127			●	●	●	●
TNMC 32 NT 14P	0209140	14	.0239	.375	.127			●	●	●	●
TNMC 32 NT 16P	0209160	16	.0206	.375	.127			●	●	●	●
TNMC 43 NT 4P	0241040	4	.0875	.500	.189			●	●	●	●
TNMC 43 NT 5P	0241050	5	.0689	.500	.189			●	●	●	●
TNMC 43 NT 6P	0241060	6	.0566	.500	.189			●	●	●	●
TNMC 43 NT 8P	0241080	8	.0411	.500	.189			●	●	●	●
TNMC 43 NT 10P	0241100	10	.0319	.500	.189			●	●	●	●
TNMC 43 NT 12P	0241120	12	.0283	.500	.189			●	●	●	●
TNMC 43 NT 14P	0241140	14	.0239	.500	.189			●	●	●	●
TNMC 43 NT 16P	0241160	16	.0206	.500	.189			●	●	●	●
TNMC 54 NT 3P	0253030	3	.1184	.625	.252			●	●	●	●
TNMC 54 NT 4P	0253040	4	.0875	.625	.252			●	●	●	●
TNMC 54 NT 5P	0253050	5	.0689	.625	.252			●	●	●	●
TNMC 55 NT 2.5P	02560250	2.5	.1431	.625	.312			●	●	●	●
TNMC 66 NT 2P	0280020	2	.1802	.750	.375	●		●	●	●	●

TPMA Straight hole - Positive Rake



Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AITIN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TPMA 32 NT 6P	0210060	6	.0566	.375	.127					●	
TPMA 32 NT 8P	0210080	8	.0411	.375	.127					●	
TPMA 32 NT 10P	0210100	10	.0319	.375	.127					●	
TPMA 32 NT 12P	0210120	12	.0283	.375	.127					●	
TPMA 43 NT 4P	0240040	4	.0875	.500	.189					●	
TPMA 43 NT 5P	0240050	5	.0689	.500	.189					●	
TPMA 43 NT 6P	0240060	6	.0566	.500	.189					●	
TPMA 43 NT 8P	0240080	8	.0411	.500	.189					●	

*Acme threads provided with sharp corners - radius available on a quotation basis.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.



- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●
Non-Ferrous	●
Stainless/High Temp	●
Steel	▲



ACME TPMC



Countersink hole - Positive Rake



Description	EDP Code	TPI	W	IC	T	Coating							
						C3	C6H	GP3	GP50	AC3	AC50		
TPMC 32 NT 6P	0211060	6	.0566	.375	.127								
TPMC 32 NT 8P	0211080	8	.0411	.375	.127								
TPMC 32 NT 10P	0211100	10	.0319	.375	.127								
TPMC 32 NT 12P	0211120	12	.0283	.375	.127								
TPMC 43 NT 4P	0242040	4	.0875	.500	.189								
TPMC 43 NT 5P	0242050	5	.0689	.500	.189								
TPMC 43 NT 6P	0242060	6	.0566	.500	.189								
TPMC 43 NT 8P	0242080	8	.0411	.500	.189								

STUB ACME TNMA



Straight hole



Description	EDP Code	TPI	W	IC	T	Coating							
						C3	C6H	GP3	GP50	AC3	AC50		
TNMA 32 NT 6P STUB	0208061	6	.0652	.375	.127								
TNMA 32 NT 8P STUB	0208081	8	.0476	.375	.127								
TNMA 32 NT 10P STUB	0208101	10	.0370	.375	.127								
TNMA 32 NT 12P STUB	0208121	12	.0326	.375	.127								
TNMA 32 NT 14P STUB	0208141	14	.0276	.375	.127								
TNMA 32 NT 16P STUB	0208161	16	.0238	.375	.127								
TNMA 43 NT 4P STUB	0239041	4	.1004	.500	.189								
TNMA 43 NT 5P STUB	0239051	5	.0793	.500	.189								
TNMA 43 NT 6P STUB	0239061	6	.0652	.500	.189								
TNMA 43 NT 8P STUB	0239081	8	.0476	.500	.189								
TNMA 43 NT 10P STUB	0239101	10	.0370	.500	.189								
TNMA 43 NT 12P STUB	0239121	12	.0326	.500	.189								
TNMA 43 NT 14P STUB	0239141	14	.0276	.500	.189								
TNMA 43 NT 16P STUB	0239161	16	.0238	.500	.189								
TNMA 54 NT 3P STUB	0251031	3	.1356	.625	.252								
TNMA 54 NT 4P STUB	0251041	4	.1004	.625	.252								
TNMA 54 NT 5P STUB	0251051	5	.0793	.625	.252								
TNMA 55 NT 2.5P STUB	02550251	2.5	.1638	.625	.312								
TNMA 66 NT 2P STUB	0279021	2	.2060	.750	.375								

TNMC

Countersink hole



Description	EDP Code	TPI	W	IC	T	Coating							
						C3	C6H	GP3	GP50	AC3	AC50		
TNMC 32 NT 6P STUB	0209061	6	.0652	.375	.127								
TNMC 32 NT 8P STUB	0209081	8	.0476	.375	.127								
TNMC 32 NT 10P STUB	0209101	10	.0370	.375	.127								
TNMC 32 NT 12P STUB	0209121	12	.0326	.375	.127								
TNMC 32 NT 14P STUB	0209141	14	.0276	.375	.127								
TNMC 32 NT 16P STUB	0209161	16	.0238	.375	.127								
TNMC 43 NT 4P STUB	0241041	4	.1004	.500	.189								
TNMC 43 NT 5P STUB	0241051	5	.0793	.500	.189								
TNMC 43 NT 6P STUB	0241061	6	.0652	.500	.189								
TNMC 43 NT 8P STUB	0241081	8	.0476	.500	.189								
TNMC 43 NT 10P STUB	0241101	10	.0370	.500	.189								
TNMC 43 NT 12P STUB	0241121	12	.0326	.500	.189								
TNMC 43 NT 14P STUB	0241141	14	.0276	.500	.189								
TNMC 43 NT 16P STUB	0241161	16	.0238	.500	.189								
TNMC 54 NT 3P STUB	0253031	3	.1356	.625	.252								
TNMC 54 NT 4P STUB	0253041	4	.1004	.625	.252								
TNMC 54 NT 5P STUB	0253051	5	.0793	.625	.252								
TNMC 66 NT 2P STUB	0280021	2	.2060	.750	.375								

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron						●
Non-Ferrous						●
Stainless/High Temp						●
Steel						▲



STUB ACME

TPMA



Straight hole - Positive Rake



Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AlTiN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TPMA 32 NT 6P STUB	0210061	6	.0652	.375	.127					●	
TPMA 32 NT 8P STUB	0210081	8	.0476	.375	.127					●	
TPMA 32 NT 10P STUB	0210101	10	.0370	.375	.127					●	
TPMA 32 NT 12P STUB	0210121	12	.0326	.375	.127					●	
TPMA 43 NT 4P STUB	0240041	4	.1004	.500	.189					●	
TPMA 43 NT 5P STUB	0240051	5	.0793	.500	.189					●	
TPMA 43 NT 6P STUB	0240061	6	.0652	.500	.189					●	
TPMA 43 NT 8P STUB	0240081	8	.0476	.500	.189					●	

TPMC

Countersink hole - Positive Rake




Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AlTiN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TPMC 32 NT 6P STUB	0211061	6	.0652	.375	.127					●	
TPMC 32 NT 8P STUB	0211081	8	.0476	.375	.127					●	
TPMC 32 NT 10P STUB	0211101	10	.0370	.375	.127					●	
TPMC 32 NT 12P STUB	0211121	12	.0326	.375	.127					●	
TPMC 43 NT 4P STUB	0242041	4	.1004	.500	.189					●	
TPMC 43 NT 5P STUB	0242051	5	.0793	.500	.189					●	
TPMC 43 NT 6P STUB	0242061	6	.0652	.500	.189					●	
TPMC 43 NT 8P STUB	0242081	8	.0476	.500	.189					●	

PARTIAL TOPPING ACME

TNMA (with corner radii)

Straight hole




Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AlTiN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TNMA 32 NT 6P-PT	0208060PT	6	.0566	.375	.127	●				●	
TNMA 32 NT 8P-PT	0208080PT	8	.0411	.375	.127	●				●	
TNMA 32 NT 10P-PT	0208100PT	10	.0319	.375	.127			●		●	
TNMA 32 NT 12P-PT	0208120PT	12	.0283	.375	.127			●		●	
TNMA 32 NT 14P-PT	0208140PT	14	.0239	.375	.127			●		●	
TNMA 32 NT 16P-PT	0208160PT	16	.0206	.375	.127			●		●	
TNMA 43 NT 4P-PT	0239040PT	4	.0875	.500	.189			●		●	
TNMA 43 NT 5P-PT	0239050PT	5	.0689	.500	.189			●		●	
TNMA 43 NT 6P-PT	0239060PT	6	.0566	.500	.189			●		●	
TNMA 43 NT 8P-PT	0239080PT	8	.0411	.500	.189			●		●	
TNMA 43 NT 10P-PT	0239100PT	10	.0319	.500	.189			●		●	
TNMA 43 NT 12P-PT	0239120PT	12	.0283	.500	.189			●		●	
TNMA 43 NT 14P-PT	0239140PT	14	.0239	.500	.189			●		●	
TNMA 43 NT 16P-PT	0239160PT	16	.0206	.500	.189			●		●	
TNMA 54 NT 3P-PT	0251030PT	3	.1184	.625	.252			●		●	
TNMA 54 NT 4P-PT	0251040PT	4	.0875	.625	.252			●		●	
TNMA 54 NT 5P-PT	0251050PT	5	.0689	.625	.252			●		●	
TNMA 55 NT 2.5P-PT	02550250PT	2.5	.1431	.625	.312			●		●	
TNMA 66 NT 2P-PT	0279020PT	2	.1802	.750	.375			●		●	

*Acme threads provided with sharp corners - radius available on a quotation basis.

TNMC (with corner radii)

Countersink hole



Description	EDP Code	TPI	W	IC	T	Uncoated		TIN Coated		AlTiN Coated	
						C3	C6H	GP3	GP50	AC3	AC50
TNMC 32 NT 6P-PT	0209060PT	6	.0566	.375	.127			●		●	
TNMC 32 NT 8P-PT	0209080PT	8	.0411	.375	.127			●		●	
TNMC 32 NT 10P-PT	0209100PT	10	.0319	.375	.127			●		●	
TNMC 32 NT 12P-PT	0209120PT	12	.0283	.375	.127			●		●	
TNMC 32 NT 14P-PT	0209140PT	14	.0239	.375	.127			●		●	
TNMC 32 NT 16P-PT	0209160PT	16	.0206	.375	.127			●		●	
TNMC 43 NT 4P-PT	0241040PT	4	.0875	.500	.189			●		●	
TNMC 43 NT 5P-PT	0241050PT	5	.0689	.500	.189			●		●	
TNMC 43 NT 6P-PT	0241060PT	6	.0566	.500	.189			●		●	
TNMC 43 NT 8P-PT	0241080PT	8	.0411	.500	.189			●		●	
TNMC 43 NT 10P-PT	0241100PT	10	.0319	.500	.189			●		●	
TNMC 43 NT 12P-PT	0241120PT	12	.0283	.500	.189			●		●	
TNMC 43 NT 14P-PT	0241140PT	14	.0239	.500	.189			●		●	
TNMC 43 NT 16P-PT	0241160PT	16	.0206	.500	.189			●		●	
TNMC 54 NT 3P-PT	0253030PT	3	.1184	.625	.252			●		●	
TNMC 54 NT 4P-PT	0253040PT	4	.0875	.625	.252			●		●	
TNMC 54 NT 5P-PT	0253050PT	5	.0689	.625	.252			●		●	
TNMC 55 NT 2.5P-PT	02560250PT	2.5	.1431	.625	.312			●		●	
TNMC 66 NT 2P-PT	0280020PT	2	.1802	.750	.375			●		●	




ON-EDGE

PARTIAL TOPPING STUB ACME

TNMA (with corner radii)


Straight hole



Description	EDP Code	TPI	W	IC	T	Coating					
						C3	C6H	GP3	GP50	AC3	AC50
TNMA 32 NT 6P STUB-PT	0208061PT	6	.0652	.375	.127			●	●	●	●
TNMA 32 NT 8P STUB-PT	0208081PT	8	.0476	.375	.127			●	●	●	●
TNMA 32 NT 10P STUB-PT	0208101PT	10	.0370	.375	.127			●	●	●	●
TNMA 32 NT 12P STUB-PT	0208121PT	12	.0326	.375	.127			●	●	●	●
TNMA 32 NT 14P STUB-PT	0208141PT	14	.0276	.375	.127			●	●	●	●
TNMA 32 NT 16P STUB-PT	0208161PT	16	.0238	.375	.127			●	●	●	●
TNMA 43 NT 4P STUB-PT	0239041PT	4	.1004	.500	.189			●	●	●	●
TNMA 43 NT 5P STUB-PT	0239051PT	5	.0793	.500	.189			●	●	●	●
TNMA 43 NT 6P STUB-PT	0239061PT	6	.0652	.500	.189			●	●	●	●
TNMA 43 NT 8P STUB-PT	0239081PT	8	.0476	.500	.189			●	●	●	●
TNMA 43 NT 10P STUB-PT	0239101PT	10	.0370	.500	.189			●	●	●	●
TNMA 43 NT 12P STUB-PT	0239121PT	12	.0326	.500	.189			●	●	●	●
TNMA 43 NT 14P STUB-PT	0239141PT	14	.0276	.500	.189			●	●	●	●
TNMA 43 NT 16P STUB-PT	0239161PT	16	.0238	.500	.189			●	●	●	●
TNMA 54 NT 3P STUB-PT	0251031PT	3	.1356	.625	.252			●	●	●	●
TNMA 54 NT 4P STUB-PT	0251041PT	4	.1004	.625	.252			●	●	●	●
TNMA 54 NT 5P STUB-PT	0251051PT	5	.0793	.625	.252			●	●	●	●
TNMA 55 NT 2.5P STUB-PT	02550251PT	2.5	.1638	.625	.312			●	●	●	●
TNMA 66 NT 2P STUB-PT	0279021PT	2	.2060	.750	.375			●	●	●	●

TNMC (with corner radii)

Countersink hole




Description	EDP Code	TPI	W	IC	T	Coating					
						C3	C6H	GP3	GP50	AC3	AC50
TNMC 32 NT 6P STUB-PT	0209061PT	6	.0652	.375	.127			●	●	●	●
TNMC 32 NT 8P STUB-PT	0209081PT	8	.0476	.375	.127			●	●	●	●
TNMC 32 NT 10P STUB-PT	0209101PT	10	.0370	.375	.127			●	●	●	●
TNMC 32 NT 12P STUB-PT	0209121PT	12	.0326	.375	.127			●	●	●	●
TNMC 32 NT 14P STUB-PT	0209141PT	14	.0276	.375	.127			●	●	●	●
TNMC 32 NT 16P STUB-PT	0209161PT	16	.0238	.375	.127			●	●	●	●
TNMC 43 NT 4P STUB-PT	0241041PT	4	.1004	.500	.189			●	●	●	●
TNMC 43 NT 5P STUB-PT	0241051PT	5	.0793	.500	.189			●	●	●	●
TNMC 43 NT 6P STUB-PT	0241061PT	6	.0652	.500	.189			●	●	●	●
TNMC 43 NT 8P STUB-PT	0241081PT	8	.0476	.500	.189			●	●	●	●
TNMC 43 NT 10P STUB-PT	0241101PT	10	.0370	.500	.189			●	●	●	●
TNMC 43 NT 12P STUB-PT	0241121PT	12	.0326	.500	.189			●	●	●	●
TNMC 43 NT 14P STUB-PT	0241141PT	14	.0276	.500	.189			●	●	●	●
TNMC 43 NT 16P STUB-PT	0241161PT	16	.0238	.500	.189			●	●	●	●
TNMC 54 NT 3P STUB-PT	0253031PT	3	.1356	.625	.252			●	●	●	●
TNMC 54 NT 4P STUB-PT	0253041PT	4	.1004	.625	.252			●	●	●	●
TNMC 54 NT 5P STUB-PT	0253051PT	5	.0793	.625	.252			●	●	●	●
TNMC 66 NT 2P STUB-PT	0280021PT	2	.2060	.750	.375			●	●	●	●

AMERICAN STANDARD BUTTRESS

TNMA & TNMC

■ For thread specifications & applications see page

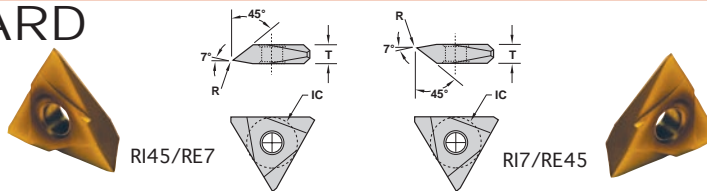


Description	EDP Code	TPI	R	IC	T	Lead Angle	Coating					
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 43 ASB RI45/RE7	403900R008	8-16	.007-.009	.500	.189	45° Internal/7° External			●	●	●	●
TNMA 43 ASB RI7/RE45	393900R008	8-16	.007-.009	.500	.189	7° Internal/45° External			●	●	●	●
TNMA 54 ASB RI45/RE7	405100R010	4-6	.009-.011	.625	.252	45° Internal/7° External			●	●	●	●
TNMA 54 ASB RI7/RE45	395100R010	4-6	.009-.011	.625	.252	7° Internal/45° External			●	●	●	●
TNMC 43 ASB RI45/RE7	404100R008	8-16	.007-.009	.500	.189	45° Internal/7° External			●	●	●	●
TNMC 43 ASB RI7/RE45	394100R008	8-16	.007-.009	.500	.189	7° Internal/45° External			●	●	●	●
TNMC 54 ASB RI45/RE7	405300R010	4-6	.009-.011	.625	.252	45° Internal/7° External			●	●	●	●
TNMC 54 ASB RI7/RE45	395300R010	4-6	.009-.011	.625	.252	7° Internal/45° External			●	●	●	●

API BUTTRESS

TNMA

Straight hole



Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Coating					
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 43 8B75 EXT-FC*	21394F	8	.750	.500	.189	U.S. Improved Buttress			●	●	●	●
TNMA 44 5B75 EXT-FC	16434F	5	.750	.500	.252	4-1/2 - 13-3/8			●	●	●	●
TNMA 54 5B1 EXT-FC	17514F	5	1.000	.625	.252	16 and larger			●	●	●	●
TNMA 54 5B75 EXT-FC	16514F	5	.750	.625	.252	4-1/2 - 13-3/8			●	●	●	●
TNMA 43 8B75 INT-FC	21398F	8	.750	.500	.189	U.S. Improved Buttress			●	●	●	●
TNMA 44 5B75 INT-FC	16438F	5	.750	.500	.252	4-1/2 - 13-3/8			●	●	●	●
TNMA 54 5B1 INT-FC	17518F	5	1.000	.625	.252	16 and larger			●	●	●	●
TNMA 54 5B75 INT-FC	16518F	5	.750	.625	.252	4-1/2 - 13-3/8			●	●	●	●



*FC designates flank clearance.



API BUTTRESS

TNMC

Countersink hole





Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Uncoated		TIN Coated		AlTiN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMC 43 8B75 EXT-FC*	21414F	8	.750	.500	.189	U.S. Improved Buttress				●		
TNMC 54 5B1 EXT-FC	17534F	5	1.000	.625	.252	16 and larger				●		●
TNMC 54 5B75 EXT-FC	16534F	5	.750	.625	.252	4-1/2 - 13-3/8				●		●
TNMC 43 8B75 INT-FC	21418F	8	.750	.500	.189	U.S. Improved Buttress				●		●
TNMC 54 5B1 INT-FC	17538F	5	1.000	.625	.252	16 and larger				●		●
TNMC 54 5B75 INT-FC	16538F	5	.750	.625	.252	4-1/2 - 13-3/8				●		●

*FC designates flank clearance.

API HUGHES H90

TNMA

Straight hole





Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Uncoated		TIN Coated		AlTiN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 55 H902 EXT	28554	3.5	2.000	.625	.312	3-1/2 - 6-5/8 H90				●		
TNMA 55 H903 EXT	29554	3.5	3.000	.625	.312	7 - 8-5/8 H90				●		
TNMA 56 H90S EXT	27Q14	3	1.250	.625	.375	2-3/8 - 3-1/2 Slimline				●		
TNMA 55 H902 INT	28558	3.5	2.000	.625	.312	3-1/2 - 6-5/8 H90				●		
TNMA 55 H903 INT	29558	3.5	3.000	.625	.312	7 - 8-5/8 H90				●		
TNMA 56 H90S INT	27Q18	3	1.250	.625	.375	2-3/8 - 3-1/2 Slimline				●		

API HUGHES H90

TNMC

Countersink hole





Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Uncoated		TIN Coated		AlTiN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMC 55 H902 EXT	28564	3.5	2.000	.625	.312	3-1/2 - 6-5/8 H90				●		
TNMC 55 H903 EXT	29564	3.5	3.000	.625	.312	7 - 8-5/8 H90				●		
TNMC 56 H90S EXT	27Q34	3	1.250	.625	.375	2-3/8 - 3-1/2 Slimline				●		
TNMC 55 H902 INT	28568	3.5	2.000	.625	.312	3-1/2 - 6-5/8 H90				●		
TNMC 55 H903 INT	29568	3.5	3.000	.625	.312	7 - 8-5/8 H90				●		
TNMC 56 H90S INT	27Q38	3	1.250	.625	.375	2-3/8 - 3-1/2 Slimline				●		

API ROTARY SHOULDER CONNECTION

TNMA

Straight hole

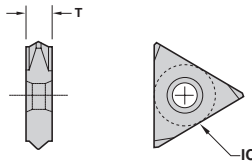

Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Uncoated		TIN Coated		AlTiN Coated	
							C3	C6H	GP3	GP50	AC3	AC50
TNMA 54 530 EXT	13514	5	3	.625	.252	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●		●
TNMA 55 425 EXT	09554	4	2	.625	.312	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.				●		●
TNMA 55 428 EXT	10554	4	2	.625	.312	NC23 - NC50, 2-3/8 - 5-1/2				●		●
TNMA 55 42F EXT*	14554	4	2	.625	.312	VO.065*				●		●
TNMA 55 435 EXT	11554	4	3	.625	.312	5-1/2, 7-5/8, 8-5/8 Reg.				●		●
TNMA 55 438 EXT	12554	4	3	.625	.312	NC56 - NC71				●		●
TNMA 55 530 EXT	13554	5	3	.625	.312	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●		●
TNMA 55 4PAC EXT	15554	4	1.5	.625	.312	American Open Hole				●		●
TNMA 54 530 INT	13518	5	3	.625	.252	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●		●
TNMA 55 425 INT	09558	4	2	.625	.312	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.				●		●
TNMA 55 428 INT	10558	4	2	.625	.312	NC23 - NC50, 2-3/8 - 5-1/2				●		●
TNMA 55 42F INT*	14558	4	2	.625	.312	VO.065*				●		●
TNMA 55 435 INT	11558	4	3	.625	.312	5-1/2, 7-5/8, 8-5/8 Reg.				●		●
TNMA 55 438 INT	12558	4	3	.625	.312	NC56 - NC71				●		●
TNMA 55 530 INT	13558	5	3	.625	.312	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●		●
TNMA 55 4PAC INT	15558	4	1.5	.625	.312	American Open Hole				●		●

*Obsolete thread form - see API Spec 7, 35th Edition, May 1, 1985 Section 9.4.

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron						
Non-Ferrous						
Stainless/High Temp						
Steel				▲		●




ON-EDGE

API ROTARY SHOULDER CONNECTION

TNMC

Countersink hole

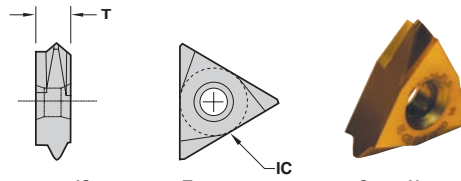


Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Coating						
							C3	C6H	GP3	GP50	AC3	AC50	
TNMC 54 530 EXT	13534	5	3	.625	.252	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●	●	●	●
TNMC 55 425 EXT	09564	4	2	.625	.312	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.				●	●	●	●
TNMC 55 428 EXT	10564	4	2	.625	.312	NC23 - NC50, 2-3/8 - 5-1/2				●	●	●	●
TNMC 55 42F EXT*	14564	4	2	.625	.312	VO.065*				●	●	●	●
TNMC 55 435 EXT	11564	4	3	.625	.312	5-1/2, 7-5/8, 8-5/8 Reg.				●	●	●	●
TNMC 55 438 EXT	12564	4	3	.625	.312	NC56 - NC71				●	●	●	●
TNMC 55 530 EXT	13564	5	3	.625	.312	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●	●	●	●
TNMC 55 4PAC EXT	15564	4	1.5	.625	.312	American Open Hole				●	●	●	●
TNMC 54 530 INT	13538	5	3	.625	.252	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●	●	●	●
TNMC 55 425 INT	09568	4	2	.625	.312	5-1/2 FH, 6-5/8 FH, 6-5/8 Reg.				●	●	●	●
TNMC 55 428 INT	10568	4	2	.625	.312	NC23 - NC50, 2-3/8 - 5-1/2				●	●	●	●
TNMC 55 42F INT*	14568	4	2	.625	.312	VO.065*				●	●	●	●
TNMC 55 435 INT	11568	4	3	.625	.312	5-1/2, 7-5/8, 8-5/8 Reg.				●	●	●	●
TNMC 55 438 INT	12568	4	3	.625	.312	NC56 - NC71				●	●	●	●
TNMC 55 530 INT	13568	5	3	.625	.312	3-1/2 FH, 2-3/8 - 4-1/2 Reg.				●	●	●	●
TNMC 55 4PAC INT	15568	4	1.5	.625	.312	American Open Hole				●	●	●	●

*Obsolescent thread form - see API Spec 7, 35th Edition, May 1, 1985 Section 9.4.

API ROUND

TNMA


Straight hole

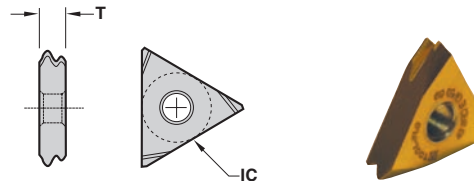

Description	EDP Code	TPI	TPF	IC	T	Coating						
						C3	C6H	GP3	GP50	AC3	AC50	
TNMA 43 8RD EXT	32394	8	.750	.500	.189				●	●	●	●
TNMA 43 10RD EXT	34394	10	.750	.500	.189				●	●	●	●
TNMA 54 8RD EXT	32514	8	.750	.625	.252				●	●	●	●
TNMA 43 8RD INT	32398	8	.750	.500	.189				●	●	●	●
TNMA 43 10RD INT	34398	10	.750	.500	.189				●	●	●	●
TNMA 54 8RD INT	32518	8	.750	.625	.252				●	●	●	●

TNMC

Countersink hole

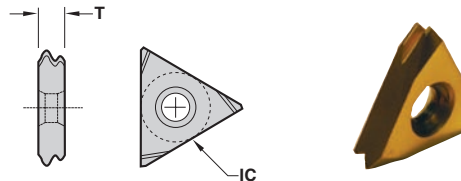


Description	EDP Code	TPI	TPF	IC	T	Coating						
						C3	C6H	GP3	GP50	AC3	AC50	
TNMC 43 8RD EXT	32414	8	.750	.500	.189				●	●	●	●
TNMC 43 10RD EXT	34414	10	.750	.500	.189				●	●	●	●
TNMC 54 8RD EXT	32534	8	.750	.625	.252				●	●	●	●
TNMC 43 8RD INT	32418	8	.750	.500	.189				●	●	●	●
TNMC 43 10RD INT	34418	10	.750	.500	.189				●	●	●	●
TNMC 54 8RD INT	32538	8	.750	.625	.252				●	●	●	●

API VAM

TNMA

Straight hole

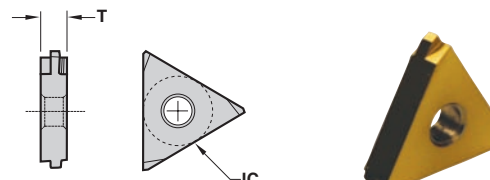

Description	EDP Code	TPI	TPF	IC	T	Coating						
						C3	C6H	GP3	GP50	AC3	AC50	
TNMA 43 6VAM EXT	24394	6	.750	.500	.189				●	●	●	●
TNMA 43 8VAM EXT	25394	8	.750	.500	.189				●	●	●	●
TNMA 54 5VAM EXT	23514	5	.750	.625	.252				●	●	●	●
TNMA 43 6VAM INT	24398	6	.750	.500	.189				●	●	●	●
TNMA 43 8VAM INT	25398	8	.750	.500	.189				●	●	●	●
TNMA 54 5VAM INT	23518	5	.750	.625	.252				●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel


ON-EDGE



API X-LINE

TNMA

Straight hole




Description	EDP Code	TPI	TPF	IC	T	Conn. No.	Coatings							
							C3	C6H	GP3	GP50	AC3	AC50		
TNMA 54 5XL12 EXT	18514	5	1.250	.625	.252	8-5/8 - 10-3/4								
TNMA 54 6XL15 EXT	19514	6	1.500	.625	.252	5 - 7-5/8				●				
TNMA 54 6XL75 EXT	20514	6	.750	.625	.252	-				●				
TNMA 54 5XL12 INT	18518	5	1.250	.625	.252	8-5/8 - 10-3/4								
TNMA 54 6XL15 INT	19518	6	1.500	.625	.252	5 - 7-5/8				●				
TNMA 54 6XL75 INT	20518	6	.750	.625	.252	-				●				

GROOVING

TNEB



Small Diameter

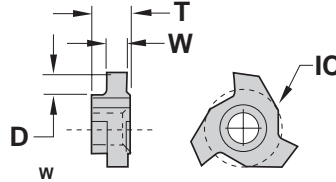

Description	EDP Code	Inch	Metric	D	IC	T	Coatings							
							C3	C6H	GP3	GP5	AC3	AC50		
TNEB 2.52 NGL-40 W.125	LD512500	.125	3,18	.070	.312	.125								
TNEB 33 NGL-40 W.062	L1206200	.062	1,57	.120	.375	.187				●				
TNEB 33 NGL-40 W.094	L1209400	.094	2,39	.120	.375	.187				●				
TNEB 33 NGL-40 W.125	L1212500	.125	3,18	.120	.375	.187				●				
TNEB 33 NGL-40 W.187	L1218700	.187	4,75	.120	.375	.187				●				

TNMA

Straight hole

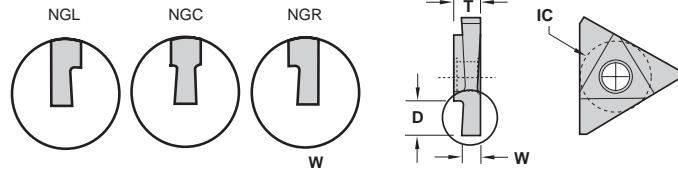

Description	EDP Code	Inch	Metric	D	IC	T	Coatings					
							C25	C6H	GP3	GP50	AC3	AC50
TNMA 32 NGC W.062	C0806200	.062	1,57	.150	.375	.127			●	●		●
TNMA 32 NGC W.094	C0809400	.094	2,39	.150	.375	.127			●	●		●
TNMA 32 NG W.125	C0912500	.125	3,18	.150	.375	.127			●	●		●
TNMA 33 NG W.187	CK318700	.187	4,75	.150	.375	.189			●	●		●
TNMA 43 NGC W.062	C3906200	.062	1,57	.156	.500	.189			●	●		●
TNMA 43 NGC W.094	C3909400	.094	2,39	.215	.500	.189			●	●		●
TNMA 43 NGC W.125	C3912500	.125	3,18	.215	.500	.189			●	●		●
TNMA 43 NGC W.156	C3915600	.156	3,96	.215	.500	.189			●	●		●
TNMA 43 NG W.187	C3918700	.187	4,75	.215	.500	.189		●	●	●		●
TNMA 44 NG W.250	C4325000	.250	6,35	.215	.500	.250			●	●		●
TNMA 54 NGC W.125	C5112500	.125	3,18	.275	.625	.252			●	●		●
TNMA 54 NGC W.187	C5118700	.187	4,75	.275	.625	.252			●	●		●
TNMA 54 NG W.250	C5125000	.250	6,35	.275	.625	.252			●	●		●
TNMA 55 NG W.312	C5531200	.312	7,92	.275	.625	.312				●		●
TNMA 64 NG W.250	C7425000	.250	6,35	.335	.750	.250				●		●
TNMA 66 NG W.375	C7937500	.375	9,53	.335	.750	.375				●		●
TNMA 67 NG W.437	C8343700	.437	11,10	.335	.750	.437				●		●
TNMA 69 NG W.562	C8856200	.562	14,27	.335	.750	.562				●		●
TNMA 32 NGL W.062	L0806200	.062	1,57	.150	.375	.127				●		●
TNMA 32 NGL W.094	L0809400	.094	2,39	.150	.375	.127				●		●
TNMA 43 NGL W.062	L3906200	.062	1,57	.156	.500	.189				●		●
TNMA 43 NGL W.094	L3909400	.094	2,39	.215	.500	.189				●		●
TNMA 43 NGL W.125	L3912500	.125	3,18	.215	.500	.189				●		●
TNMA 43 NGL W.156	L3915600	.156	3,96	.215	.500	.189				●		●
TNMA 54 NGL W.125	L5112500	.125	3,18	.275	.625	.252				●		●
TNMA 54 NGL W.187	L5118700	.187	4,75	.275	.625	.252				●		●
TNMA 32 NGR W.062	R0806200	.062	1,57	.150	.375	.127			●	●		●
TNMA 32 NGR W.094	R0809400	.094	2,39	.150	.375	.127			●	●		●
TNMA 43 NGR W.062	R3906200	.062	1,57	.156	.500	.189			●	●		●
TNMA 43 NGR W.094	R3909400	.094	2,39	.215	.500	.189			●	●		●
TNMA 43 NGR W.125	R3912500	.125	3,18	.215	.500	.189			●	●		●
TNMA 43 NGR W.156	R3915600	.156	3,96	.215	.500	.189			●	●		●
TNMA 54 NGR W.125	R5112500	.125	3,18	.275	.625	.252			●	●		●
TNMA 54 NGR W.187	R5118700	.187	4,75	.275	.625	.252			●	●		●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.



Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron						●
Non-Ferrous						●
Stainless/High Temp						●
Steel					▲	●



GROOVING

TNMC



Countersink hole

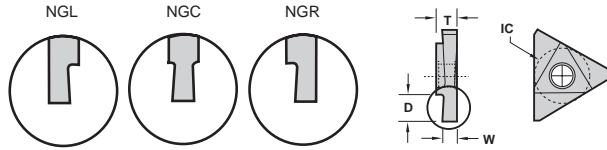

Description	EDP Code	Inch	Metric	D	IC	T	Coatings						
							C3	C6H	GP3	GP50	AC3	AC50	
TNMC 32 NGC W.062	C0906200	.062	1,57	.150	.375	.127							
TNMC 32 NGC W.094	C0909400	.094	2,39	.150	.375	.127			●	●	●	●	●
TNMC 32 NG W.125	C0912500	.125	3,18	.150	.375	.127			●	●	●	●	●
TNMC 33 NG W.187	CK818700	.187	4,75	.150	.375	.189				●	●	●	●
TNMC 43 NGC W.062	C4106200	.062	1,57	.156	.500	.189			●	●	●	●	●
TNMC 43 NGC W.094	C4109400	.094	2,39	.215	.500	.189			●	●	●	●	●
TNMC 43 NGC W.125	C4112500	.125	3,18	.215	.500	.189			●	●	●	●	●
TNMC 43 NGC W.156	C4115600	.156	3,96	.215	.500	.189			●	●	●	●	●
TNMC 43 NG W.187	C4118700	.187	4,75	.215	.500	.189			●	●	●	●	●
TNMC 44 NG W.250	C4425000	.250	6,35	.215	.500	.250				●	●	●	●
TNMC 54 NGC W.125	C5312500	.125	3,18	.275	.625	.252			●	●	●	●	●
TNMC 54 NGC W.187	C5318700	.187	4,75	.275	.625	.252			●	●	●	●	●
TNMC 54 NG W.250	C5325000	.250	6,35	.275	.625	.252	●		●	●	●	●	●
TNMC 55 NG W.312	C5631200	.312	7,92	.275	.625	.312				●	●	●	●
TNMC 64 NG W.250	C7525000	.250	6,35	.335	.750	.250				●	●	●	●
TNMC 66 NG W.375	C8037500	.375	9,53	.335	.750	.375				●	●	●	●
TNMC 67 NG W.437	C8443700	.437	11,10	.335	.750	.437				●	●	●	●
TNMC 69 NG W.562	C8956200	.562	14,27	.335	.750	.562				●	●	●	●
TNMC 32 NGL W.062	L0906200	.062	1,57	.150	.375	.127				●	●	●	●
TNMC 32 NGL W.094	L0909400	.094	2,39	.150	.375	.127				●	●	●	●
TNMC 43 NGL W.062	L4106200	.062	1,57	.156	.500	.189				●	●	●	●
TNMC 43 NGL W.094	L4109400	.094	2,39	.215	.500	.189				●	●	●	●
TNMC 43 NGL W.125	L4112500	.125	3,18	.215	.500	.189				●	●	●	●
TNMC 43 NGL W.156	L4115600	.156	3,96	.215	.500	.189				●	●	●	●
TNMC 54 NGL W.125	L5312500	.125	3,18	.275	.625	.252				●	●	●	●
TNMC 54 NGL W.187	L5318700	.187	4,75	.275	.625	.252				●	●	●	●
TNMC 32 NGR W.062	R0906200	.062	1,57	.150	.375	.127			●	●	●	●	●
TNMC 32 NGR W.094	R0909400	.094	2,39	.150	.375	.127			●	●	●	●	●
TNMC 43 NGR W.062	R4106200	.062	1,57	.156	.500	.189			●	●	●	●	●
TNMC 43 NGR W.094	R4109400	.094	2,39	.215	.500	.189			●	●	●	●	●
TNMC 43 NGR W.125	R4112500	.125	3,18	.215	.500	.189			●	●	●	●	●
TNMC 43 NGR W.156	R4115600	.156	3,96	.215	.500	.189			●	●	●	●	●
TNMC 54 NGR W.125	R5312500	.125	3,18	.275	.625	.252			●	●	●	●	●
TNMC 54 NGR W.187	R5318700	.187	4,75	.275	.625	.252			●	●	●	●	●

TPMA

Straight hole - Positive Rake

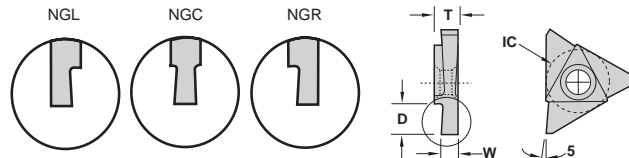

Description	EDP Code	Inch	Metric	D	IC	T	Coatings						
							C3	C6H	GP3	GP50	AC3	AC50	
TPMA 32 NGC W.062	C1006200	.062	1,57	.150	.375	.127							
TPMA 32 NGC W.094	C1009400	.094	2,39	.150	.375	.127				●	●	●	●
TPMA 32 NG W.125	C1012500	.125	3,18	.150	.375	.127				●	●	●	●
TPMA 33 NG W.187	CL318700	.187	4,75	.150	.375	.189				●	●	●	●
TPMA 43 NGC W.062	C4006200	.062	1,57	.156	.500	.189				●	●	●	●
TPMA 43 NGC W.094	C4009400	.094	2,39	.215	.500	.189				●	●	●	●
TPMA 43 NGC W.125	C4012500	.125	3,18	.215	.500	.189				●	●	●	●
TPMA 43 NG W.187	C4018700	.187	4,75	.215	.500	.189				●	●	●	●
TPMA 44 NG W.250	C4525000	.250	6,35	.215	.500	.250				●	●	●	●
TPMA 54 NG W.250	C5225000	.250	6,35	.275	.625	.252				●	●	●	●
TPMA 55 NG W.312	C5631200	.312	7,92	.275	.625	.312				●	●	●	●
TPMA 32 NGR W.062	R1006200	.062	1,57	.150	.375	.127			●	●	●	●	●
TPMA 32 NGR W.094	R1009400	.094	2,39	.150	.375	.127			●	●	●	●	●
TPMA 43 NGR W.062	R4006200	.062	1,57	.156	.500	.189			●	●	●	●	●
TPMA 43 NGR W.094	R4009400	.094	2,39	.215	.500	.189			●	●	●	●	●
TPMA 43 NGR W.125	R4012500	.125	3,18	.215	.500	.189			●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Material	C3	C6H	GP3	GP50	AC3	AC50
Cast Iron			●			
Non-Ferrous			●			
Stainless/High Temp			●			
Steel				▲		●



GROOVING

TPMC

Countersink hole - Positive Rake

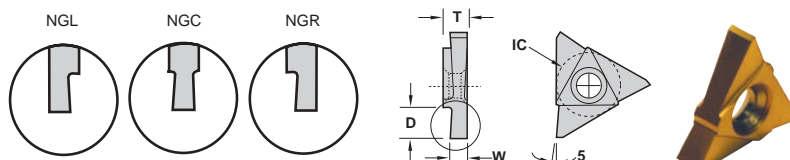


Description	EDP Code	Inch	Metric	D	IC	T	Finish						
							C3	C6H	GP3	GP50	AC3	AC50	
TPMC 32 NGC W.062	C1106200	.062	1,57	.150	.375	.127				●			
TPMC 32 NGC W.094	C1109400	.094	2,39	.150	.375	.127				●			
TPMC 32 NG W.125	C1112500	.125	3,18	.150	.375	.127				●			
TPMC 33 NG W.187	CL818700	.187	4,75	.150	.375	.189				●			
TPMC 43 NGC W.062	C4206200	.062	1,57	.156	.500	.189				●			
TPMC 43 NGC W.094	C4209400	.094	2,39	.215	.500	.189				●			
TPMC 43 NGC W.125	C4212500	.125	3,18	.215	.500	.189				●			
TPMC 43 NG W.187	C4218700	.187	4,75	.215	.500	.189				●			
TPMC 44 NG W.250	C4625000	.250	6,35	.215	.500	.250				●			
TPMC 54 NG W.250	C5425000	.250	6,35	.275	.625	.252				●			
TPMC 55 NG W.312	CP631200	.312	7,92	.275	.625	.312				●			
TPMC 32 NGL W.062	L1106200	.062	1,57	.150	.375	.127				●			
TPMC 32 NGL W.094	L1109400	.094	2,39	.150	.375	.127				●			
TPMC 43 NGL W.062	L4206200	.062	1,57	.156	.500	.189				●			
TPMC 43 NGL W.094	L4209400	.094	2,39	.215	.500	.189				●			
TPMC 43 NGL W.125	L4212500	.125	3,18	.215	.500	.189				●			
TPMC 32 NGR W.062	R1106200	.062	1,57	.150	.375	.127				●			
TPMC 32 NGR W.094	R1109400	.094	2,39	.150	.375	.127				●			
TPMC 43 NGR W.062	R4206200	.062	1,57	.156	.500	.189				●			
TPMC 43 NGR W.094	R4209400	.094	2,39	.215	.500	.189				●			
TPMC 43 NGR W.125	R4212500	.125	3,18	.215	.500	.189				●			

NPT

TNMA


Straight hole

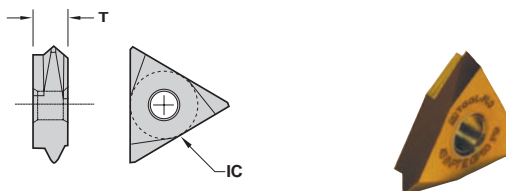

Description	EDP Code	Pipe Size	TPI	TPF	IC	T	Finish						
							C3	C6H	GP3	GP50	AC3	AC50	
TNMA 43 8NPT EXT	3639084	2.5" and up	8	.750	.500	.189				●			
TNMA 43 11.5NPT EXT	3639114	1" - 2"	11.5	.750	.500	.189				●			
TNMA 43 8NPT INT	3639088	2.5" and up	8	.750	.500	.189				●			
TNMA 43 11.5NPT INT	3639118	1" - 2"	11.5	.750	.500	.189				●			

TNMC

Countersink hole

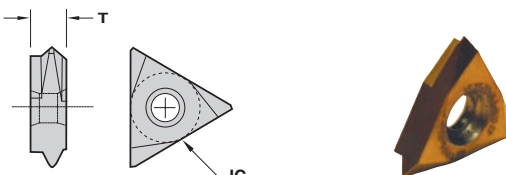


Description	EDP Code	Pipe Size	TPI	TPF	IC	T	Finish						
							C3	C6H	GP3	GP50	AC3	AC50	
TNMC 43 8NPT EXT	3641084	2.5" and up	8	.750	.500	.189				●			
TNMC 43 11.5NPT EXT	3641114	1" - 2"	11.5	.750	.500	.189				●			
TNMC 43 8NPT INT	3641088	2.5" and up	8	.750	.500	.189				●			
TNMC 43 11.5NPT INT	3641118	1" - 2"	11.5	.750	.500	.189				●			

60° V-THREADING

TNEB

Small Diameter

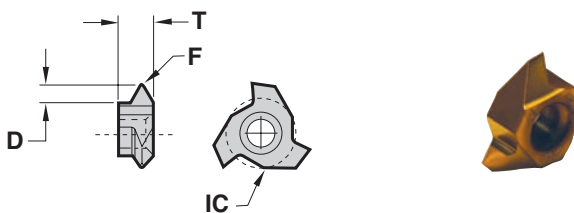

Description	EDP Code	TPI	F	IC	T	Finish						
						C3	C6H	GP3	GP5	AC3	AC50	
TNEB 2.52 NVL-40	01D5000	7-32	.003/.005	.312	.125				●			
TNEB 33 NVL-40	0112000	5-16	.003/.005	.375	.187				●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Cast Iron						
Non-Ferrous						
Stainless/High Temp						
Steel			●			



60° V-THREADING

TNMA


Straight hole



Description	EDP Code	TPI	F or R	IC	T	Coating									
						Uncoated	TIN Coated	AITIN Coated	C25	GP4	GP3	GP50	AC3	AC50	
TNMA 32 NV	0108000	8-36	.003/.005 Flat	.375	.127										
TNMA 43 NV	0139000	5-24	.005/.007 Flat	.500	.189	●									
TNMA 43 NV .010R	0139R10	4-20	.010 Radius	.500	.189										
TNMA 44 NV	0143000	4-24	.005/.009 Flat	.500	.250										
TNMA 54 NV	0151000	4-20	.008/.010 Flat	.625	.252	●	●								
TNMA 54 NV .010R	0151R10	4-20	.010 Radius	.625	.252										
TNMA 54 NV .020R	0151R20	4-12	.020 Radius	.625	.252										
TNMA 54 NV .025R	0151R25	4-8	.025 Radius	.625	.252										
TNMA 54 NV .038R	0151R38	4-6	.038 Radius	.625	.252										
TNMA 64 NV	0174000	4-20	.008/.010 Flat	.750	.252										
TNMA 66 NV	0179000	3-12	.008/.010 Flat	.750	.375										

TNMC



Countersink hole



Description	EDP Code	TPI	F or R	IC	T	Coating									
						Uncoated	TIN Coated	AITIN Coated	C25	GP4	GP3	GP50	AC3	AC50	
TNMC 32 NV	0109000	8-36	.003/.005 Flat	.375	.127	●									
TNMC 43 NV	0141000	5-24	.005/.007 Flat	.500	.189	●									
TNMC 43 NV .010R	0141R10	4-20	.010 Radius	.500	.189										
TNMC 44 NV	0144000	4-24	.003/.005 Flat	.500	.250										
TNMC 54 NV	0153000	4-20	.008/.010 Flat	.625	.252	●	●								
TNMC 54 NV .010R	0153R10	4-20	.010 Radius	.625	.252										
TNMC 54 NV .020R	0153R20	4-12	.020 Radius	.625	.252										
TNMC 54 NV .025R	0153R25	4-8	.025 Radius	.625	.252										
TNMC 54 NV .038R	0153R38	4-6	.038 Radius	.625	.252										
TNMC 64 NV	0175000	4-20	.008/.010 Flat	.750	.252										
TNMC 66 NV	0180000	3-12	.008/.010 Flat	.750	.375										

TPMA


Straight hole - Positive Rake



Description	EDP Code	TPI	F	A°	IC	T	Coating								
							Uncoated	TIN Coated	AITIN Coated	C25	C6H	GP3	GP50	AC3	AC50
TPMA 32 NV	0110000	8-36	.003/.005	5	.375	.127									
TPMA 32 NV-10	0110100	8-36	.003/.005	10	.375	.127									
TPMA 43 NV	0140000	5-24	.005/.007	5	.500	.189	●								
TPMA 43 NV-10	0140100	5-24	.005/.007	10	.500	.189									
TPMA 54 NV	0152000	4-20	.008/.010	5	.500	.252									
TPMA 66 NV	0181000	3-12	.008/.010	5	.750	.375									

TPMC


Countersink hole - Positive Rake



Description	EDP Code	TPI	F	A°	IC	T	Coating								
							Uncoated	TIN Coated	AITIN Coated	C3	C6H	GP3	GP50	AC3	AC50
TPMC 32 NV	0111000	8-36	.003/.005	5	.375	.127									
TPMC 32 NV-10	0111100	8-36	.003/.005	10	.375	.127									
TPMC 43 NV	0142000	5-24	.005/.007	5	.500	.189									
TPMC 43 NV-10	0142100	5-24	.003/.005	10	.500	.189									
TPMC 54 NV	0154000	4-20	.008/.010	5	.500	.252									
TPMC 66 NV	0182000	3-12	.008/.010	5	.750	.375									

55° WHITWORTH

TNMA/C



Description	EDP Code	TPI	F	IC	T	Coating									
						Uncoated	TIN Coated	AITIN Coated	C3	C6H	GP3	GP50	AC3	AC50	
TNMA 43 NV-55	0139055	5-24	.005/.007	.500	.189										
TNMC 43 NV-55	0141055	5-24	.005/.007	.500	.189										

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

- ▲ Cast Iron
- ▲ Non-Ferrous
- ▲ Stainless/High Temp
- ▲ Steel




EXTERNAL HOLDER

MTHOR/L

Threading/Grooving

Most holders available with coolant port
(ie: Add CP to end of description)

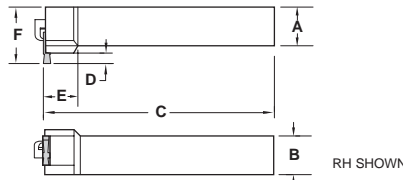

PARTS


Description	EDP Code	Insert	A	B	C	D	E	F	Lock	Clamp	Clamp
									Pin	Clamp	Screw
MTHOR-164	95501656	T_MA/C 43	1	1	6	.19	.74	1.5	NL44	TC-250	STC11
MTHOL-164	95401656	T_MA/C 43	1	1	6	.19	.74	1.5	NL44	TC-250	STC11
MTHOR-204	95502056	T_MA/C 43	1-1/4	1-1/4	7	.19	.99	1.75	NL44	TC-250	STC11
MTHOR-165	95501664	T_MA/C 54	1	1	6	.24	.99	1.5	NL56	TC-250	STC11
MTHOL-165	95401664	T_MA/C 54	1	1	6	.24	.99	1.5	NL56	TC-250	STC11
MTHOR-205	95502064	T_MA/C 54	1-1/4	1-1/4	7	.24	.99	1.75	NL56	TC-250	STC11

MTVOR/L

Threading/Grooving

Inch

Most holders available with coolant port
(ie: Add CP to end of description)

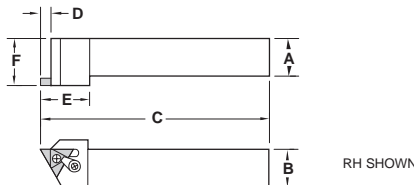

PARTS

Description	EDP Code	Insert	A	B	C	D	E	F	Lock	Clamp	Clamp
									Pin	Clamp	Screw
MTVOR-123	96001248	T_MA/C 32	3/4	3/4	4-1/2	.15	1.08	1.00	NL33	TC-190	STC5
MTVOL-123	95901248	T_MA/C 32	3/4	3/4	4-1/2	.15	1.08	1.00	NL33	TC-190	STC5
MTVOR-163	96001648	T_MA/C 32	1	1	6	.15	1.08	1.25	NL33	TC-190	STC9
MTVOL-163	95901648	T_MA/C 32	1	1	6	.15	1.08	1.25	NL33	TC-190	STC9
MTVOR-124	96001256	T_MA/C 43	3/4	3/4	4-1/2	.23	1.23	1.00	NL44	TC-190	STC5
MTVOL-124	95901256	T_MA/C 43	3/4	3/4	4-1/2	.23	1.23	1.00	NL44	TC-190	STC5
MTVOR-164	96001656	T_MA/C 43	1	1	6	.23	1.23	1.25	NL44	TC-190	STC5
MTVOL-164	95901656	T_MA/C 43	1	1	6	.23	1.23	1.25	NL44	TC-190	STC5
MTVOR-204	96002056	T_MA/C 43	1-1/4	1-1/4	7	.23	1.23	1.50	NL44	TC-190	STC5
MTVOR-165	96001664	T_MA/C 54	1	1	6	.29	1.43	1.25	NL56	TC-250	STC11
MTVOL-165	95901664	T_MA/C 54	1	1	6	.29	1.43	1.25	NL56	TC-250	STC11
MTVOR-205	96002064	T_MA/C 54	1-1/4	1-1/4	7	.29	1.43	1.50	NL56	TC-250	STC11
MTVOR-2055	96002066	T_MA/C 55	1-1/4	1-1/4	7	.37	1.43	1.50	NL56	TC-250	STC11
MTVOR-2064	96002072	T_MA/C 64	1-1/4	1-1/4	7	.37	1.62	1.50	NL66	TC-310	STC4
MTVOR-206	96002076	T_MA/C 66	1-1/4	1-1/4	7	.37	1.62	1.50	NL66L	TC-310	STC4
MTVOL-206	95902076	T_MA/C 66	1-1/4	1-1/4	7	.37	1.62	1.50	NL66L	TC-310	STC4
MTVOR-246	96002476	T_MA/C 66	1-1/2	1-1/2	7	.37	1.62	2.00	NL66L	TC-310	STC4
MTVOR-2067	96002078	T_MA/C 67	1-1/4	1-1/4	7	.37	1.62	1.50	NL56L	TC-310	STC8

METRIC

PARTS

Description	EDP Code	Insert	A	B	C	D	E	F	Lock	Clamp	Clamp
									Pin	Clamp	Screw
MTVOR-2525M3	960025M3	T_MA/C 32	25,0	25,0	150,0	3,8	27,4	31,7	NL33	TC-190	STC9
MTVOL-2525M3	959025M48	T_MA/C 32	25,0	25,0	150,0	3,8	27,4	31,7	NL33	TC-190	STC9
MTVOR-2525M4	960025M56	T_MA/C 43	25,0	25,0	150,0	5,8	31,2	31,7	NL44	TC-190	STC5
MTVOL-2525M4	959025M56	T_MA/C 43	25,0	25,0	150,0	5,8	31,2	31,7	NL44	TC-190	STC5
MTVOR-3232M4	960032M56	T_MA/C 43	32,0	32,0	177,8	5,8	31,2	38,1	NL44	TC-190	STC5
MTVOR-2525M5	960025M64	T_MA/C 54	25,0	25,0	150,0	7,3	35,8	31,7	NL56	TC-250	STC11
MTVOL-2525M5	959025M64	T_MA/C 54	25,0	25,0	150,0	7,3	35,8	31,7	NL56	TC-250	STC11
MTVOR-3232M5	960032M64	T_MA/C 54	32,0	32,0	177,8	7,3	35,8	38,1	NL56	TC-250	STC11
MTVOR-2525M55	960025M66	T_MA/C 55	25,0	25,0	177,8	7,9	35,8	38,1	NL56	TC-250	STC11
MTVOR-3232M6	960032M76	T_MA/C 66	32,0	32,0	177,8	9,6	41,1	38,1	NL66L	TC-310	STC8
MTVOL-3232M6	960032M76	T_MA/C 66	32,0	32,0	177,8	9,6	41,1	38,1	NL66L	TC-310	STC4


EXTERNAL HOLDER

STVOR/L

Threading/Grooving

Inch

Most holders available with coolant port
(ie: Add CP to end of description)



PARTS

Description	EDP Code	Insert	A	B	C	D	E	F	Screw	Clamp	Clamp
									Screw	Clamp	Screw
STVOR-123	98001248	T_MC 32	3/4	3/4	4-1/2	.15	1.08	1.00	SD-1	TC-190	STC9
STVOL-123	97801248	T_MC 32	3/4	3/4	4-1/2	.15	1.08	1.00	SD-1	TC-190	STC5
STVOR-163	98001648	T_MC 32	1	1	6	.15	1.08	1.25	SD-1	TC-190	STC5
STVOL-163	97801648	T_MC 32	1	1	6	.15	1.08	1.25	SD-1	TC-190	STC5
STVOR-124	98001256	T_MC 43	3/4	3/4	4-1/2	.23	1.23	1.00	SD-2	TC-190	STC9
STVOR-164	98001656	T_MC 43	1	1	6	.23	1.23	1.25	SD-2	TC-190	STC9
STVOL-164	97801656	T_MC 43	1	1	6	.23	1.23	1.25	SD-2	TC-190	STC9
STVOR-204	98002056	T_MC 43	1-1/4	1-1/4	7	.23	1.23	1.50	SD-2	TC-190	STC9
STVOR-165	98001664	T_MC 54	1	1	6	.29	1.43	1.25	SD-3	TC-250	STC11
STVOL-165	97801664	T_MC 54	1	1	6	.29	1.43	1.25	SD-3	TC-250	STC11
STVOR-205	98002064	T_MC 54	1-1/4	1-1/4	7	.29	1.43	1.50	SD-3	TC-250	STC11
STVOR-2055	98002066	T_MC 55	1-1/4	1-1/4	7	.37	1.43	1.50	SD-3	TC-250	STC11
STVOR-206	98002076	T_MC 66	1-1/4	1-1/4	7	.37	1.62	1.50	SD-4	TC-310	STC8
STVOR-246	98002476	T_MC 66	1-1/2	1-1/2	7	.37	1.62	2.00	SD-4	TC-310	STC8




EXTERNAL HOLDER

STVOR/L

Threading/Grooving

METRIC

Most holders available with coolant port
(ie: Add CP to end of description)

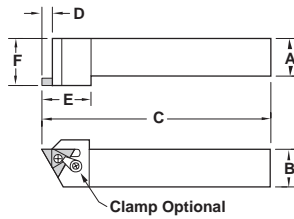


PARTS

Description	EDP Code	Insert	A	B	C	D	E	F	PARTS		
									Screw	Clamp	Clamp Screw
STVOR-2525M4	980125M56	T_MC 43	25,0	25,0	152,4	5,8	31,2	31,7	SD-2	TC-190	STC9
STVOL-2525M4	978025M56	T_MC 43	25,0	25,0	152,4	5,8	31,2	31,7	SD-2	TC-190	STC9
STVOR-3232M4	980132M56	T_MC 43	32,0	32,0	177,8	5,8	31,2	38,1	SD-2	TC-190	STC9
STVOR-2525M5	980125M64	T_MC 54	25,0	25,0	152,4	7,4	36,3	31,7	SD-3	TC-250	STC11
STVOL-2525M5	978025M64	T_MC 54	25,0	25,0	152,4	7,4	36,3	31,7	SD-3	TC-250	STC11
STVOR-3232M5	980132M64	T_MC 54	32,0	32,0	177,8	7,4	36,3	38,1	SD-3	TC-250	STC11
STVOR-323255	980132M66	T_MC 55	32,0	32,0	177,8	9,4	36,3	38,1	SD-3	TC-250	STC11
STVOR-3232M6	980132M76	T_MC 66	32,0	32,0	177,8	9,4	41,1	38,1	SD-4	TC-310	STC8

GTB

Threading/Grooving

Most bars available with coolant port
(ie: Add CP to end of description)

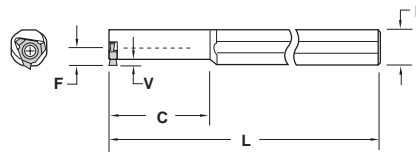


Description	EDP Code	Insert	Min. Bore	F	V	L	C	D	Torx Screw
GTB-062	93605000	TNEB 2.52	.862	.312	.070	6.00	2.00	.625	PT-324
GTB-075	93605200	TNEB 33	1.097	.375	.120	6.00	2.00	.750	PT-324

INTERNAL BAR

SI-MTHOR/L

Threading/Grooving

Most holders available with coolant port
(ie: Add CP to end of description)



PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	PARTS		
								Lock Pin	Clamp	Clamp Screw
SI-MTHOR-163	97301648	T_MA 32	1.383	1.000	14	.687	.120	NL-33	TC-190	STC-5
SI-MTHOL-163	97201648	T_MA 32	1.383	1.000	14	.687	.120	NL-33	TC-190	STC-5
SI-MTHOR-204	97302056	T_MA 43	1.815	1.250	14	.875	.190	NL-44	TC-190	STC-9
SI-MTHOL-204	97202056	T_MA 43	1.815	1.250	14	.875	.190	NL-44	TC-190	STC-9
SI-MTHOR-244	97302456	T_MA 43	1.892	1.500	14	1.000	.190	NL-44	TC-190	STC-5
SI-MTHOL-244	97202456	T_MA 43	1.892	1.500	14	1.000	.190	NL-44	TC-190	STC-5
SI-MTHOR-245	97302464	T_MA 54	2.125	1.500	14	1.073	.220	NL-56	TC-250	STC-11
SI-MTHOL-245	97202464	T_MA 54	2.125	1.500	14	1.073	.220	NL-56	TC-250	STC-11
SI-MTHOR-325	97303264	T_MA 54	2.750	2.000	16	1.323	.220	NL-56	TC-250	STC-11
SI-MTHOR-406	97304076	T_MA 66	3.250	2.500	16	1.625	.320	NL-66L	TC-380	STC-19

METRIC


PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	PARTS		
								Lock Pin	Clamp	Clamp Screw
SI-MTHOR-32M4	973032M56	T_MA 43	46,1	32,0	355,6	22,5	4,8	NL-44	TC-190	STC-9
SI-MTHOL-32M4	972032M56	T_MA 43	46,1	32,0	355,6	22,5	4,8	NL-44	TC-190	STC-9
SI-MTHOR-40M4	973040M56	T_MA 43	48,1	40,0	355,6	25,9	4,8	NL-44	TC-190	STC-5
SI-MTHOL-40M4	972040M56	T_MA 43	48,1	40,0	355,6	25,9	4,8	NL-44	TC-190	STC-5
SI-MTHOR-50M4	973050M56	T_MA 43	69,9	50,0	406,4	32,9	4,8	NL-44	TC-190	STC-5
SI-MTHOR-60M4	973060M56	T_MA 43	82,6	60,0	406,4	36,8	4,8	NL-44	TC-190	STC-5
SI-MTHOR-63M4	973063M56	T_MA 43	89,0	63,0	406,4	40,0	4,8	NL-44	TC-190	STC-5
SI-MTHOR-40M5	973040M64	T_MA 54	48,1	40,0	355,6	25,9	5,6	NL-56	TC-250	STC-11
SI-MTHOL-40M5	972040M64	T_MA 54	48,1	40,0	355,6	25,9	5,6	NL-56	TC-250	STC-11
SI-MTHOR-50M5	973050M64	T_MA 54	69,9	50,0	406,4	32,9	5,6	NL-56	TC-250	STC-11
SI-MTHOR-60M5	973060M64	T_MA 54	82,6	60,0	406,4	36,8	5,6	NL-56	TC-250	STC-11
SI-MTHOR-63M5	973063M64	T_MA 54	89,0	63,0	406,4	40,0	5,6	NL-56	TC-250	STC-11
SI-MTHOR-50M6	973050M76	T_MA 66	69,9	50,0	406,4	32,9	8,1	NL-66L	TC-380	STC-19
SI-MTHOR-63M6	973063M76	T_MA 66	89,0	63,0	406,4	40,0	8,1	NL-66L	TC-380	STC-19



SI-STHOR/L

Threading/Grooving

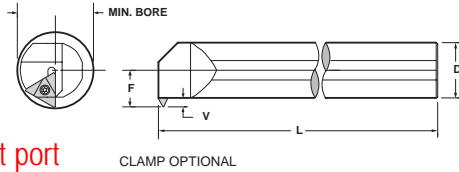

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	Screw	Clamp	Clamp Screw
SI-STHOR-163	97601648	T_MC 32	1.383	1.000	14	.687	.120	SD-1	TC-190	STC-9
SI-STHOR-163	97501648	T_MC 32	1.383	1.000	14	.687	.120	SD-1	TC-190	STC-9
SI-STHOR-204	97602056	T_MC 43	1.815	1.250	14	.875	.190	SD-2	TC-190	STC-9
SI-STHOR-204	97502056	T_MC 43	1.815	1.250	14	.875	.190	SD-2	TC-190	STC-9
SI-STHOR-244	97602456	T_MC 43	1.892	1.500	14	1.000	.190	SD-2	TC-190	STC-9
SI-STHOR-244	97502456	T_MC 43	1.892	1.500	14	1.000	.190	SD-2	TC-190	STC-9
SI-STHOR-245	97602464	T_MC 54	2.240	1.500	14	1.073	.220	SD-3	TC-250	STC-11
SI-STHOR-245	97502464	T_MC 54	2.240	1.500	16	1.323	.220	SD-3	TC-250	STC-11
SI-STHOR-325	97603264	T_MC 54	2.750	2.000	16	1.323	.220	SD-3	TC-250	STC-11
SI-STHOR-406	97604076	T_MC 66	3.250	2.500	16	1.625	.320	SD-4	TC-380	STC-19

METRIC


PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	Screw	Clamp	Clamp Screw
SI-STHOR-25M3	976025M48	T_MC 32	35,1	25,0	355,6	17,4	3,1	SD-1	TC-190	STC-9
SI-STHOR-25M3	975025M48	T_MC 32	35,1	25,0	355,6	17,4	3,1	SD-1	TC-190	STC-9
SI-STHOR-32M4	976032M56	T_MC 43	46,1	32,0	355,6	22,5	4,8	SD-2	TC-190	STC-9
SI-STHOR-32M4	975032M56	T_MC 43	46,1	32,0	355,6	22,5	4,8	SD-2	TC-190	STC-9
SI-STHOR-40M4	976040M56	T_MC 43	48,1	40,0	355,6	25,9	4,8	SD-2	TC-190	STC-9
SI-STHOR-40M4	975040M56	T_MC 43	48,1	40,0	355,6	25,9	4,8	SD-2	TC-190	STC-9
SI-STHOR-40M5	976040M64	T_MC 54	48,1	40,0	355,6	26,8	5,6	SD-3	TC-250	STC-11
SI-STHOR-40M5	975040M64	T_MC 54	56,9	40,0	406,4	33,6	5,6	SD-3	TC-250	STC-11
SI-STHOR-50M5	976050M64	T_MC 54	69,9	50,0	406,4	33,6	5,6	SD-3	TC-250	STC-11
SI-STHOR-60M6	976060M76	T_MC 66	82,6	60,0	406,4	40,6	8,1	SD-4	TC-380	STC-19

INTERCHANGEABLE HEADS

H-MTHOR/L*

Most holders available with coolant port
(ie: Add CP to end of description)

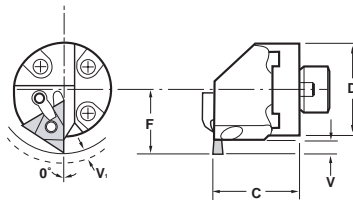



PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw	Lock Pin
H16-MTHOR-3	9IH7301648	T_MA/C 32	1.000	1.625	0.688	1.690	TC-190	STC-5	NL-33
H20-MTHOR-3	9IH7302048	T_MA/C 32	1.250	1.625	0.798	1.788	TC-190	STC-5	NL-33
H24-MTHOR-3	9IH7302448	T_MA/C 32	1.500	1.625	0.923	1.875	TC-190	STC-5	NL-33
H20-MTHOR-4	9IH7302056	T_MA/C 43	1.250	1.625	1.048	2.420	TC-190	STC-5	NL-44
H24-MTHOR-4	9IH7302456	T_MA/C 43	1.500	1.625	1.173	2.625	TC-190	STC-5	NL-44
H28-MTHOR-4	9IH7302856	T_MA/C 43	1.750	1.625	1.298	2.875	TC-190	STC-5	NL-44
H32-MTHOR-4	9IH7303256	T_MA/C 43	2.000	1.625	1.423	2.875	TC-190	STC-5	NL-44
H40-MTHOR-4	9IH7304056	T_MA/C 43	2.500	1.625	1.673	3.375	TC-190	STC-5	NL-44
H24-MTHOR-5	9IH7302464	T_MA/C 54	1.500	1.625	1.173	3.200	TC-250	STC-11	NL-56
H28-MTHOR-5	9IH7302864	T_MA/C 54	1.750	1.625	1.298	3.250	TC-250	STC-11	NL-56
H32-MTHOR-5	9IH7303264	T_MA/C 54	2.000	1.625	1.423	3.250	TC-250	STC-11	NL-56
H40-MTHOR-5	9IH7304064	T_MA/C 54	2.500	1.625	1.673	3.375	TC-250	STC-11	NL-56

*Left hand quoted on request.

HS-MTHOR/L*

Most holders available with coolant port
(ie: Add CP to end of description)

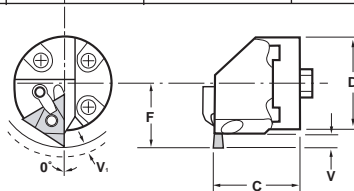

RH SHOWN




PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Clamp	Clamp Screw	Lock Pin
HS25-MTHOR-3	9IHS73025M48	TNMA/C 32	0.98	0.98	0.678	1.690	TC-190	STC-5	NL-33
HS32-MTHOR-3	9IHS73032M48	TNMA/C 32	1.26	1.26	0.800	1.788	TC-190	STC-5	NL-33
HS40-MTHOR-3	9IHS73040M48	TNMA/C 32	1.57	1.26	0.933	1.875	TC-190	STC-5	NL-33
HS32-MTHOR-4	9IHS73032M56	TNMA/C 43	1.26	1.26	1.050	2.420	TC-190	STC-5	NL-44
HS40-MTHOR-4	9IHS73040M56	TNMA/C 43	1.57	1.26	1.203	2.625	TC-190	STC-5	NL-44
HS50-MTHOR-4	9IHS73050M56	TNMA/C 43	1.97	1.57	1.413	2.875	TC-190	STC-5	NL-44
HS60-MTHOR-4	9IHS73060M56	TNMA/C 43	2.36	1.57	1.603	3.375	TC-190	STC-5	NL-44
HS40-MTHOR-5	9IHS73040M64	TNMA/C 54	1.57	1.26	1.203	3.200	TC-250	STC-11	NL-56
HS50-MTHOR-5	9IHS73050M64	TNMA/C 54	1.97	1.57	1.413	3.250	TC-250	STC-11	NL-56
HS60-MTHOR-5	9IHS73060M64	TNMA/C 54	2.36	1.57	1.603	3.375	TC-250	STC-11	NL-56

*Left hand quoted on request.



TOOL-FLO

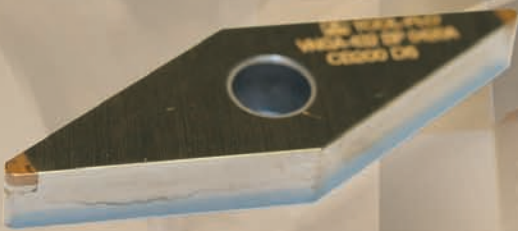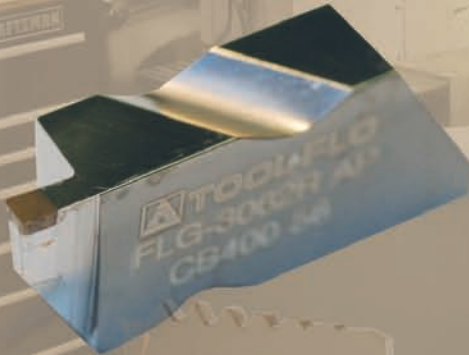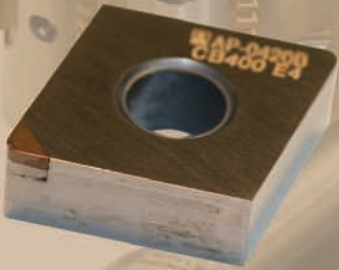

TOOL-FLO
GR-8R-71
TF14828 AT50

TOOL-FLO
GR-8R-71
TF14828 AT50

TOOL-FLO
GR-8R-71
TF14828 AT50




TOOL-FLO
GR-8R-71
TF14828 AT50



PCBN



PCBN - Polycrystalline Cubic Boron Nitride Insert Nomenclature Chart

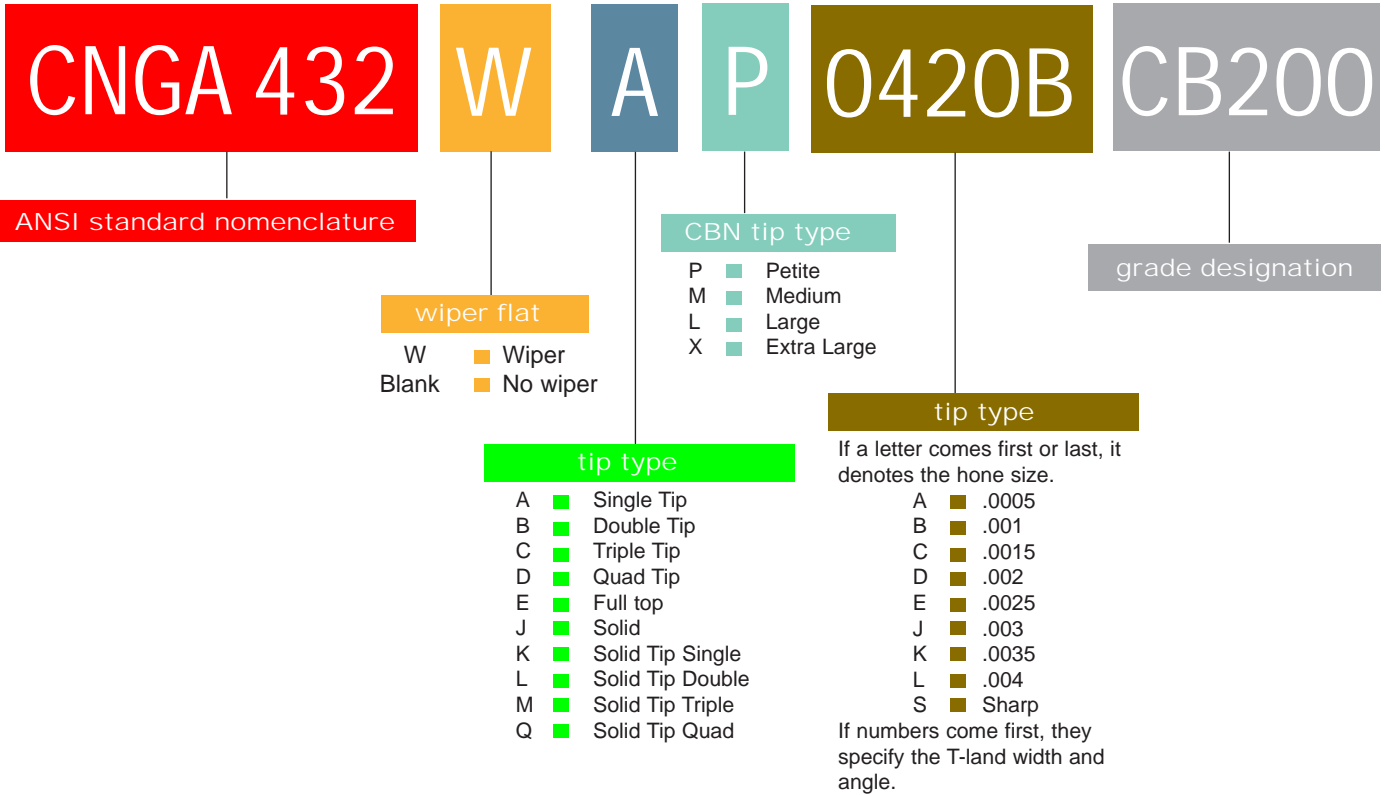

PCBN


PCBN Grade Descriptions

Grades	Descriptions
CB200	A high CBN content, PCBN tip brazed onto a carbide insert. Superior impact resistance. Ideally suited for machining cast iron and powder metal alloys, fully pearlitic gray cast iron, chilled irons; excellent results in high temperature alloys such as Inconel with an up sharp edge. Apply to tool steels and hard steels 45 HRC and higher; high chrome alloy steels. Application ranges from continuous to highly interrupted cuts.
CB400	A low CBN content, PCBN tip brazed onto a carbide insert. Ideally suited for roughing to finishing of hardened steels 45 HRC and higher. Use on bearing steel, hot and cold work steels, die steels, case hardened steels, carburized and nitrided irons.
CB410	PCBN tip brazed onto a carbide insert. Ideally suited for roughing to finishing of hardened steels 45 HRC and higher. Use on bearing steel, hot and cold work steels, die steels, case hardened steels, carburized and nitrided irons.



SINGLE TIP PCBN

CNGA

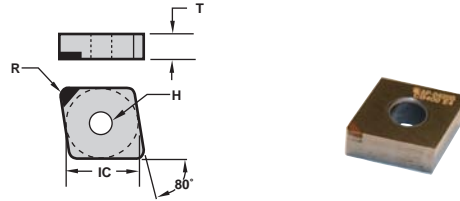


For Holders see pg. 187-206.

Description	EDP Code	IC	R	T	H	Edge Prep	CB200	CB400
CNGA-431 APS	CBGAM1APS	.500	.015	.187	.203	Sharp	●	●
CNGA-432 APS	CBGAM2APS	.500	.031	.187	.203	Sharp	●	●
CNGA-433 APS	CBGAM3APS	.500	.047	.187	.203	Sharp	●	●
CNGA-431 AP 0420A	CBGAM1AP0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
CNGA-432 AP 0420A	CBGAM2AP0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
CNGA-433 AP 0420A	CBGAM3AP0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●
CNGA-431 AL 0420A	CBGAM1AL0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
CNGA-432 AL 0420A	CBGAM2AL0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
CNGA-433 AL 0420A	CBGAM3AL0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●

DOUBLE TIP PCBN

CNGA

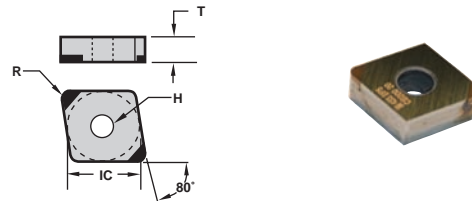


For Holders see pg. 187-206.

Description	EDP Code	IC	R	T	H	Wiper	Edge Prep	CB200	CB400
CNGA-431 BPS	CBGAM1BPS	.500	.015	.187	.203		Sharp	●	●
CNGA-432 BPS	CBGAM2BPS	.500	.031	.187	.203		Sharp	●	●
CNGA-433 BPS	CBGAM3BPS	.500	.047	.187	.203		Sharp	●	●
CNGA-431 BP 0420A	CBGAM1BP0420A	.500	.015	.187	.203		T-Land W=.004, Angle 20°	●	●
CNGA-432 BP 0420A	CBGAM2BP0420A	.500	.031	.187	.203		T-Land W=.004, Angle 20°	●	●
CNGA-433 BP 0420A	CBGAM3BP0420A	.500	.047	.187	.203		T-Land W=.004, Angle 20°	●	●
CNGA-431 WBP 0420A	CBGAM1WBP0420A	.500	.015	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
CNGA-432 WBP 0420A	CBGAM2WBP0420A	.500	.031	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
CNGA-433 WBP 0420A	CBGAM3WBP0420A	.500	.047	.187	.203	✓	T-Land W=.004, Angle 20°	●	●

SINGLE TIP PCBN

DNGA

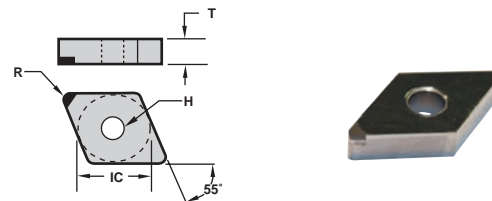

For Holders see pg. 187-206.

Description	EDP Code	IC	R	T	H	Edge Prep	CB200	CB400
DNGA-431 APS	CEGAM1APS	.500	.015	.187	.203	Sharp	●	●
DNGA-432 APS	CEGAM2APS	.500	.031	.187	.203	Sharp	●	●
DNGA-433 APS	CEGAM3APS	.500	.047	.187	.203	Sharp	●	●
DNGA-431 AP 0420A	CEGAM1AP0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
DNGA-432 AP 0420A	CEGAM2AP0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
DNGA-433 AP 0420A	CEGAM3AP0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●
DNGA-431 AL 0420A	CEGAM1AL0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
DNGA-432 AL 0420A	CEGAM2AL0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
DNGA-433 AL 0420A	CEGAM3AL0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Cast Irons	●
Hardened & Bearing Steel	●
Powdered Metals	●
Super Alloys	●



DOUBLE TIP PCBN

DNGA

For Holders see pg. 187-206.




Description	EDP Code	IC	R	T	H	Wiper	Edge Prep	CB200	CB400
DNGA-431 BPS	CEGAM1BPS	.500	.015	.187	.203		Sharp	●	●
DNGA-432 BPS	CEGAM2BPS	.500	.031	.187	.203		Sharp	●	●
DNGA-433 BPS	CEGAM3BPS	.500	.047	.187	.203		Sharp	●	●
DNGA-431 BP 0420A	CEGAM1BP0420A	.500	.015	.187	.203		T-Land W=.004, Angle 20°	●	●
DNGA-432 BP 0420A	CEGAM2BP0420A	.500	.031	.187	.203		T-Land W=.004, Angle 20°	●	●
DNGA-433 BP 0420A	CEGAM3BP0420A	.500	.047	.187	.203		T-Land W=.004, Angle 20°	●	●
DNGA-431 WBP 0420A	CEGAM1WBP0420A	.500	.015	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
DNGA-432 WBP 0420A	CEGAM2WBP0420A	.500	.031	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
DNGA-433 WBP 0420A	CEGAM3WBP0420A	.500	.047	.187	.203	✓	T-Land W=.004, Angle 20°	●	●

SINGLE TIP PCBN

SNGA

For Holders see pg. 187-206.





Description	EDP Code	IC	R	T	H	Edge Prep	CB200	CB400
SNGA-431 APS	CNGAM1APS	.500	.015	.187	.203	Sharp	●	●
SNGA-432 APS	CNGAM2APS	.500	.031	.187	.203	Sharp	●	●
SNGA-433 APS	CNGAM3APS	.500	.047	.187	.203	Sharp	●	●
SNGA-431 AP 0420A	CNGAM1AP0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
SNGA-432 AP 0420A	CNGAM2AP0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
SNGA-433 AP 0420A	CNGAM3AP0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●
SNGA-431 AL 0420A	CNGAM1AL0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
SNGA-432 AL 0420A	CNGAM2AL0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
SNGA-433 AL 0420A	CNGAM3AL0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●

DOUBLE TIP PCBN

SNGA

For Holders see pg. 187-206.



Description	EDP Code	IC	R	T	H	Wiper	Edge Prep	CB200	CB400
SNGA-431 BPS	CNGAM1BPS	.500	.015	.187	.203		Sharp	●	●
SNGA-432 BPS	CNGAM2BPS	.500	.031	.187	.203		Sharp	●	●
SNGA-433 BPS	CNGAM3BPS	.500	.047	.187	.203		Sharp	●	●
SNGA-431 BP 0420A	CNGAM1BP0420A	.500	.015	.187	.203		T-Land W=.004, Angle 20°	●	●
SNGA-432 BP 0420A	CNGAM2BP0420A	.500	.031	.187	.203		T-Land W=.004, Angle 20°	●	●
SNGA-433 BP 0420A	CNGAM3BP0420A	.500	.047	.187	.203		T-Land W=.004, Angle 20°	●	●
SNGA-431 WBP 0420A	CNGAM1WBP0420A	.500	.015	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
SNGA-432 WBP 0420A	CNGAM2WBP0420A	.500	.031	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
SNGA-433 WBP 0420A	CNGAM3WBP0420A	.500	.047	.187	.203	✓	T-Land W=.004, Angle 20°	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.


Cast Irons	●
Hardened & Bearing Steel	●
Powdered Metals	●
Super Alloys	●



SINGLE TIP PCBN

TNGA

■ For Holders see pg. 187-206.





Description	EDP Code	IC	R	T	H	Edge Prep	CB200	CB400
TNGA-331 APS	CTGAH1APS	.375	.015	.187	.150	Sharp	●	●
TNGA-332 APS	CTGAH2APS	.375	.031	.187	.150	Sharp	●	●
TNGA-333 APS	CTGAH3APS	.375	.047	.187	.150	Sharp	●	●
TNGA-331 AP 0420A	CTGAH1AP0420A	.375	.015	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-332 AP 0420A	CTGAH2AP0420A	.375	.031	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-333 AP 0420A	CTGAH3AP0420A	.375	.047	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-331 AL 0420A	CTGAH1AL0420A	.375	.015	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-332 AL 0420A	CTGAH2AL0420A	.375	.031	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-333 AL 0420A	CTGAH3AL0420A	.375	.047	.187	.150	T-Land W=.004, Angle 20°	●	●
TNGA-431 APS	CTGAJ1APS	.500	.015	.187	.203	Sharp	●	●
TNGA-432 APS	CTGAJ2APS	.500	.031	.187	.203	Sharp	●	●
TNGA-433 APS	CTGAJ3APS	.500	.047	.187	.203	Sharp	●	●
TNGA-431 AP 0420A	CTGAJ1AP0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
TNGA-432 AP 0420A	CTGAJ2AP0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
TNGA-433 AP 0420A	CTGAJ3AP0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●
TNGA-431 AL 0420A	CTGAJ1AL0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
TNGA-432 AL 0420A	CTGAJ2AL0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
TNGA-433 AL 0420A	CTGAJ3AL0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●

TRIPLE TIP PCBN

TNGA

■ For Holders see pg. 187-206.



Description	EDP Code	IC	R	T	H	Wiper	Edge Prep	CB200	CB400
TNGA-331 CPS	CTGAH1CPS	.375	.015	.187	.150		Sharp	●	●
TNGA-332 CPS	CTGAH2CPS	.375	.031	.187	.150		Sharp	●	●
TNGA-333 CPS	CTGAH3CPS	.375	.047	.187	.150		Sharp	●	●
TNGA-331 CP 0420A	CTGAH1CP0420A	.375	.015	.187	.150		T-Land W=.004, Angle 20°	●	●
TNGA-332 CP 0420A	CTGAH2CP0420A	.375	.031	.187	.150		T-Land W=.004, Angle 20°	●	●
TNGA-333 CP 0420A	CTGAH3CP0420A	.375	.047	.187	.150		T-Land W=.004, Angle 20°	●	●
TNGA-331 WCP 0420A	CTGAH1WCP0420A	.375	.015	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
TNGA-332 WCP 0420A	CTGAH2WCP0420A	.375	.031	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
TNGA-333 WCP 0420A	CTGAH3WCP0420A	.375	.047	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
TNGA-431 CPS	CTGAJ1CPS	.500	.015	.187	.203		Sharp	●	●
TNGA-432 CPS	CTGAJ2CPS	.500	.031	.187	.203		Sharp	●	●
TNGA-433 CPS	CTGAJ3CPS	.500	.047	.187	.203		Sharp	●	●
TNGA-431 CP 0420A	CTGAJ1CP0420A	.500	.015	.187	.203		T-Land W=.004, Angle 20°	●	●
TNGA-432 CP 0420A	CTGAJ2CP0420A	.500	.031	.187	.203		T-Land W=.004, Angle 20°	●	●
TNGA-433 CP 0420A	CTGAJ3CP0420A	.500	.047	.187	.203		T-Land W=.004, Angle 20°	●	●
TNGA-431 WCP 0420A	CTGAJ1WCP0420A	.500	.015	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
TNGA-432 WCP 0420A	CTGAJ2WCP0420A	.500	.031	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
TNGA-433 WCP 0420A	CTGAJ3WCP0420A	.500	.047	.187	.203	✓	T-Land W=.004, Angle 20°	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Cast Irons	●
Hardened & Bearing Steel	●
Powdered Metals	●
Super Alloys	●



SINGLE TIP PCBN

VNGA

For Holders see pg. 187-206.


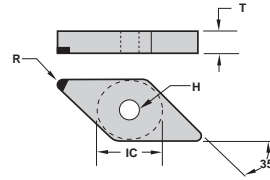


Description	EDP Code	IC	R	T	H	Edge Prep	CB200	CB400
							●	●
VNGA-331 APS	CXGAH1APS	.375	.015	.187	.150	Sharp	●	●
VNGA-332 APS	CXGAH2APS	.375	.031	.187	.150	Sharp	●	●
VNGA-333 APS	CXGAH3APS	.375	.047	.187	.150	Sharp	●	●
VNGA-331 AP 0420A	CXGAH1AP0420A	.375	.015	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-332 AP 0420A	CXGAH2AP0420A	.375	.031	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-333 AP 0420A	CXGAH3AP0420A	.375	.047	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-331 AL 0420A	CXGAH1AL0420A	.375	.015	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-332 AL 0420A	CXGAH2AL0420A	.375	.031	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-333 AL 0420A	CXGAH3AL0420A	.375	.047	.187	.150	T-Land W=.004, Angle 20°	●	●
VNGA-431 APS	CXGAJ1APS	.500	.015	.187	.203	Sharp	●	●
VNGA-432 APS	CXGAJ2APS	.500	.031	.187	.203	Sharp	●	●
VNGA-433 APS	CXGAJ3APS	.500	.047	.187	.203	Sharp	●	●
VNGA-431 AP 0420A	CXGAJ1AP0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
VNGA-432 AP 0420A	CXGAJ2AP0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
VNGA-433 AP 0420A	CXGAJ3AP0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●
VNGA-431 AL 0420A	CXGAJ1AL0420A	.500	.015	.187	.203	T-Land W=.004, Angle 20°	●	●
VNGA-432 AL 0420A	CXGAJ2AL0420A	.500	.031	.187	.203	T-Land W=.004, Angle 20°	●	●
VNGA-433 AL 0420A	CXGAJ3AL0420A	.500	.047	.187	.203	T-Land W=.004, Angle 20°	●	●

DOUBLE TIP PCBN

VNGA

For Holders see pg. 187-206.

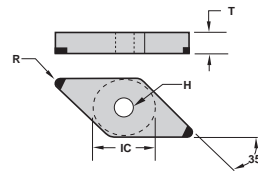

Description	EDP Code	IC	R	T	H	Wiper	Edge Prep	CB200	CB400
								●	●
VNGA-331 BPS	CXGAH1BPS	.375	.015	.187	.150		Sharp	●	●
VNGA-332 BPS	CXGAH2BPS	.375	.031	.187	.150		Sharp	●	●
VNGA-331 BP 0420A	CXGAH1BP0420A	.375	.015	.187	.150		T-Land W=.004, Angle 20°	●	●
VNGA-332 BP 0420A	CXGAH2BP0420A	.375	.031	.187	.150		T-Land W=.004, Angle 20°	●	●
VNGA-333 BP 0420A	CXGAH3BP0420A	.375	.047	.187	.150		T-Land W=.004, Angle 20°	●	●
VNGA-331 WBP 0420A	CXGAH1WBP0420A	.375	.015	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
VNGA-332 WBP 0420A	CXGAH2WBP0420A	.375	.031	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
VNGA-333 WBP 0420A	CXGAH3WBP0420A	.375	.047	.187	.150	✓	T-Land W=.004, Angle 20°	●	●
VNGA-431 BPS	CXGAJ1BPS	.500	.015	.187	.203		Sharp	●	●
VNGA-432 BPS	CXGAJ2BPS	.500	.031	.187	.203		Sharp	●	●
VNGA-433 BPS	CXGAJ3BPS	.500	.047	.187	.203		Sharp	●	●
VNGA-431 BP 0420A	CXGAJ1BP0420A	.500	.015	.187	.203		T-Land W=.004, Angle 20°	●	●
VNGA-432 BP 0420A	CXGAJ2BP0420A	.500	.031	.187	.203		T-Land W=.004, Angle 20°	●	●
VNGA-433 BP 0420A	CXGAJ3BP0420A	.500	.047	.187	.203		T-Land W=.004, Angle 20°	●	●
VNGA-431 WBP 0420A	CXGAJ1WBP0420A	.500	.015	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
VNGA-432 WBP 0420A	CXGAJ2WBP0420A	.500	.031	.187	.203	✓	T-Land W=.004, Angle 20°	●	●
VNGA-433 WBP 0420A	CXGAJ3WBP0420A	.500	.047	.187	.203	✓	T-Land W=.004, Angle 20°	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Cast Irons	●
Hardened & Bearing Steel	●
Powdered Metals	●
Super Alloys	●



SINGLE TIP PCBN GROOVING

FLG

For Holders see pg. 107-109.





Description	EDP Code	W	R	T	H	E	Edge Prep	CB200	CB400
								●	●
FLG-3047L APB	CB563647LAPB	.047	.005/.010	.195	.219	.075	.001 Hone	●	●
FLG-3047R APB	CB563647RAPB	.047	.005/.010	.195	.219	.075	.001 Hone	●	●
FLG-3062L APB	CB563662LAPB	.062	.005/.010	.195	.219	.120	.001 Hone	●	●
FLG-3062R APB	CB563662RAPB	.062	.005/.010	.195	.219	.120	.001 Hone	●	●
FLG-3094L AMB	CB563694LAMB	.094	.005/.010	.195	.219	.180	.001 Hone	●	●
FLG-3094R AMB	CB563694RAMB	.094	.005/.010	.195	.219	.180	.001 Hone	●	●
FLG-3125L AMB	CB563825LAMB	.125	.005/.010	.195	.219	.180	.001 Hone	●	●
FLG-3125R AMB	CB563825RAMB	.125	.005/.010	.195	.219	.180	.001 Hone	●	●
FLG-3189L ALB	CB563889LALB	.189	.020/.025	.195	.219	.180	.001 Hone	●	●
FLG-3189R ALB	CB563889RALB	.189	.020/.025	.195	.219	.180	.001 Hone	●	●
FLG-4250L ALB	CB574050LALB	.250	.020/.025	.255	.453	.250	.001 Hone	●	●
FLG-4250R ALB	CB574050RALB	.250	.020/.025	.255	.453	.250	.001 Hone	●	●

SINGLE TIP PCBN GROOVING

FLR

Full Nose Radius

For Holders see pg.107-109.




Description	EDP Code	W	R	T	H	E	Edge Prep	CB200	CB400
								●	●
FLR-3031L APB	CB593031LAPB	.062	.031	.195	.219	.125	.001 Hone	●	●
FLR-3031R APB	CB593031RAPB	.062	.031	.195	.219	.125	.001 Hone	●	●
FLR-3062L APB	CB593062LAPB	.125	.062	.195	.219	.180	.001 Hone	●	●
FLR-3062R APB	CB593062RAPB	.125	.062	.195	.219	.180	.001 Hone	●	●

SINGLE TIP PCBN GROOVING

VDB

For Holders see pg. 215-218



Description	EDP Code	W	R	L	H	S	Edge Prep	CB200	CB400
								●	●
VDB 125 A015 AMB	CB79125AMB	.125	.015	1.125	.250	.106	.001 Hone	●	●
VDB 188 A015 ALB	CB79188ALB	.188	.015	1.125	.250	.144	.001 Hone	●	●
VDB 250 A015 ALB	CB79250ALB	.250	.015	1.125	.250	.144	.001 Hone	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Irons	●
Hardened & Bearing Steel	●
Powdered Metals	●
Super Alloys	●



Recommended Feed rate - inch/rev (mm/rev)

workpiece material	hardened steels	grey cast irons	white alloy cast iron	super alloys	powder metal	bearing steels
CB200 <i>high content CBN for finishing</i>		.010 - .020 (0,25 - 0,51)	.010 - .030 (0,25 - 0,76)	.003 - .008 (0,08 - 0,20)	.003 - .008 (0,08 - 0,20)	
CB400 <i>low content CBN for roughing</i>	.004 - .008 (0,10 - 0,20)					.002 - .008 (0,05 - 0,20)

Recommended Grade and Speed - sfpm (mm/min)

workpiece material	hardened steels	grey cast irons	white alloy cast iron	super alloys		bearing steels
CB200 <i>high content CBN for finishing</i>		< 240 HBN 1500 - 3500(457 - 1067) > 240 HBN 1000 - 2000(305 - 610)	300 - 600 (91 - 200)	500 - 1000 (152 - 305)	300 - 1000 (91 - 305)	
CB400 <i>low content CBN for roughing</i>	400 - 500 (122 - 152)					375 - 500 (114 - 152)


Recommended Edge Preparation

The following are suggestions for standard edge preparations.


Turning	CB200	.008 x 20° and/or .001 hone
Grooving (Flo-Lock and Vee-Bottom)	CB400	.004 x 20° and/or .001 hone

Due to unique applications, special edge preparations may be required.

T-Land and hones protect the cutting edge by eliminating a sharp cutting edge which reduces edge chipping and breakage. Up-sharp edges are prone to chipping or breakage.

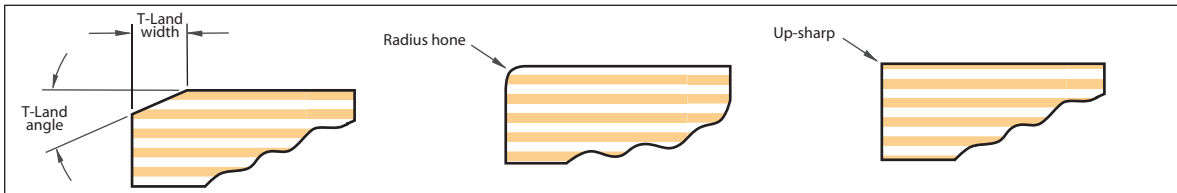

T-Land and hones strengthen the cutting edges by redirecting the cutting forces back into the insert.

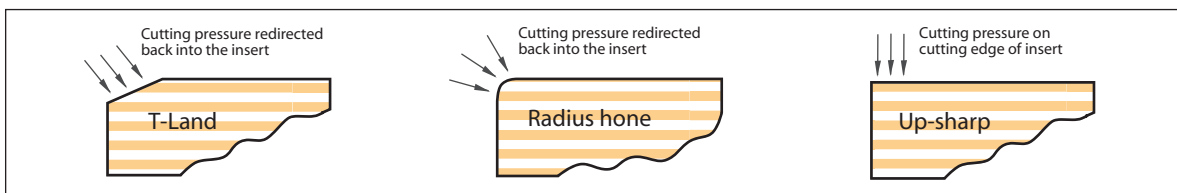



TOOL-FLO



TOOL-FLO
CR-5B75-4E
TF22675 G50

TOOL-FLO
FLVLCR-163D
MADE IN THE USA


PROFILING

PROFILING



BORING SMALL DIAMETER


CPGM



Description	EDP Code	IC	R	T	B	H	TIN Coated		AITIN Coated	
							GP25	GP50	AC25	AC50
CPGM-21.50	SA20	.250	.004	.094	.0672	.110	●	●	●	●
CPGM-21.505	SA205	.250	.008	.094	.0650	.110	●	●	●	●
CPGM-21.51	SA21	.250	.015	.094	.0607	.110	●	●	●	●
CPGM-21.52	SA22	.250	.031	.094	.0521	.110	●	●	●	●
CPGM-32.50	SA30	.375	.004	.156	.1020	.173	●	●	●	●
CPGM-32.505	SA305	.375	.008	.156	.0998	.173	●	●	●	●
CPGM-32.51	SA31	.375	.015	.156	.0855	.173	●	●	●	●
CPGM-32.52	SA32	.375	.031	.156	.0868	.173	●	●	●	●

55° DIAMOND PROFILING


DPGR



Description	EDP Code	D	T	R	TIN Coated		AITIN Coated	
					GP25	GP50	AC25	AC50
DPGR-432	643432	.500	.187	.031	●	●	●	●

55° PARALLELOGRAM PROFILING


FLPGL/R

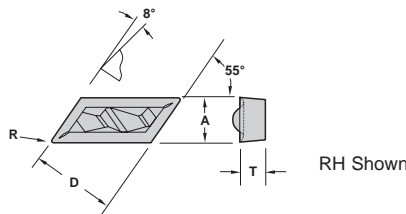

Description	EDP Code	D	T	A	R	TIN Coated		AITIN Coated	
						GP25	GP50	AC25	AC50
FLPGL-51	641G51	.375	.125	.250	.015	●	●	●	●
FLPGR-51	642G51	.375	.125	.250	.015	●	●	●	●
FLPGL-52	641G52	.375	.125	.250	.031	●	●	●	●
FLPGR-52	642G52	.375	.125	.250	.031	●	●	●	●

PROFILING

FLPL/R

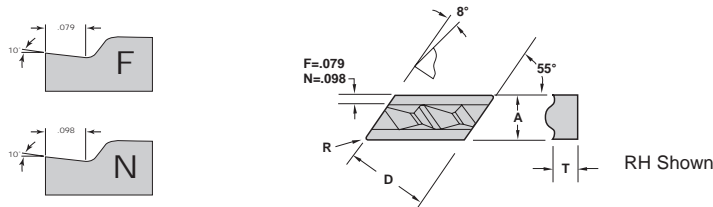

Description	EDP Code	R	T	D	A	TIN Coated		AITIN Coated	
						GP25	GP50	AC25	AC50
FLPR-50.5	642505	.005	.125	.375	.250	●	●	●	●
FLPL-50.5	641505	.005	.125	.375	.250	●	●	●	●
FLPR-51	64251	.015	.125	.375	.250	●	●	●	●
FLPL-51	64151	.015	.125	.375	.250	●	●	●	●
FLPR-52	64252	.031	.125	.375	.250	●	●	●	●
FLPL-52	64152	.031	.125	.375	.250	●	●	●	●
FLPR-130.5	6421305	.005	.187	.500	.375	●	●	●	●
FLPL-130.5	6411305	.005	.187	.500	.375	●	●	●	●
FLPR-131F	642131F	.015	.187	.500	.375	●	●	●	●
FLPL-131F	641131F	.015	.187	.500	.375	●	●	●	●
FLPR-132F	642132F	.031	.187	.500	.375	●	●	●	●
FLPL-132F	641132F	.031	.187	.500	.375	●	●	●	●
FLPR-132N	642132N	.031	.187	.500	.375	●	●	●	●
FLPL-132N	641132N	.031	.187	.500	.375	●	●	●	●
FLPR-331N	642331N	.015	.187	.734	.375	●	●	●	●
FLPL-331N	641331N	.015	.187	.734	.375	●	●	●	●
FLPR-332F	642332F	.031	.187	.734	.375	●	●	●	●
FLPL-332F	641332F	.031	.187	.734	.375	●	●	●	●
FLPR-332N	642332N	.031	.187	.734	.375	●	●	●	●
FLPL-332N	641332N	.031	.187	.734	.375	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Material	GP25	GP50	AC25	AC50
Cast Iron	▲	●	●	●
Non-Ferrous	●	●	●	●
Stainless/High Temp	▲	●	●	●
Steel	●	▲	●	●



PROFILING

35° DIAMOND PROFILING

VPGR




Description	EDP Code	IC	T	R	TIN Coated		AlTiN Coated	
					GP25	GP50	AC25	AC50
VPGR-330.5	6443305	.375	.187	.008	●	●	●	●
VPGR-331	644331	.375	.187	.015	●	●	●	●
VPGR-332	644332	.375	.187	.031	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.	<ul style="list-style-type: none"> ● High performance choice in optimal conditions. ▲ Recommended grade under general conditions. 	<table border="1"> <tr><td>Cast Iron</td><td>▲</td><td>●</td></tr> <tr><td>Non-Ferrous</td><td>▲</td><td>●</td></tr> <tr><td>Stainless/High Temp</td><td>▲</td><td>●</td></tr> <tr><td>Steel</td><td>▲</td><td>●</td></tr> </table>	Cast Iron	▲	●	Non-Ferrous	▲	●	Stainless/High Temp	▲	●	Steel	▲	●
Cast Iron	▲	●												
Non-Ferrous	▲	●												
Stainless/High Temp	▲	●												
Steel	▲	●												

EXTERNAL HOLDERS

FLDLPR/L
Profiling




RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Seat		Clamp	
								Seat	Screw	Clamp	Screw
FLDLPR-164D	92831625	DPGR-432	1	1	6	1.38	1.250	SM-414	S-111	CM116	S-532
FLDLPL-164D	92821625	DPGR-432	1	1	6	1.38	1.250	SM-414	S-111	CM117	S-532
FLDLPR-204D	92832025	DPGR-432	1-1/4	1-1/4	6	1.38	1.500	SM-414	S-111	CM116	S-532
FLDLPL-204D	92822025	DPGR-432	1-1/4	1-1/4	6	1.38	1.500	SM-414	S-111	CM117	S-532

FLVLCR/L
Profiling



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Seat		Clamp	
								Seat	Screw	Clamp	Screw
FLVLCR-123B	93531226	VPGR-33_	3/4	3/4	4-1/2	1.44	1.000	SM-412	S-959	CM113	S-412
FLVLCL-123B	93521226	VPGR-33_	3/4	3/4	4-1/2	1.44	1.000	SM-412	S-959	CM114	S-412
FLVLCR-163D	93531626	VPGR-33_	1	1	6	1.44	1.250	SM-412	S-959	CM113	S-412
FLVLCL-163D	93521626	VPGR-33_	1	1	6	1.44	1.250	SM-412	S-959	CM114	S-412
FLVLCR-203D	93532026	VPGR-33_	1-1/4	1-1/4	6	1.44	1.500	SM-412	S-959	CM113	S-412
FLVLCL-203D	93522026	VPGR-33_	1-1/4	1-1/4	6	1.44	1.500	SM-412	S-959	CM114	S-412

PROFILING



EXTERNAL HOLDERS

FLVVCN Profiling


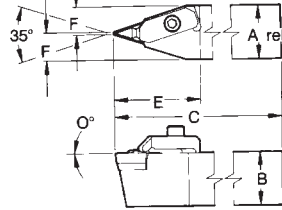


Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	PARTS			
								Seat	Seat Screw	Clamp	Clamp Screw
FLVVCN-163D	93541626	VPGR-33	1	1	6	1.62	0.522	SM-412	S-959	CM113	S-412
FLVVCN-203D	93542026	VPGR-33	1-1/4	1-1/4	6	1.62	0.647	SM-412	S-959	CM113	S-412

FLDPPN Profiling

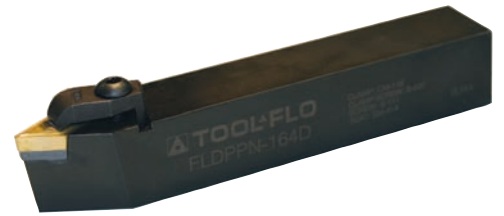


Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	PARTS			
								Seat	Seat Screw	Clamp	Clamp Screw
FLDPPN-164D	92841625	DPGR-432	1	1	6	1.59	.519	SM-414	S-111	CM116	S-532
FLDPPN-204D	92842025	DPGR-432	1-1/4	1-1/4	6	1.59	.644	SM-414	S-111	CM116	S-532

PROFILING

FLKL Profiling

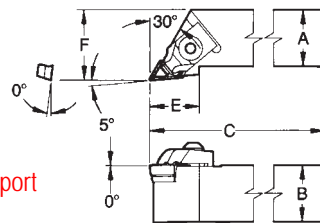

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	F	E	PARTS			
								Seat	Seat Screw	Clamp	Clamp Screw
FLKLCR-0805V	93130829	FLPR-5_*	1/2	1/2	3-1/2	.750	.875	SM-285	S-959	CM79	S-524
FLKLCL-0805V	93120829	FLPL-5_*	1/2	1/2	3-1/2	.750	.875	SM-286	S-959	CM71	S-524
FLKLCR-1205B	93131229	FLPR-5_*	3/4	3/4	4-1/2	1.000	.875	SM-285	S-959	CM68	S-524
FLKLCL-1205B	93121229	FLPL-5_*	3/4	3/4	4-1/2	1.000	.875	SM-286	S-959	CM68	S-524
FLKLNR-121B	93131230	FLPR-13_	3/4	3/4	4-1/2	1.000	1.250	SM-272	SL-344	CM66	S-625
FLKLNL-121B	93121230	FLPL-13_	3/4	3/4	4-1/2	1.000	1.250	SM-271	SL-344	CM66	S-625
FLKLNR-161C	93131630	FLPR-13_	1	1	5	.750	.875	SM-272	SL-344	CM66	S-625
FLKLNL-161C	93121630	FLPL-13_	1	1	5	.750	.875	SM-271	SL-344	CM66	S-625
FLKLNR-163D	93131631	FLPR-33_	1	1	6	1.500	.875	SM-268	SL-344	CM65	S-625
FLKLNL-163D	93121631	FLPL-33_	1	1	6	1.500	.875	SM-267	SL-344	CM65	S-625
FLKLNR-203D	93132031	FLPR-33_	1-1/4	1-1/4	6	1.500	1.438	SM-268	SL-344	CM65	S-625
FLKLNL-203D	93122031	FLPL-33_	1-1/4	1-1/4	6	1.500	1.438	SM-267	SL-344	CM65	S-625


*Also used with inserts FLPR/FLPL.



PROFILING

EXTERNAL HOLDERS

FLKL-F Profiling




Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Seat Clamp			
								Seat	Screw	Clamp	Screw
FLKLCRF-0805D	93150829	FLPR-5_*	1/2	1/2	6	.750	.500	SM-285	S-959	CM180	S-524
FLKLCLF-0805D	93140829	FLPL-5_*	1/2	1/2	6	.750	.500	SM-286	S-959	CM181	S-524
FLKLCRF-1005B	93151029	FLPR-5_*	5/8	5/8	4-1/2	.750	.625	SM-285	S-959	CM180	S-524
FLKLCLF-1005B	93141029	FLPL-5_*	5/8	5/8	4-1/2	.750	.625	SM-286	S-959	CM181	S-524

*Also used with inserts FLPGR/FLPGL.

FLKPCN Profiling



Most holders available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Seat Clamp			
								Seat	Screw	Clamp	Screw
FLKPCN-0805V	93160829V	FLPR-5_*	1/2	1/2	3-1/2	1.125	.260	SM-285	S-959	CM79	S-524
FLKPCN-0805D	93160829D	FLPR-5_*	1/2	1/2	6	1.125	.260	SM-285	S-959	CM79	S-524
FLKPCN-1205B	93161229	FLPR-5_*	3/4	3/4	4-1/2	1.125	.385	SM-285	S-959	CM68	S-524

*Also used with inserts FLPGR/FLPGL.

INTERNAL BARS

A-FLDL Profiling

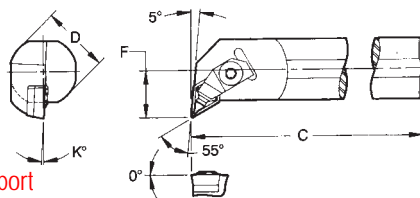

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	D	C	F	K°	Min. Bore	Seat Clamp			
								Seat	Screw	Clamp	Screw
A20-FLDLPR4	90522025	DPGR-432	1.250	14	.875	3°	1.585	SM-414	S-111	CM118	S-532
A20-FLDLPL4	90502025	DPGR-432	1.250	14	.875	3°	1.585	SM-414	S-111	CM118	S-532
A24-FLDLPR4	90522425	DPGR-432	1.500	14	1.000	2°	1.835	SM-414	S-111	CM118	S-532
A24-FLDLPL4	90502425	DPGR-432	1.500	14	1.000	2°	1.835	SM-414	S-111	CM118	S-532
A28-FLDLPR4	90522825	DPGR-432	1.750	14	1.125	2°	2.120	SM-414	S-111	CM118	S-532
A28-FLDLPL4	90502825	DPGR-432	1.750	14	1.125	2°	2.120	SM-414	S-111	CM118	S-532
A32-FLDLPR4	90523225	DPGR-432	2.000	16	1.250	2°	2.400	SM-414	S-111	CM118	S-532
A32-FLDLPL4	90503225	DPGR-432	2.000	16	1.250	2°	2.400	SM-414	S-111	CM118	S-532

PROFILING





INTERNAL BARS

A-FLKL

Profiling

Most bars available with coolant port
(ie: Add CP to end of description)

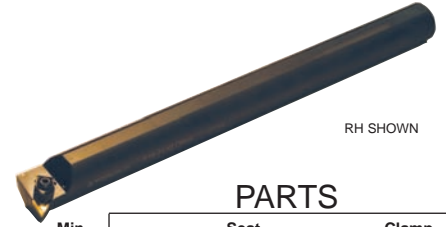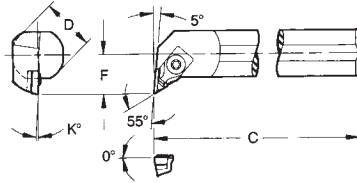

PARTS


Description	EDP Code	Insert	D	C	F	K°	Min. Bore	Seat			
								Seat	Screw	Clamp	Clamp Screw
A10-FLKLCR05	90561029	FLPL-5_*	.625	10	.500	5°	.900	SM-286	S-959	CM79	S-524
A10-FLKLCL05	90541029	FLPR-5_*	.625	10	.500	5°	.900	SM-285	S-959	CM71	S-524
A12-FLKLCR05	90561229	FLPL-5_*	.750	10	.562	5°	.980	SM-286	S-959	CM79	S-524
A12-FLKLCL05	90541229	FLPR-5_*	.750	10	.562	5°	.980	SM-285	S-959	CM71	S-524
A16-FLKLCR05	90561629	FLPL-5_*	1.000	12	.750	3°	1.300	SM-286	S-959	CM68	S-524
A16-FLKLCL05	90541629	FLPR-5_*	1.000	12	.750	3°	1.300	SM-285	S-959	CM68	S-524
A20-FLKLCR05	90562029	FLPL-5_*	1.250	14	.875	3°	1.585	SM-286	S-959	CM68	S-524
A20-FLKLCL05	90542029	FLPR-5_*	1.250	14	.875	3°	1.585	SM-285	S-959	CM68	S-524
A24-FLKLCR05	90562429	FLPL-5_*	1.500	14	1.000	2°	1.835	SM-286	S-959	CM68	S-524
A24-FLKLCL05	90542429	FLPR-5_*	1.500	14	1.000	2°	1.835	SM-285	S-959	CM68	S-524
A32-FLKLCR05	90563229	FLPL-5_*	2.000	16	1.250	2°	2.400	SM-286	S-959	CM68	S-524
A32-FLKLCL05	90543229	FLPR-5_*	2.000	16	1.250	2°	2.400	SM-285	S-959	CM68	S-524

*Also used with inserts FLPR/FLPL.

A-FLKQ

Profiling

Most bars available with coolant port
(ie: Add CP to end of description)

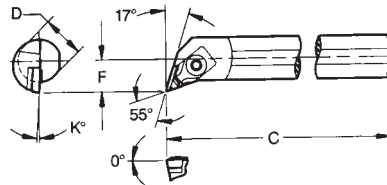

PARTS


Description	EDP Code	Insert	D	C	F	K°	Min. Bore	Seat			
								Seat	Screw	Clamp	Clamp Screw
A08-FLKQCR05	90600829	FLPL-5_*	.500	8	.375	6°	.670	-	-	CM112	S-518
A08-FLKQCL05	90580829	FLPR-5_*	.500	8	.375	6°	.670	-	-	CM111	S-518
A12-FLKQCR05	90601229	FLPL-5_*	.750	10	.562	6°	.980	SM-286	S-959	CM68	S-524
A12-FLKQCL05	90581229	FLPR-5_*	.750	10	.562	6°	.980	SM-285	S-959	CM68	S-524
A16-FLKQCR05	90601629	FLPL-5_*	1.000	12	.750	3°	1.300	SM-286	S-959	CM68	S-524
A16-FLKQCL05	90581629	FLPR-5_*	1.000	12	.750	3°	1.300	SM-285	S-959	CM68	S-524

*Also used with inserts FLPR/FLPL.

A-FLKX

Profiling

Most bars available with coolant port
(ie: Add CP to end of description)

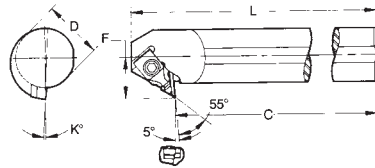

PARTS


Description	EDP Code	Insert	D	C	L	F	K°	Min. Bore	Seat			
									Seat	Screw	Clamp	Clamp Screw
A12-FLKXCR05	90641229	FLPR-5_*	.750	10	10.00	.625	5°	1.060	SM-285	S-959	CM79	S-524
A12-FLKXCL05	90621229	FLPL-5_*	.750	10	10.00	.625	5°	1.060	SM-286	S-959	CM71	S-524
A16-FLKXCR05	90641629	FLPR-5_*	1.000	12	12.00	.750	5°	1.300	SM-285	S-959	CM79	S-524
A16-FLKXCL05	90621629	FLPL-5_*	1.000	12	12.00	.750	5°	1.300	SM-286	S-959	CM71	S-524

*Also used with inserts FLPR/FLPL.

A-FLVL

Profiling

Most bars available with coolant port
(ie: Add CP to end of description)





PARTS

Description	EDP Code	Insert	D	C	F	K°	Min. Bore	Seat			
								Seat	Screw	Clamp	Clamp Screw
A20-FLVLCR3	90682026	VPGR-33	1.250	14	1.125	2°	1.830	SM-412	S-959	CM113	S-412
A20-FLVLCL3	90662026	VPGR-33	1.250	14	1.125	2°	1.830	SM-412	S-959	CM114	S-412
A24-FLVLCR3	90682426	VPGR-33	1.500	14	1.250	2°	2.120	SM-412	S-959	CM113	S-412
A24-FLVLCL3	90662426	VPGR-33	1.500	14	1.250	2°	2.120	SM-412	S-959	CM114	S-412
A32-FLVLCR3	90683226	VPGR-33	2.000	16	1.500	2°	2.620	SM-412	S-959	CM113	S-412
A32-FLVLCL3	90663226	VPGR-33	2.000	16	1.500	2°	2.620	SM-412	S-959	CM114	S-412



TOOL-FLO

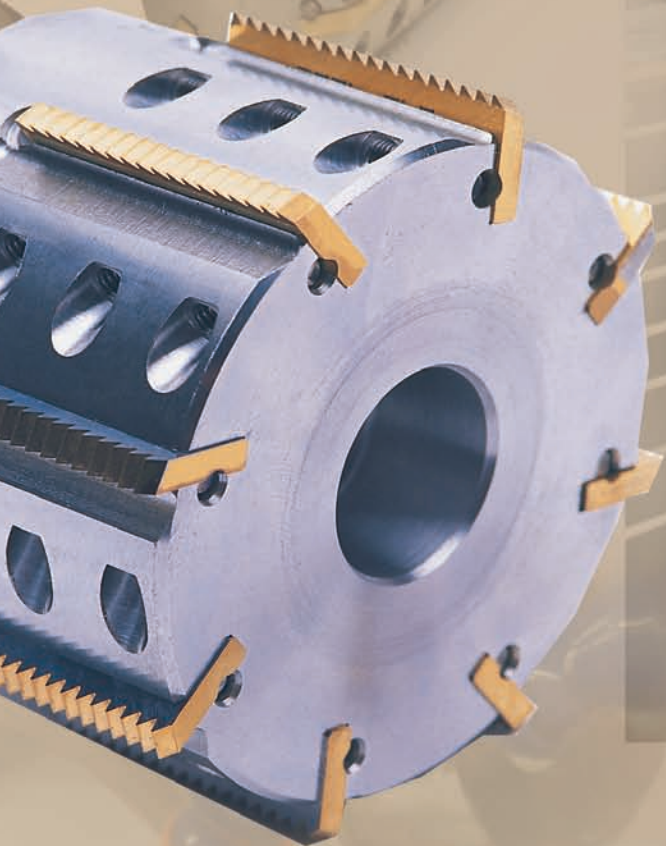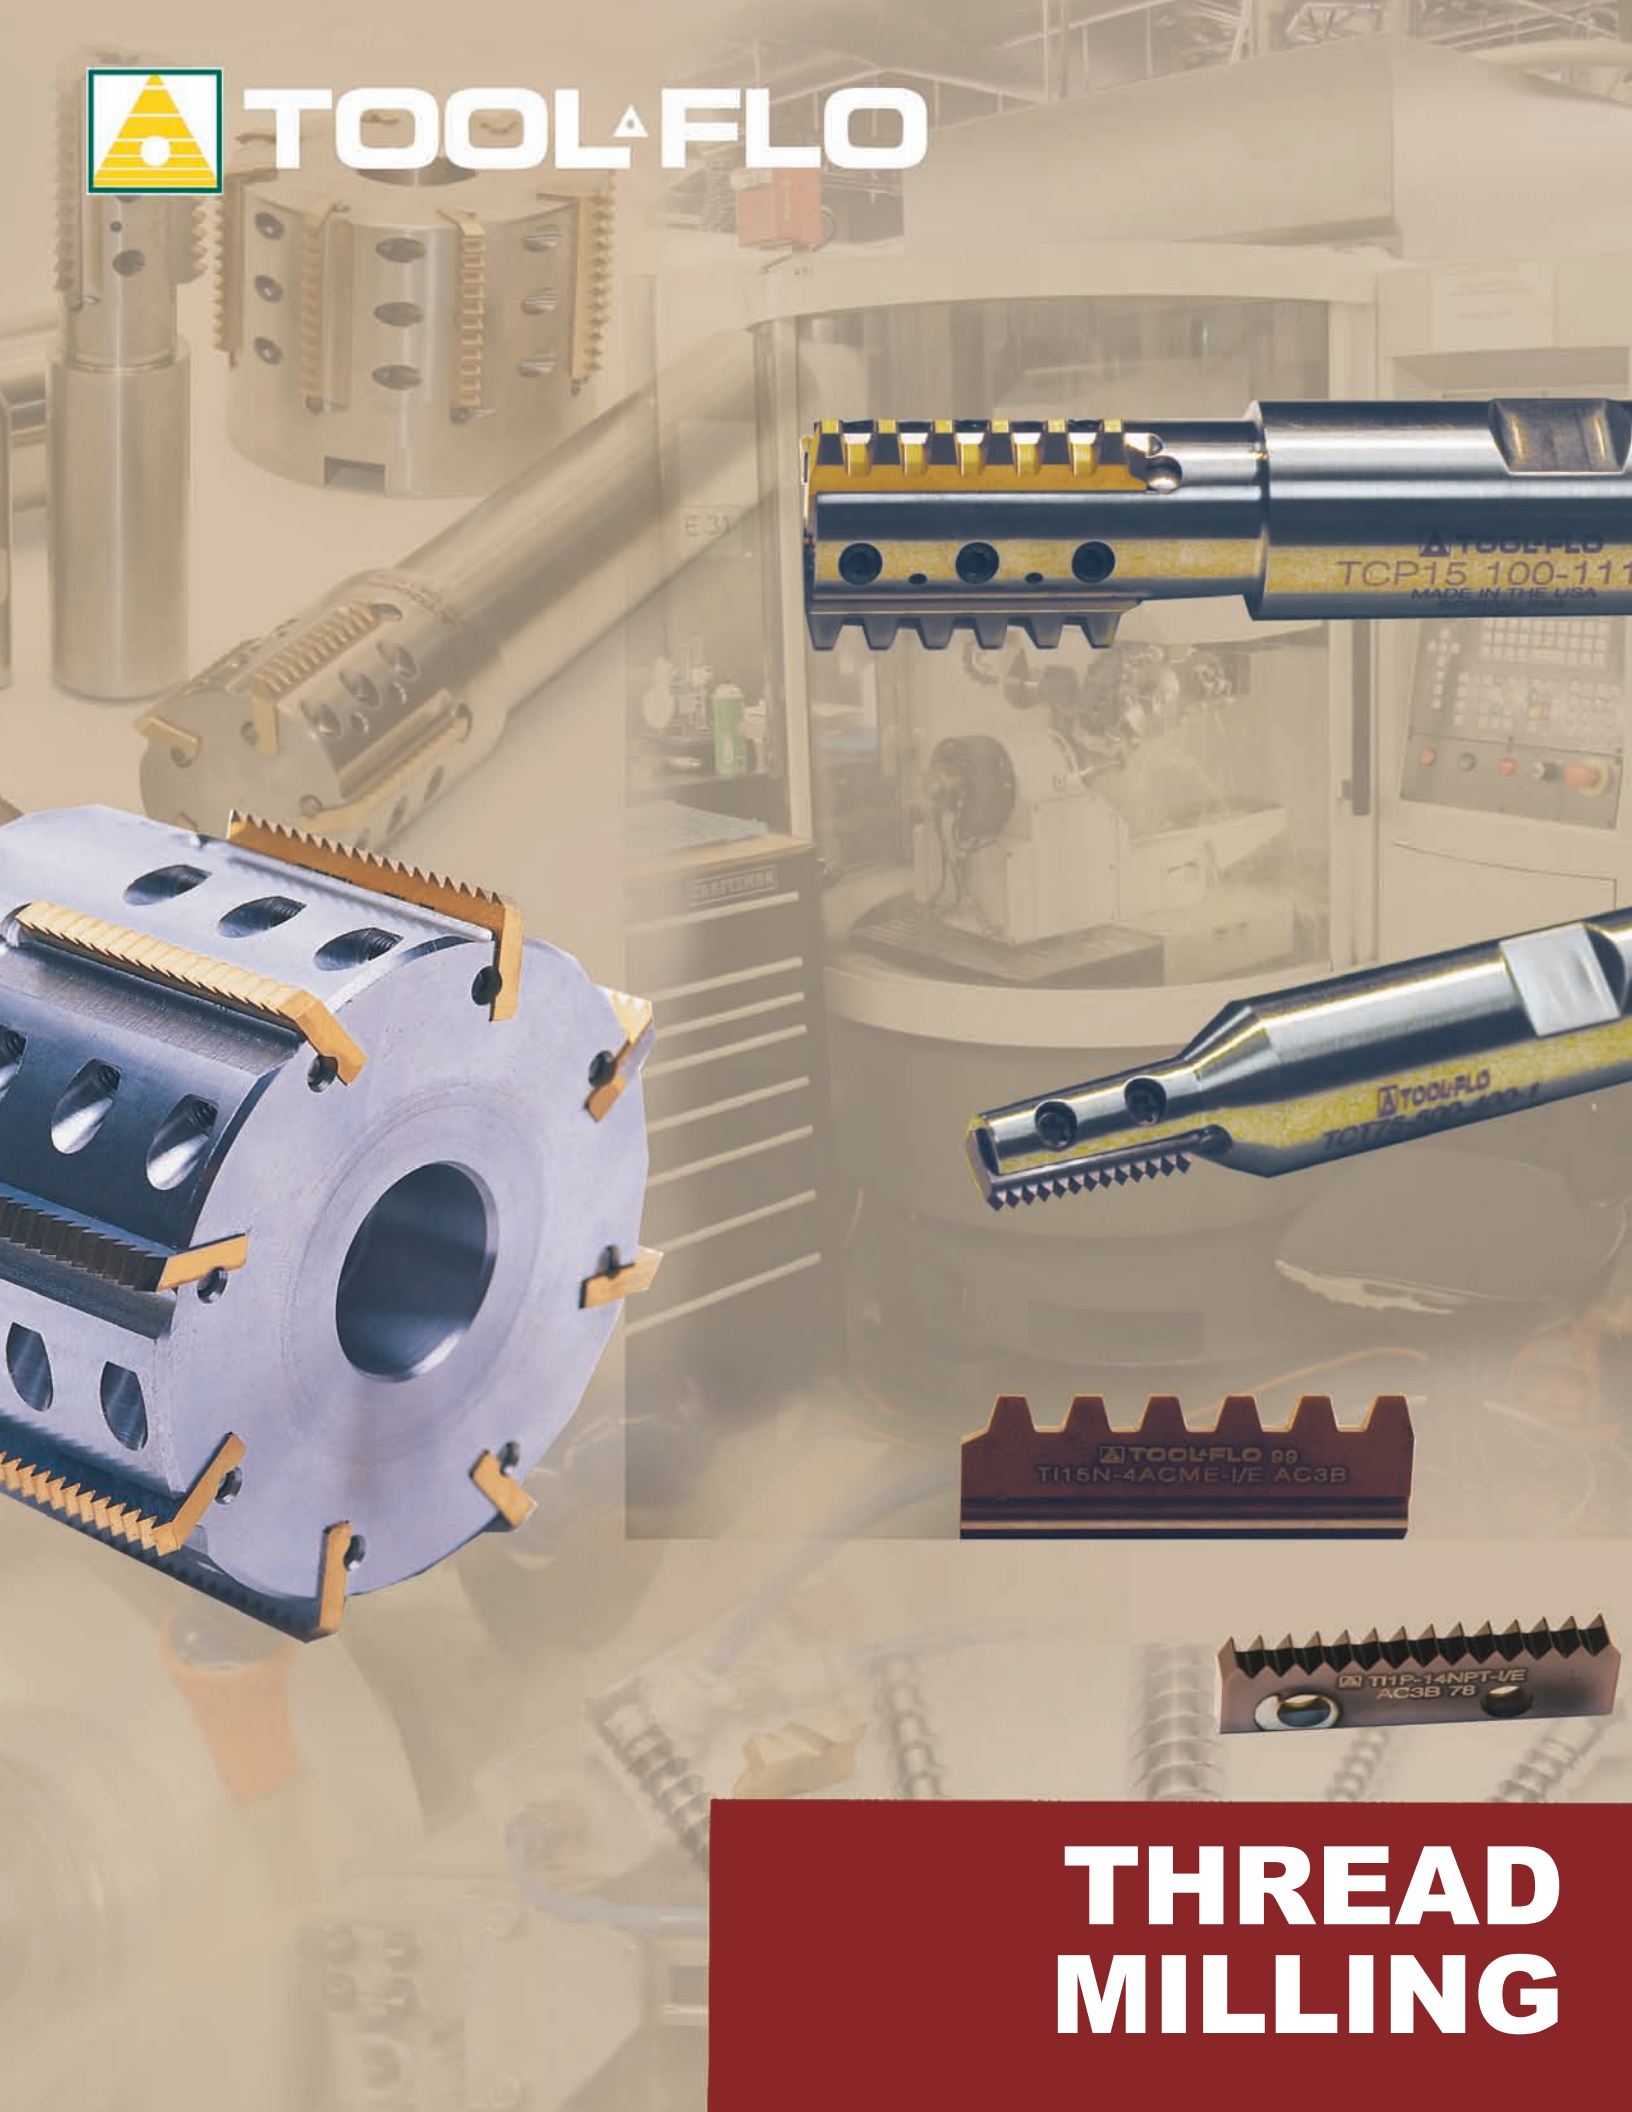


THREAD MILLING


TC SERIES THREADMILLING




Threadmilling Insert Nomenclature Chart

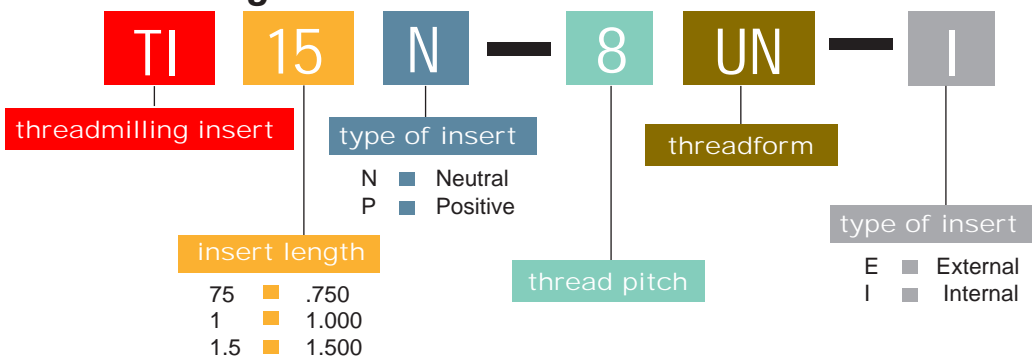

Threadmilling Cutter Nomenclature Chart

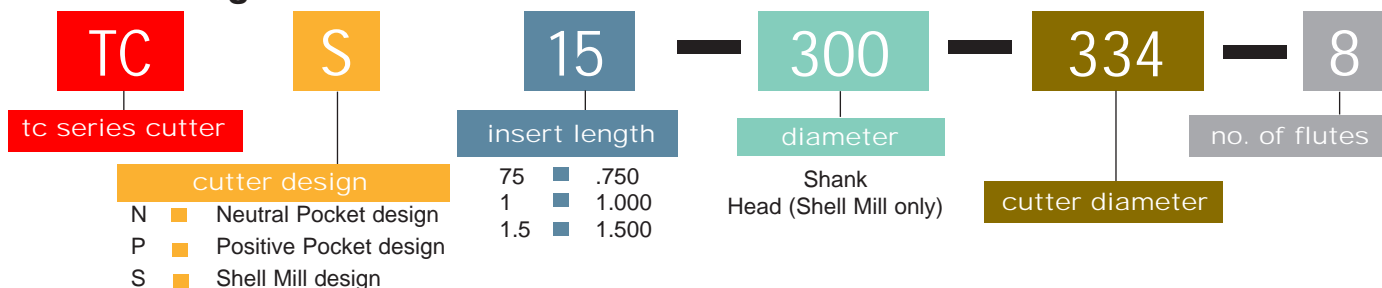

Solid Threadmill Nomenclature Chart

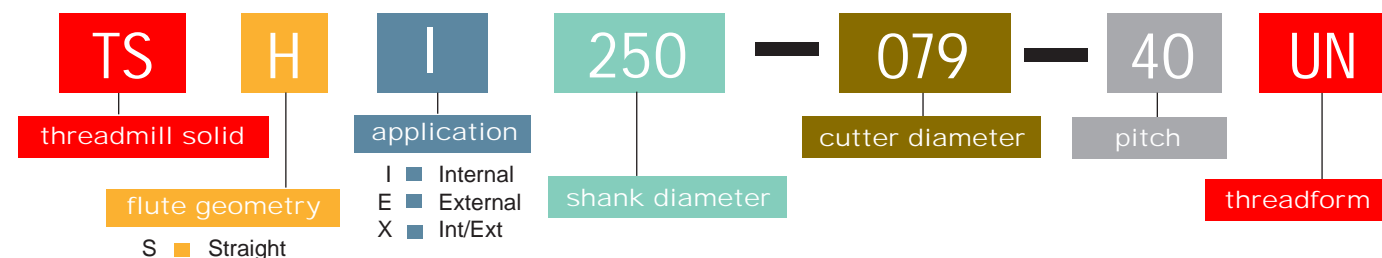

TCT/TCN

- TCT cutters offer tapered head to accommodate NPT and NPTF style inserts
- TCN cutters offer straight head to accommodate UN and ISO style inserts
- Inserts are CNC ground to tolerance of +/- .0005 effective in the cutter
- Positive geometry provides high shear action which results in better quality threads

TCP

- Cutters feature our patented locking system for accurate indexes
- Inserts are CNC ground to tolerance of +/- .0005 effective in the cutter
- Positive geometry provides high shear action which results in better quality threads
- Design allows for maximum number of flutes in minimum part diameter

TCS

- Cutters feature our patented locking system for accurate indexes
- Inserts are CNC ground to tolerance of +/- .0005 effective in the cutter
- Positive geometry provides high shear action which results in better quality threads
- Design allows for maximum number of flutes in minimum part diameter
- Run at high speeds to reduce machining time by as much as 50%

TSSI/X



- Produce better quality threads than tapping
- Excels in materials that are difficult to cut

BSPT THREADING

TI_P

Positive Rake

■ Internal/External



Description	EDP Code	Pitch	L	T	C3	GP3	ZS3
TI75P-19BSPT-I/E	TMIA4419I/E	19	.750	.080		●	●
TI1P-19BSPT-I/E	TMIB4419I/E	19	1.000	.140		●	●
TI1P-14BSPT-I/E	TMIB4414I/E	14	1.000	.140		●	●
TI1N-11BSPT-I/E - Neutral Rake	TMIC4411I/E	11	1.000	.140		●	●

	Uncoated	TIN Coated	AlTiN Coated
C3			
GP3	●	●	●
ZS3	●	●	●





TC SERIES THREADMILLING

BSPB THREADING

TI_P

Positive Rake

Internal/External



	Uncoated	TiN Coated	AlTiN Coated
C3	●	●	●
GP3	●	●	●
ZS3	●	●	●



Description	EDP Code	TPI	L	T	C3	GP3	ZS3
TI75P-19BSPB-I/E	TMIA4419I/E	19	.750	.080	●	●	●
TI1P-19BSPB-I/E	TMIB4419I/E	19	1.000	.140	●	●	●
TI1P-14BSPB-I/E	TMIB4414I/E	14	1.000	.140	●	●	●

NPT/NPTF THREADING

TI_P

Positive Rake

Internal/External



	C3	GP3	ZS3
TI75P-18NPT-I/E	●	●	●
TI75P-18NPTF-I/E	●	●	●
TI1P-14NPT-I/E	●	●	●
TI1P-14NPTF-I/E	●	●	●


Description	EDP Code	TPI	L	T	C3	GP3	ZS3
TI75P-18NPT-I/E	TMIA3618I/E	18	.750	.080	●	●	●
TI75P-18NPTF-I/E	TMIA4618I/E	18	.750	.080	●	●	●
TI1P-14NPT-I/E	TMIB3614I/E	14	1.000	.140	●	●	●
TI1P-14NPTF-I/E	TMIB4614I/E	14	1.000	.140	●	●	●

NPT/NPTF THREADING

TCT_

Cutter Bodies

Internal/External



Description	EDP Code	Insert	D	d	L	Cutter Dia	C	Flutes	Screw*
TCT75-500-400-1	TMTA084001	TI75P-18NPT/NPTF/BSPT	.500	.229	3.000	.400	.750	1	TS250
TCT1-500-659-1	TMTB086591	TI1P-14NPT/NPTF/BSPT	.500	.379	3.000	.659	1.000	1	TS45



*TS250 uses K-2 wrench, TS45 uses K-3 wrench

UN THREADING

TI_P

Positive Rake

Internal



	C3	GP3	ZS3
TI75P-32UN-I	●	●	●
TI75P-24UN-I	●	●	●
TI75P-20UN-I	●	●	●
TI75P-18UN-I	●	●	●
TI75P-16UN-I	●	●	●
TI1P-32UN-I	●	●	●
TI1P-24UN-I	●	●	●
TI1P-20UN-I	●	●	●
TI1P-18UN-I	●	●	●
TI1P-16UN-I	●	●	●
TI1P-14UN-I	●	●	●
TI1P-12UN-I	●	●	●
TI1P-10UN-I*	●	●	●

Description	EDP Code	Pitch	L	T	C3	GP3	ZS3
TI75P-32UN-I	TMIA6632I	32	.750	.080	●	●	●
TI75P-24UN-I	TMIA6624I	24	.750	.080	●	●	●
TI75P-20UN-I	TMIA6620I	20	.750	.080	●	●	●
TI75P-18UN-I	TMIA6618I	18	.750	.080	●	●	●
TI75P-16UN-I	TMIA6616I	16	.750	.080	●	●	●
TI1P-32UN-I	TMIB6632I	32	1.000	.140	●	●	●
TI1P-24UN-I	TMIB6624I	24	1.000	.140	●	●	●
TI1P-20UN-I	TMIB6620I	20	1.000	.140	●	●	●
TI1P-18UN-I	TMIB6618I	18	1.000	.140	●	●	●
TI1P-16UN-I	TMIB6616I	16	1.000	.140	●	●	●
TI1P-14UN-I	TMIB6614I	14	1.000	.140	●	●	●
TI1P-12UN-I	TMIB6612I	12	1.000	.140	●	●	●
TI1P-10UN-I*	TMIB6610I	10	1.000	.140	●	●	●

*To be used in TCN1 750-611-1 cutter only.

THREAD MILLING

TC SERIES THREADMILLING





UNJ THREADING

TI_P

Positive Rake

Internal





Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI75P-32UNJ-I	TMIA6832I	32	.750	.080			
TI75P-24UNJ-I	TMIA6824I	24	.750	.080			
TI75P-20UNJ-I	TMIA6820I	20	.750	.080			
TI75P-18UNJ-I	TMIA6818I	18	.750	.080			
TI75P-16UNJ-I	TMIA6816I	16	.750	.080			
TI1P-32UNJ-I	TMIB6832I	32	1.000	.140			
TI1P-24UNJ-I	TMIB6824I	24	1.000	.140			
TI1P-20UNJ-I	TMIB6820I	20	1.000	.140			
TI1P-18UNJ-I	TMIB6818I	18	1.000	.140			
TI1P-16UNJ-I	TMIB6816I	16	1.000	.140			
TI1P-14UNJ-I	TMIB6814I	14	1.000	.140			
TI1P-12UNJ-I	TMIB6812I	12	1.000	.140			
TI1P-10UNJ-I	TMIB6810I	10	1.000	.140			

ISO THREADING

TI_P

Positive Rake

Internal





Description	EDP Code	Pitch	L	T	Coating		
					C3	GP3	ZS3
TI75P-1.5 ISO-I	TMIA7015I	1,5	.750	.080			
TI75P-1.25 ISO-I	TMIA70125I	1,25	.750	.080			
TI75P-1.0 ISO-I	TMIA7010I	1,0	.750	.080			
TI75P-0.5 ISO-I	TMIA7005I	0,5	.750	.080			
TI1P-2.0 ISO-I	TMIB7020I	2,0	1.000	.140			
TI1P-1.5 ISO-I	TMIB7015I	1,5	1.000	.140			
TI1P-1.0 ISO-I	TMIB7010I	1,0	1.000	.140			

UN THREADING

TI_P

Positive Rake

External





Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI75P-32UN-E	TMIA6632E	32	.750	.080			
TI75P-24UN-E	TMIA6624E	24	.750	.080			
TI75P-20UN-E	TMIA6620E	20	.750	.080			
TI75P-18UN-E	TMIA6618E	18	.750	.080			
TI75P-16UN-E	TMIA6616E	16	.750	.080			
TI1P-32UN-E	TMIB6632E	32	1.000	.140			
TI1P-24UN-E	TMIB6624E	24	1.000	.140			
TI1P-20UN-E	TMIB6620E	20	1.000	.140			
TI1P-18UN-E	TMIB6618E	18	1.000	.140			
TI1P-16UN-E	TMIB6616E	16	1.000	.140			
TI1P-12UN-E	TMIB6612E	12	1.000	.140			

UNJ THREADING

TI_P

Positive Rake

External



Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI75P-32UNJ-E	TMIA6832E	32	.750	.080			
TI75P-24UNJ-E	TMIA6824E	24	.750	.080			
TI75P-20UNJ-E	TMIA6820E	20	.750	.080			
TI75P-18UNJ-E	TMIA6818E	18	.750	.080			
TI75P-16UNJ-E	TMIA6816E	16	.750	.080			
TI1P-32UNJ-E	TMIB6832E	32	1.000	.140			
TI1P-24UNJ-E	TMIB6824E	24	1.000	.140			
TI1P-20UNJ-E	TMIB6820E	20	1.000	.140			
TI1P-18UNJ-E	TMIB6818E	18	1.000	.140			
TI1P-16UNJ-E	TMIB6816E	16	1.000	.140			
TI1P-12UNJ-E	TMIB6812E	12	1.000	.140			

THREAD MILLING





TC SERIES THREADMILLING

ISO THREADING

TI1P

Positive Rake

■ External



Description	EDP Code	Pitch	L	T	C3	GP3	ZS3
TI1P-2.0 ISO-E	TMIB7020E	2,0	1.000	.140	●	●	●
TI1P-1.5 ISO-E	TMIB7015E	1,5	1.000	.140	●	●	●
TI1P-1.0 ISO-E	TMIB7010E	1,0	1.000	.140	●	●	●



Uncoated	TIN Coated	AlTiN Coated
●	●	●
●	●	●
●	●	●

UN THREADING

TCN₁

Cutter Bodies

■ Internal/External



Description	EDP Code	Insert	D	d	L	Cutter Dia	C	Flutes	Screw*
TCN75-500-394-1	TMNA083941	TI75P-UN/ISO/BSPP/NGT/SGT/UNJ	.500	.250	3.000	.394	.750	1	TS250
TCN75-500-468-1	TMNA084681	TI75P-UN/ISO/BSPP/NGT/SGT/UNJ	.500	.330	3.500	.468	.750	1	TS25
TCN1-750-625-1	TMNB126251	TI1P-UN/ISO/BSPP/NGT/SGT/UNJ	.750	.454	3.500	.625	1.000	1	TS40
TCN1-750-611-1	TMNB126111	TI1P-10UN	.750	.383	3.500	.611	1.000	1	TS40



*TS250 and TS25 uses K-2 wrench, TS40 uses K-3 wrench

NGT/SGT THREADING

TI_N

Neutral Rake

■ Internal/External



Description	EDP Code	TPI	L	T	C3	GP3	ZS3
TI15N-14NGT-I/E	TMID4714I/E	14	1.500	.140	●	●	●
TI15N-14SGT-I/E	TMID4914I/E	14	1.500	.140	●	●	●


Uncoated	TIN Coated	AlTiN Coated
●	●	●
●	●	●
●	●	●

NPT/NPTF THREADING

TI_N

Neutral Rake

■ Internal/External



Description	EDP Code	TPI	L	T	C3	GP3	ZS3
TI15N-11.5NPT-I/E	TMID3611I/E	11.5	1.500	.140	●	●	●
TI15N-11.5NPTF-I/E	TMID4611I/E	11.5	1.500	.140	●	●	●
TI15N-8NPT-I/E	TMID3608I/E	8	1.500	.140	●	●	●
TI15N-8NPTF-I/E	TMID4608I/E	8	1.500	.140	●	●	●



Uncoated	TIN Coated	AlTiN Coated
●	●	●
●	●	●
●	●	●

API ROUND THREADING

TI15N

Neutral Rake

■ Internal/External



Description	EDP Code	TPI	L	T	C3	GP3	ZS3
TI15N-10RD-I/E	TMID3410I/E	10	1.500	.140	●	●	●
TI15N-8RD-I/E	TMID3200I/E	8	1.500	.140	●	●	●

Uncoated	TIN Coated	AlTiN Coated
●	●	●
●	●	●
●	●	●

THREAD MILLING

TC SERIES THREADMILLING




UN THREADING

TI_N

Neutral Rake

Internal

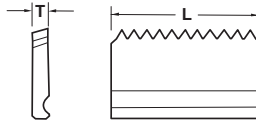


Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI1N-32UN-I	TMIC6632I	32	1.000	.140	●	●	●
TI1N-24UN-I	TMIC6624I	24	1.000	.140	●	●	●
TI1N-20UN-I	TMIC6620I	20	1.000	.140	●	●	●
TI1N-18UN-I	TMIC6618I	18	1.000	.140	●	●	●
TI1N-16UN-I	TMIC6616I	16	1.000	.140	●	●	●
TI1N-12UN-I	TMIC6612I	12	1.000	.140	●	●	●
TI1N-10UN-I	TMIC6610I	10	1.000	.140	●	●	●
TI15N-24UN-I	TMID6624I	24	1.500	.140	●	●	●
TI15N-20UN-I	TMID6620I	20	1.500	.140	●	●	●
TI15N-18UN-I	TMID6618I	18	1.500	.140	●	●	●
TI15N-16UN-I	TMID6616I	16	1.500	.140	●	●	●
TI15N-14UN-I	TMID6614I	14	1.500	.140	●	●	●
TI15N-12UN-I	TMID6612I	12	1.500	.140	●	●	●
TI15N-10UN-I	TMID6610I	10	1.500	.140	●	●	●
TI15N-8UN-I	TMID6608I	8	1.500	.140	●	●	●
TI15N-7UN-I	TMID6607I	7	1.500	.140	●	●	●
TI15N-6UN-I	TMID6606I	6	1.500	.140	●	●	●

UNJ THREADING

TI_N

Neutral Rake

Internal

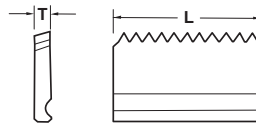


Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI1N-32UNJ-I	TMIC6832I	32	1.000	.140	●	●	●
TI1N-24UNJ-I	TMIC6824I	24	1.000	.140	●	●	●
TI1N-20UNJ-I	TMIC6820I	20	1.000	.140	●	●	●
TI1N-18UNJ-I	TMIC6818I	18	1.000	.140	●	●	●
TI1N-16UNJ-I	TMIC6816I	16	1.000	.140	●	●	●
TI1N-12UNJ-I	TMIC6812I	12	1.000	.140	●	●	●
TI1N-10UNJ-I	TMIC6810I	10	1.000	.140	●	●	●
TI15N-24UNJ-I	TMID6824I	24	1.500	.140	●	●	●
TI15N-20UNJ-I	TMID6820I	20	1.500	.140	●	●	●
TI15N-18UNJ-I	TMID6818I	18	1.500	.140	●	●	●
TI15N-16UNJ-I	TMID6816I	16	1.500	.140	●	●	●
TI15N-12UNJ-I	TMID6812I	12	1.500	.140	●	●	●
TI15N-10UNJ-I	TMID6810I	10	1.500	.140	●	●	●
TI15N-8UNJ-I	TMID6808I	8	1.500	.140	●	●	●

ISO THREADING

TI15N

Neutral Rake

Internal

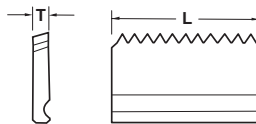

Description	EDP Code	TPI	L	T	Coating		
					C3	GP3	ZS3
TI15N-6.0 ISO-I	TMID7060I	6.0	1.500	.140	●	●	●
TI15N-5.0 ISO-I	TMID7050I	5.0	1.500	.140	●	●	●
TI15N-4.5 ISO-I	TMID7045I	4.5	1.500	.140	●	●	●
TI15N-4.0 ISO-I	TMID7040I	4.0	1.500	.140	●	●	●
TI15N-3.5 ISO-I	TMID7035I	3.5	1.500	.140	●	●	●
TI15N-3.0 ISO-I	TMID7030I	3.0	1.500	.140	●	●	●
TI15N-2.5 ISO-I	TMID7025I	2.5	1.500	.140	●	●	●
TI15N-2.0 ISO-I	TMID7020I	2.0	1.500	.140	●	●	●
TI15N-1.5 ISO-I	TMID7015I	1.5	1.500	.140	●	●	●




TC SERIES THREADMILLING

ACME THREADING

TI_N

Neutral Rake - Full Profile

■ Internal/External




Description	EDP Code	TPI	L	T	C3	GP3	ZS3
T11N-12ACME-I/E	TMIC0212I/E	12	1.000	.140	●	●	●
T11N-10ACME-I/E	TMIC0210I/E	10	1.000	.140	●	●	●
T11N-8ACME-I/E	TMIC0208I/E	8	1.000	.140	●	●	●
T115N-12ACME-I/E	TMID0212I/E	12	1.500	.140	●	●	●
T115N-10ACME-I/E	TMID0210I/E	10	1.500	.140	●	●	●
T115N-8ACME-I/E	TMID0208I/E	8	1.500	.140	●	●	●
T115N-6ACME-I/E	TMID0206I/E	6	1.500	.140	●	●	●
T115N-5ACME-I/E	TMID0205I/E	5	1.500	.140	●	●	●
T115N-4ACME-I/E	TMID0204I/E	4	1.500	.140	●	●	●

UN THREADING

TI_N

Neutral Rake

■ External




Description	EDP Code	TPI	L	T	Coating		
					Uncoated	TIN Coated	AlTiN Coated
					C3	GP3	ZS3
T11N-32UN-E	TMIC6632E	32	1.000	.140	●	●	●
T11N-24UN-E	TMIC6624E	24	1.000	.140	●	●	●
T11N-20UN-E	TMIC6620E	20	1.000	.140	●	●	●
T11N-18UN-E	TMIC6618E	18	1.000	.140	●	●	●
T11N-16UN-E	TMIC6616E	16	1.000	.140	●	●	●
T11N-12UN-E	TMIC6612E	12	1.000	.140	●	●	●
T11N-10UN-E	TMIC6610E	10	1.000	.140	●	●	●
T115N-24UN-E	TMID6624E	24	1.500	.140	●	●	●
T115N-20UN-E	TMID6620E	20	1.500	.140	●	●	●
T115N-18UN-E	TMID6618E	18	1.500	.140	●	●	●
T115N-16UN-E	TMID6616E	16	1.500	.140	●	●	●
T115N-12UN-E	TMID6612E	12	1.500	.140	●	●	●
T115N-10UN-E	TMID6610E	10	1.500	.140	●	●	●
T115N-8UN-E	TMID6608E	8	1.500	.140	●	●	●
T115N-6UN-E	TMID6606E	6	1.500	.140	●	●	●

UNJ THREADING

TI_N

Neutral Rake

■ External




Description	EDP Code	TPI	L	T	Coating		
					Uncoated	TIN Coated	AlTiN Coated
					C3	GP3	ZS3
T11N-32UNJ-E	TMIC6832E	32	1.000	.140	●	●	●
T11N-24UNJ-E	TMIC6824E	24	1.000	.140	●	●	●
T11N-20UNJ-E	TMIC6820E	20	1.000	.140	●	●	●
T11N-18UNJ-E	TMIC6818E	18	1.000	.140	●	●	●
T11N-16UNJ-E	TMIC6816E	16	1.000	.140	●	●	●
T11N-12UNJ-E	TMIC6812E	12	1.000	.140	●	●	●
T11N-10UNJ-E	TMIC6810E	10	1.000	.140	●	●	●
T115N-24UNJ-E	TMID6824E	24	1.500	.140	●	●	●
T115N-20UNJ-E	TMID6820E	20	1.500	.140	●	●	●
T115N-18UNJ-E	TMID6818E	18	1.500	.140	●	●	●
T115N-16UNJ-E	TMID6816E	16	1.500	.140	●	●	●
T115N-12UNJ-E	TMID6812E	12	1.500	.140	●	●	●
T115N-10UNJ-E	TMID6810E	10	1.500	.140	●	●	●
T115N-8UNJ-E	TMID6808E	8	1.500	.140	●	●	●

ISO THREADING

TI15N

Neutral Rake

■ External



Description	EDP Code	TPI	L	T	Coating		
					Uncoated	TIN Coated	AlTiN Coated
					C3	GP3	ZS3
T115N-6.0 ISO-E	TMID7060E	6.0	1.500	.140	●	●	●
T115N-5.0 ISO-E	TMID7050E	5.0	1.500	.140	●	●	●
T115N-4.5 ISO-E	TMID7045E	4.5	1.500	.140	●	●	●
T115N-4.0 ISO-E	TMID7040E	4.0	1.500	.140	●	●	●
T115N-2.0 ISO-E	TMID7020E	2.0	1.500	.140	●	●	●

THREAD MILLING



TC SERIES THREADMILLING



UN/NPT/ISO/ACME/API THREADING

TCP_ Cutter Bodies

Internal/External

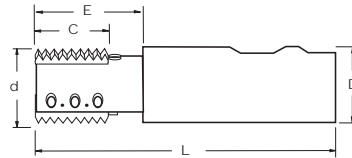



Description	EDP Code	Insert	Coolant Port	D	d	E	L	Cutter Dia. (UN/115NPT)	Cutter Dia. (8NPT)	C	Flutes	Screw	Pin
TCP1 100-969-2	TMPB169692	T11N		1.000	.750	1.500	4.500	.969	.969	1.000	2	TSS-3	DP1
TCP1 125-175-5	TMPB201755	T11N	✓	1.250	1.500	1.750	4.000	1.755	1.755	1.000	5	TSS-2	DP1
TCP15 100-932-1	TMPC169321	T115N		1.000	.722	1.900	4.500	.932	1.065	1.500	1	TSS-2	DP135
TCP15 100-111-3	TMPC161113	T115N	✓	1.000	.812	2.000	4.500	1.116	1.247	1.500	3	TSS-3	DP135
TCP15 125-175-5	TMPC201755	T115N	✓	1.250	1.500	2.550	4.500	1.755	1.888	1.500	5	TSS-2	DP135
TCP15 125-175-5L	TMPC201755L	T115N	✓	1.250	1.500	2.750	8.750	1.755	1.888	1.500	5	TSS-2	DP135

UN/NPT/ISO/ACME THREADING

TCS_ Shell Mill Cutter Bodies

Internal/External

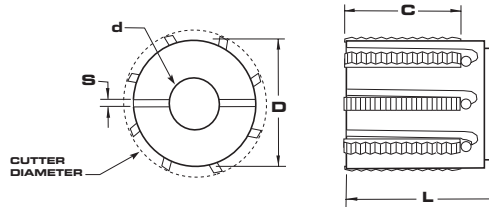


Description	EDP Code	Insert	D	d	S	L	Cutter Dia.	C	Flutes	Pin	Screw
TCS15 200-234-6	TMSC322346	T115N	2.000	.750	.250	2.250	2.349	1.500	6	DP135	TSS-2
TCS15 250-274-7	TMSC402747	T115N	2.500	1.000	.375	2.250	2.846	1.500	7	DP135	TSS-2
TCS15 300-334-8	TMSC483348	T115N	3.000	1.250	.500	2.250	3.341	1.500	8	DP135	TSS-2

UN THREADING

TSSI Solid Threadmills

Internal

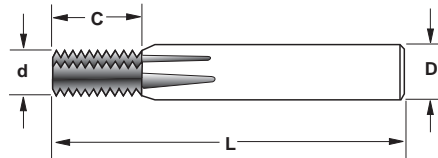


Min. I.D. Thread/Pitch	Description	EDP Code	d	C	Flutes	D	L	AC22
8-32	TSSI 125-120-32UN	TMCS0012032U	.120	.250	3	.125	1.500	●
12-24	TSSI 187-140-24UN	TMCS0114024U	.140	.417	3	.187	1.650	●
12-28	TSSI 187-145-28UN	TMCS0114528U	.145	.321	3	.187	1.650	●
10-32	TSSI 187-140-32UN	TMCS0114032U	.140	.343	3	.187	1.650	●
1/4-20	TSSI 187-160-20UN	TMCS0116020U	.160	.400	3	.187	1.650	●
5/16-18	TSSI 250-200-18UN	TMCS0220018U	.200	.500	3	.250	2.250	●
5/16-24	TSSI 250-200-24UN	TMCS0220024U	.200	.500	3	.250	2.250	●
3/8-16	TSSI 250-240-16UN	TMCS0224016U	.240	.563	5	.250	2.250	●
3/8-24	TSSI 250-240-24UN	TMCS0224024U	.240	.583	5	.250	2.250	●
7/16-14	TSSI 312-310-14UN	TMCS0431014U	.310	.625	5	.312	2.480	●
7/16-20	TSSI 312-310-20UN	TMCS0431020U	.310	.750	5	.312	2.480	●
1/2-13	TSSI 312-310-13UN	TMCS0431013U	.310	.769	5	.312	2.480	●
9/16-12	TSSI 375-375-12UN	TMCS0637512U	.375	.917	5	.375	2.840	●
9/16-18	TSSI 375-375-18UN	TMCS0637518U	.370	.944	5	.375	2.840	●
5/8-11	TSSI 500-437-11UN	TMCS0843711U	.437	1.090	5	.500	3.270	●
3/4-10	TSSI 500-470-10UN	TMCS0847010U	.470	1.100	5	.500	3.270	●
3/4-12	TSSI 500-470-12UN	TMCS0847012U	.470	1.167	5	.500	3.270	●
7/8-14	TSSI 500-470-14UN	TMCS0847014U	.470	1.142	5	.500	3.270	●
1-8	TSSI 625-620-8UN	TMCS1062008U	.620	1.500	6	.625	3.620	●

THREAD MILLING

NPT THREADING

TSSX Solid Threadmills

Internal/External

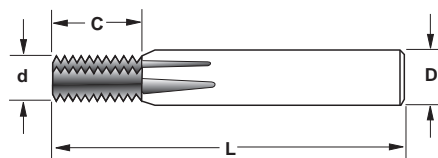

Min. I.D. Thread/Pitch	Description	EDP Code	d	C	Flutes	D	L	AC22
1/16&1/8-27	TSSX 250-240-27NPT	TMCS0224027N	.240	.370	5	.250	2.250	●
1/4&3/8-18	TSSX 312-310-18NPT	TMCS0431018N	.310	.556	5	.312	2.480	●
1/2&3/4-14	TSSX 500-470-14NPT	TMCS0847014N	.470	.786	5	.500	3.270	●



TC SERIES THREADMILLING

Threadmilling Kits



NPT THREADING KITS

1 8NPT-THREADING

KIT #101

Kit Contents

1	TCT75 500-400-1
4	TI75-18NPT AC3
1	T8 WRENCH
1	TS252 INSERT SCREW

1 4NPT-THREADING

KIT #102

Kit Contents

1	TCT1 500-659-1
4	TI1P-14NPT AC3
1	T8 WRENCH
1	TS252 INSERT SCREW

UN THREADING KITS

1 6UN-THREADING

KIT #201

Kit Contents

1	TCN75 500-394-1
4	TI75P-16UN AC3
1	T8 WRENCH
1	TS252 INSERT SCREW

1 8UN-THREADING

KIT #202

Kit Contents

1	TCN75 500-394-1
4	TI75P-18UN AC3
1	T8 WRENCH
1	TS252 INSERT SCREW

24UN-THREADING

KIT #204

Kit Contents

1	TCN75 500-394-1
4	TI75P-24UN AC3
1	T6 WRENCH
1	TS252 INSERT SCREW

20UN-THREADING

KIT #203

Kit Contents

1	TCN75 500-394-1
4	TI75P-20UN AC3
1	T8 WRENCH
1	TS252 INSERT SCREW

32UN-THREADING

KIT #205

Kit Contents



1	TCN75 500-394-1
4	TI75P-32UN AC3
1	T6 WRENCH
1	TS252 INSERT SCREW

*We welcome specials!
Please call us with your
specs.*

MILL GROOVING INSERT

TFMG



Grooving



Description	EDP Code	W	D.O.C.	R	F	GP22
TFMG-039W	9MG039	0.039	.177	-	0.854	●
TFMG-056W	9MG056	0.056	.177	-	0.854	●
TFMG-062W	9MG062	0.062	.177	0.008	0.854	●
TFMG-078W	9MG078	0.078	.177	0.008	0.854	●
TFMG-094W	9MG094	0.094	.177	0.008	0.854	●
TFMG-125W	9MG125	0.125	.177	0.008	0.854	●
TFMG-187W	9MG187	0.187	.177	0.008	0.854	●
TFMG-250W	9MG250	0.250	.177	0.008	0.854	●

MILL GROOVING HOLDER

TFM



Description	EDP Code	C	L	D	F	Insert Screw
TFM-7-12M-100C	9CMI712M100	Straight shank	100mm	12mm	0.854	SD25
TFM-7-12M-130C	9CMI712M130	Straight shank	130mm	12mm	0.854	SD25
TFM-7-16M-42C	9CMI716M42	42mm	100mm	16mm	0.854	SD25
TFM-7-16M-60C	9CMI716M60	60mm	130mm	16mm	0.854	SD25
TFM-7-16M-85C	9CMI716M85	85mm	160mm	16mm	0.854	SD25
TFM-7-500-394C	9CMI7500394	Straight shank	3.94	0.500	0.854	SD25
TFM-7-500-512C	9CMI7500512	Straight shank	5.12	0.500	0.854	SD25
TFM-7-625-165C	9CMI7625165	1.650	3.94	0.625	0.854	SD25
TFM-7-625-236C	9CMI7625236	2.630	5.12	0.625	0.854	SD25
TFM-7-625-335C	9CMI7625335	3.350	6.30	0.625	0.854	SD25

THREAD
MILLING




Technical Information

NPT & NPTF

When programming an NPT or NPTF thread form, a correction factor to compensate for the tapered thread form may need to be made. This is achieved by dividing the circular move into quarters or eighths, and moving the cutter out as the arc is generated so that the taper is included in the movement. The amount of taper for a given form is determined by the following formula:

$$\text{Taper per pitch} = \frac{.0625''}{\text{pitch}}$$

This amount of taper per pitch is then divided by number of programmed quadrants. This determines the amount that the cutter forms of the thread.

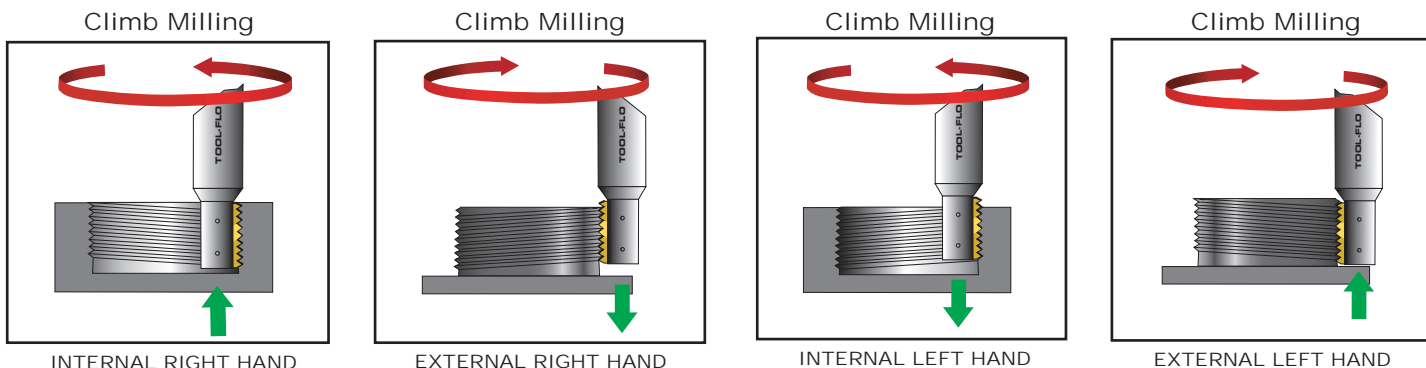

NPT SELECTION CHART		
SIZE	CUTTER	INSERT
1/4", 3/8"	TCT75 500-400-1	TI75P-18NPT
1/2", 3/4"	TCT1 500-659-1	TI1P-14NPT
1"	TCP15 100-932-1	TI15N-11.5NPT
1-1/4", 1-1/2"	TCP15 100-111-3	TI15N-11.5NPT
2"	TCP15 125-175-5	TI15N-11.5NPT
3"	TCP15 125-175-5	TI15N-8NPT


RECOMMENDED SPEED AND FEED RATES		
MATERIAL	CHIP LOAD	SPEED (SFPM)
1018 Steel	.0008 - .002	250 - 500
Standard steel (4140)	.0005 - .002	175 - 350
300 Series Stainless	.0005 - .0035	250 - 500
400 Series Stainless	.0002 - .0015	125 - 300
Gray Iron	.0005 - .003	400 - 800
Ductile iron	.001 - .005	600 - 1000
Aluminum	.0015 - .006	800 - 1200
Brass	.002 - .0065	400 - 700

Minimum internal thread size vs pitch for given cutter body for UN threads

cutter body description	pitch	32	24	20	18	16	14	12	10	8
TCN75 500-394-1		1/2"	1/2"	1/2"	9/16"	9/16"	9/16"	9/16"		
TCN75 500-468-1		5/8"	5/8"	5/8"	5/8"	5/8"	11/16"	11/16"		
TCN1 750-625-1		3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"		
TCP1 100-969-2		1-1/8"	1-1/8"	1-1/8"	1-3/16"	1-3/16"	1-3/16"	1-3/16"		
TCP1 125-175-5		1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"	1-15/16"		
TCP15 100-932-1				1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"	1-1/8"
TCP15 100-111-3				1-5/16"	1-5/16"	1-5/16"	1-5/16"	1-5/16"	1-3/8"	1-3/8"
TCP15 125-175-5				1-15/16"	1-15/16"	1-15/16"	2"	2"	2"	2"



TOOL FLO

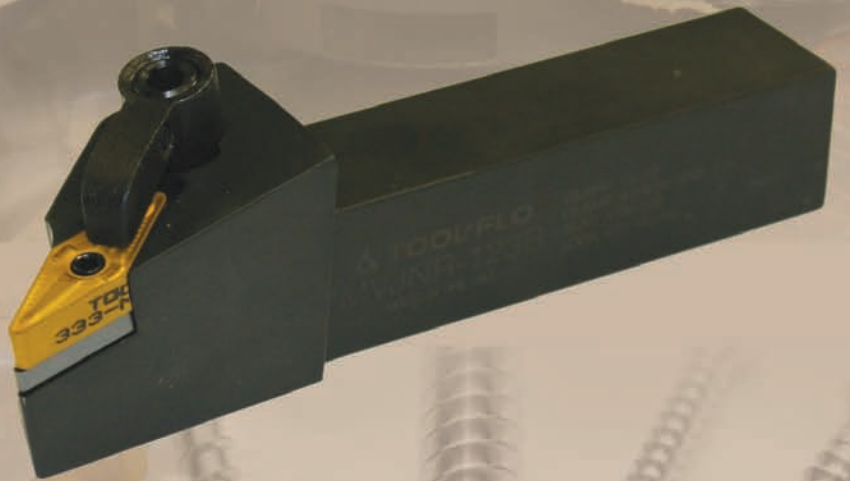


TURNING

TURNING




CNMG 80° General Purpose

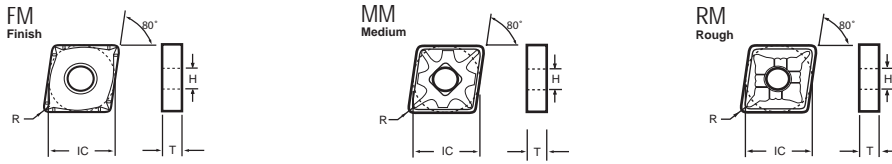


ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
CNMG-322 MM	CNMG-090308 MM	JBMGG2MM	.375	.031	.125	.150	●	●		
CNMG-431 FM	CNMG-120404 FM	JBMGJ1FM	.500	.016	.187	.203	●	●		●
CNMG-431 MM	CNMG-120404 MM	JBMGJ1MM	.500	.016	.187	.203	●	●		
CNMG-432 FM	CNMG-120408 FM	JBMGJ2FM	.500	.031	.187	.203	●	●		●
CNMG-432 MM	CNMG-120408 MM	JBMGJ2MM	.500	.031	.187	.203	●	●		
CNMG-432 RM	CNMG-120408 RM	JBMGJ2RM	.500	.031	.187	.203	●	●	●	●
CNMG-433 MM	CNMG-120412 MM	JBMGJ3MM	.500	.047	.187	.203	●	●		
CNMG-433 RM	CNMG-120412 RM	JBMGJ3RM	.500	.047	.187	.203	●	●	●	●
CNMG-543 RM	CNMG-160612 RM	JBMG3RM	.625	.047	.250	.253	●	●		
CNMG-643 RM	CNMG-190612 RM	JBMGR3RM	.750	.047	.250	.313	●	●		
CNMG-644 RM	CNMG-190616 RM	JBMGR4RM	.750	.063	.250	.313	●	●		

CNMM 80° Roughing



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
CNMM-432 HR	CNMM-120408 HR	JBMMJ2HR	.500	.031	.187	.203	●	●		
CNMM-433 HR	CNMM-120412 HR	JBMMJ3HR	.500	.047	.187	.203	●	●		
CNMM-543 HR	CNMM-160612 HR	JBMMO3HR	.625	.047	.250	.253	●	●		
CNMM-644 HR	CNMM-090616 HR	JBMMR4HR	.750	.063	.250	.313	●	●		

DNMG 55° General Purpose

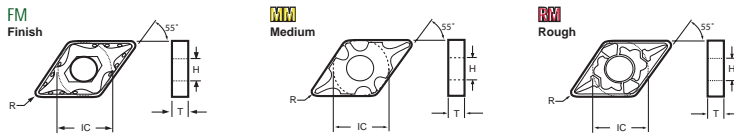


ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
DNMG-331 MM	DNMG-110404 MM	JEMGG1MM	.375	.016	.187	.150				
DNMG-332 MM	DNMG-110408 MNS	JEMGG2MM	.375	.031	.187	.150				
DNMG-431 FM	DNMG-150404 FM	JEMGJ1FM	.500	.016	.187	.203	●	●		
DNMG-431 MM	DNMG-150404 MM	JEMGJ1MM	.500	.016	.187	.203	●	●		
DNMG-432 FM	DNMG-150408 FM	JEMGJ2FM	.500	.031	.187	.203	●	●		
DNMG-432 MM	DNMG-150408 MM	JEMGJ2MM	.500	.031	.187	.203	●	●		
DNMG-432 RM	DNMG-150408 RM	JEMGJ2RM	.500	.031	.187	.203	●	●	●	●
DNMG-433 MM	DNMG-150412 MM	JEMGJ3MM	.500	.047	.187	.203	●	●		
DNMG-433 RM	DNMG-150412 RM	JEMGJ3RM	.500	.047	.187	.203	●	●	●	●
DNMG-441 FM	DNMG-150604 FM	JEMGN1FM	.500	.016	.250	.203	●	●		
DNMG-442 FM	DNMG-150608 FM	JEMGN2FM	.500	.031	.250	.203	●	●		
DNMG-442 MM	DNMG-150608 MM	JEMGN2MM	.500	.031	.250	.203	●	●		
DNMG-442 RM	DNMG-150608 RM	JEMGN2RM	.500	.031	.250	.203	●	●		
DNMG-443 MM	DNMG-150612 MM	JEMGN2MM	.500	.047	.250	.203				
DNMG-443 RM	DNMG-150612 RM	JEMGN3RM	.500	.047	.250	.203				
DNMG-444 RM	DNMG-150616 RM	JEMGN3RM	.500	.063	.250	.203				

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.



TURNING


SNMG 90° General Purpose

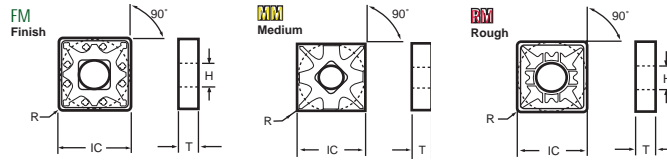

ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
SNMG-431 FM	SNMG-120404 FM	JNMGJ1FM	.500	.016	.187	.203				
SNMG-432 FM	SNMG-120408 FM	JNMGJ2FM	.500	.031	.187	.203	●	●		
SNMG-432 MM	SNMG-120408 MM	JNMGJ2MM	.500	.031	.187	.203	●	●		
SNMG-432 RM	SNMG-120408 RM	JNMGJ2RM	.500	.031	.187	.203	●	●		●
SNMG-433 RM	SNMG-120412 RM	JNMGJ3RM	.500	.047	.187	.203	●	●		●

Steel grades	Steel grades
Cast iron grades	Cast iron grades
Stainless/Exotic	Stainless/Exotic


TNMG 60° General Purpose

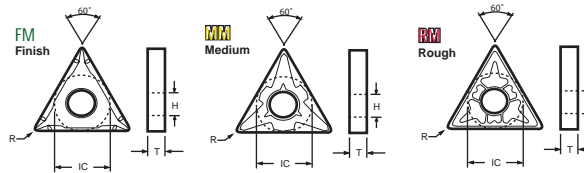

ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
TNMG-331 FM	TNMG-160404 MNS	JTMGH1MNS	.375	.016	.187	.150				
TNMG-331 MM	TNMG-160408 FNC	JTMGH2FNC	.375	.031	.187	.150	●			
TNMG-332 FM	TNMG-160408 FNS	JTMGH2FNS	.375	.031	.187	.150		●	●	
TNMG-332 MM	TNMG-160408 MNS	JTMGH2MNS	.375	.031	.187	.150				
TNMG-332 RM	TNMG-160408 RNS	JTMGH2RNS	.375	.031	.187	.150	●			
TNMG-333 MM	TNMG-160412 MNS	JTMGH3MNS	.375	.047	.187	.150				
TNMG-333 RM	TNMG-160412 RNS	JTMGH3RNS	.375	.047	.187	.150	●			

Steel grades	Steel grades
Cast iron grades	Cast iron grades
Stainless/Exotic	Stainless/Exotic


VNMG 35° General Purpose



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
VNMG-331 FM	VNMG-160404 FM	JXMGH1FM	.375	.016	.187	.150				
VNMG-331 MM	VNMG-160404 MM	JXMGH1MM	.375	.016	.187	.150	●			

Steel grades	Steel grades
Cast iron grades	Cast iron grades
Stainless/Exotic	Stainless/Exotic

WNMG 80° General Purpose

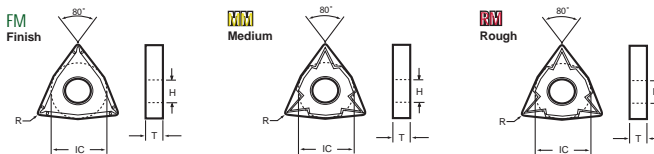

ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
WNMG-332 MM	WNMG-060408 MM	JZMAH2MM	.375	.031	.187	.150				
WNMG-431 FM	WNMG-080404 FM	JZMAJ1FM	.500	.016	.187	.203	●			
WNMG-431 MM	WNMG-080404 MM	JZMAJ1MM	.500	.016	.187	.203				
WNMG-432 FM	WNMG-080408 FM	JZMAJ2FM	.500	.031	.187	.203	●			
WNMG-432 MM	WNMG-080408 MM	JZMAJ2MM	.500	.031	.187	.203	●			
WNMG-432 RM	WNMG-080408 RM	JZMAJ2RM	.500	.031	.187	.203	●			
WNMG-433 MM	WNMG-080412 MM	JZMAJ3MM	.500	.047	.187	.203				
WNMG-433 RM	WNMG-080412 RM	JZMAJ2RM	.500	.047	.187	.203	●			


Steel grades	Steel grades
Cast iron grades	Cast iron grades
Stainless/Exotic	Stainless/Exotic

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

TURNING




CCMT 80° Screwdown



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
CCMT-21.51 FM	CCMT-060204 FM	JAMTD1FM	.250	.016	.094	.114				●
CCMT-32.51 FM	CCMT-09T304 FM	JAMTG1FM	.375	.016	.156	.177				●
CCMT-32.52 FM	CCMT-09T308 FM	JAMTG2FM	.375	.031	.156	.177				●
CCMT-431 FM	CCMT-120404 FM	JAMTJ1FM	.500	.016	.187	.203				●
CCMT-432 FM	CCMT-120408 FM	JAMTJ2FM	.500	.031	.187	.203				●

Steel grades	Steel grades	Cast iron grades	Stainless/Exotic
AGS50	AGS54	AS20	APS35


DCMT 55° Screwdown



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
DCMT-21.51 FM	DCMT-070204 FM	JDMTD1FM	.250	.016	.094	.114		●	●	
DCMT-21.52 FM	DCMT-070208 FM	JDMTD2FM	.250	.031	.094	.114		●	●	
DCMT-32.51 FM	DCMT-11T302 FM	JDMTG0FM	.375	.016	.156	.177		●	●	
DCMT-32.52 FM	DCMT-11T304 FM	JDMTG2FM	.375	.031	.156	.177		●	●	

Steel grades	Steel grades	Cast iron grades	Stainless/Exotic
AGS50	AGS54	AS20	APS35


SCMT 60° Screwdown



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
SCMT-32.51 GMR	TCMT-16T304 GMR	JQMTG1GMR	.375	.016	.156	.177	●			

Steel grades	Steel grades	Cast iron grades	Stainless/Exotic
AGS50	AGS54	AS20	APS35


TCMT 60° Screwdown



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
TCMT-21.51 FM	TCMT-110204 FM	JQMTD1FM	.250	.016	.094	.114	●		●	
TCMT-21.52 FM	TCMT-110208 FM	JQMTD2FM	.250	.031	.094	.114				
TCMT-32.51 FM	TCMT-16T304 FM	JQMTG1FM	.375	.016	.156	.177	●			
TCMT-32.52 FM	TCMT-16T308 FM	JQMTG2FM	.375	.031	.156	.177	●			

Steel grades	Steel grades	Cast iron grades	Stainless/Exotic
AGS50	AGS54	AS20	APS35

VCMT 35° Screwdown



ANSI Description	ISO Description	EDP Code	IC	R	T	H	AGS50	AGS54	AS20	APS35
VCMT-331 FM	VCMT-160404 FM	JWMT1FM	.375	.016	.187	.173	●	●		
VCMT-332 FM	VCMT-160408 FM	JWMT2FM	.375	.031	.187	.173	●	●		


Steel grades	Steel grades	Cast iron grades	Stainless/Exotic
AGS50	AGS54	AS20	APS35

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.



TURNING

MCFNL/R 10° Holder for 80° Diamond




RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MCFNR-164D	9T2521656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCFNL-164D	9T2501656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCFNR-165D	9T2521664D	CN_-54	1.000	1.000	6.000	1.380	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCFNL-165D	9T2501664D	CN_-54	1.000	1.000	6.000	1.380	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCFNR-205D	9T2522064D	CN_-54	1.250	1.250	6.000	1.380	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCFNL-205D	9T2502064D	CN_-54	1.250	1.250	6.000	1.380	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCFNR-166D	9T2521672D	CN_-64	1.000	1.000	6.000	1.500	1.250	ICSN-633	NL-68	CL-9	XNS-510	S-68	
MCFNL-166D	9T2501672D	CN_-64	1.000	1.000	6.000	1.500	1.250	ICSN-633	NL-68	CL-9	XNS-510	S-68	
MCFNR-206D	9T2522072D	CN_-64	1.250	1.250	6.000	1.500	1.500	ICSN-633	NL-68	CL-9	XNS-510	S-68	
MCFNL-206D	9T2502072D	CN_-64	1.250	1.250	6.000	1.500	1.500	ICSN-633	NL-68	CL-9	XNS-510	S-68	

MCGNL/R 10° Holder for 80° Diamond




RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MCGNR-164D	9T2581656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCGNL-164D	9T2561656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCGNR-165D	9T2581664D	CN_-54	1.000	1.000	6.000	1.380	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCGNL-165D	9T2561664D	CN_-54	1.000	1.000	6.000	1.380	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCGNR-205D	9T2582064D	CN_-54	1.250	1.250	6.000	1.380	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCGNL-205D	9T2562064D	CN_-54	1.250	1.250	6.000	1.380	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58	
MCGNR-166D	9T2581672D	CN_-64	1.000	1.000	6.000	1.500	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCGNL-166D	9T2561672D	CN_-64	1.000	1.000	6.000	1.500	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCGNR-206D	9T2582072D	CN_-64	1.250	1.250	6.000	1.500	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCGNL-206D	9T2562072D	CN_-64	1.250	1.250	6.000	1.500	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68	

MCKNL/R 15° Holder for 80° Diamond



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MCKNR-124B	9T2641256B	CN_-43	0.750	0.750	4.500	1.210	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNL-124B	9T2621256B	CN_-43	0.750	0.750	4.500	1.210	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNR-164D	9T2641656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNL-164D	9T2621656D	CN_-43	1.000	1.000	6.000	1.250	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNR-204D	9T2642056D	CN_-43	1.250	1.250	6.000	1.250	1.500	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNL-204D	9T2622056D	CN_-43	1.250	1.250	6.000	1.250	1.500	ICSN-433	NL-46	CL-20	XNS-48	S-46	
MCKNR-165D	9T2641664D	CN_-54	1.000	1.000	6.000	1.500	1.250	ICSN-533	NL-58	CL-9	XNS-58	S-58	
MCKNL-165D	9T2621664D	CN_-54	1.000	1.000	6.000	1.500	1.250	ICSN-533	NL-58	CL-9	XNS-58	S-58	
MCKNR-205D	9T2642064D	CN_-54	1.250	1.250	6.000	1.500	1.500	ICSN-533	NL-58	CL-9	XNS-58	S-58	
MCKNL-205D	9T2622064D	CN_-54	1.250	1.250	6.000	1.500	1.500	ICSN-533	NL-58	CL-9	XNS-58	S-58	
MCKNR-166D	9T2641672D	CN_-64	1.000	1.000	6.000	1.470	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCKNL-166D	9T2621672D	CN_-64	1.000	1.000	6.000	1.470	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCKNR-206D	9T2642072D	CN_-64	1.250	1.250	6.000	1.470	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCKNL-206D	9T2622072D	CN_-64	1.250	1.250	6.000	1.470	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCKNR-246E	9T2642472E	CN_-64	1.500	1.500	7.000	1.470	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68	
MCKNL-246E	9T2622472E	CN_-64	1.500	1.500	7.000	1.470	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68	

TURNING



MCLNL/R 5° Holder for 80° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)

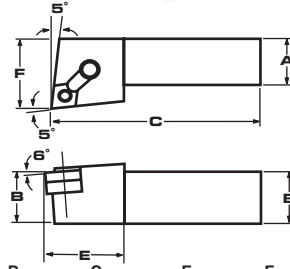


RH SHOWN

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MCLNR-104A	9T2801056A	CN_-43	0.625	0.625	4.000	1.200	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-104A	9T2781056A	CN_-43	0.625	0.625	4.000	1.200	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-124B	9T2801256B	CN_-43	0.750	0.750	4.500	1.200	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-124B	9T2781256B	CN_-43	0.750	0.750	4.500	1.200	1.000	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-164C	9T2801656C	CN_-43	1.000	1.000	5.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-164C	9T2781656C	CN_-43	1.000	1.000	5.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-164D	9T2801656D	CN_-43	1.000	1.000	6.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-164D	9T2781656D	CN_-43	1.000	1.000	6.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-204D	9T2802056D	CN_-43	1.250	1.250	6.000	1.200	1.500	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-204D	9T2782056D	CN_-43	1.250	1.250	6.000	1.200	1.500	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-854D	9T2804456D	CN_-43	1.000	1.250	6.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNL-854D	9T2784456D	CN_-43	1.000	1.250	6.000	1.200	1.250	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCLNR-165D	9T2801664D	CN_-54	1.000	1.000	6.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNL-165D	9T2781664D	CN_-54	1.000	1.000	6.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNR-205D	9T2802064D	CN_-54	1.250	1.250	6.000	1.370	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNL-205D	9T2782064D	CN_-54	1.250	1.250	6.000	1.370	1.500	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNR-855D	9T2804464D	CN_-54	1.000	1.250	6.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNL-855D	9T2784464D	CN_-54	1.000	1.250	6.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNR-865E	9T2804664E	CN_-54	1.000	1.500	7.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNL-865E	9T2784664E	CN_-54	1.000	1.500	7.000	1.370	1.250	ICSN-533	NL-58	CL-12	XNS-510	S-58
MCLNR-166D	9T2801672D	CN_-64	1.000	1.000	6.000	1.490	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNL-166D	9T2781672D	CN_-64	1.000	1.000	6.000	1.490	1.250	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNR-206D	9T2802072D	CN_-64	1.250	1.250	6.000	1.490	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNL-206D	9T2782072D	CN_-64	1.250	1.250	6.000	1.490	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNR-246E	9T2802472E	CN_-64	1.500	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNL-246E	9T2782472E	CN_-64	1.500	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNR-856D	9T2804472D	CN_-64	1.000	1.250	6.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNL-856D	9T2784472D	CN_-64	1.000	1.250	6.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNR-866E	9T2804672E	CN_-64	1.000	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCLNL-866E	9T2784672E	CN_-64	1.000	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68

MCMNN 50° Holder for 80° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)

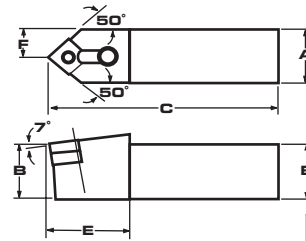


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MCMNN-164D	9T2821656D	CN_-43	1.000	1.000	6.000	1.390	0.500	ICSN-433	NL-46	CL-20	XNS-48	S-46
MCMNN-206E	9T2822072E	CN_-64	1.250	1.250	7.000	1.670	0.625	ICSN-633	NL-68	CL-12	XNS-510	S-68

MCRNL/R 15° Holder for 80° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)

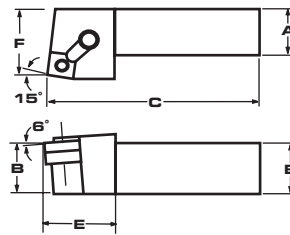

RH SHOWN


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MCRNR-124B	9T2521256B	CN_-43	0.750	0.750	4.500	1.240	0.750	ICSN-433	NL-46	CL-9	XNS-58	S-46
MCRNL-124B	9T2501256B	CN_-43	0.750	0.750	4.500	1.240	0.755	ICSN-433	NL-46	CL-9	XNS-58	S-46
MCRNR-164D	9T2521656D	CN_-43	1.000	1.000	6.000	1.240	1.250	ICSN-433	NL-46	CL-9	XNS-58	S-46
MCRNL-164D	9T2501656D	CN_-43	1.000	1.000	6.000	1.240	1.250	ICSN-433	NL-46	CL-9	XNS-58	S-46
MCRNR-165D	9T2521664D	CN_-54	1.000	1.000	6.000	1.340	1.250	ICSN-533	NL-58	CL-9	XNS-510	S-58
MCRNL-165D	9T2501664D	CN_-54	1.000	1.000	6.000	1.340	1.250	ICSN-533	NL-58	CL-9	XNS-510	S-58
MCRNR-205D	9T2522064D	CN_-54	1.250	1.250	6.000	1.340	1.500	ICSN-533	NL-58	CL-9	XNS-510	S-58
MCRNL-205D	9T2502064D	CN_-54	1.250	1.250	6.000	1.340	1.500	ICSN-533	NL-58	CL-9	XNS-510	S-58
MCRNR-206D	9T2522072D	CN_-64	1.250	1.250	6.000	1.490	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCRNL-206D	9T2502072D	CN_-64	1.250	1.250	6.000	1.490	1.500	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCRNR-246E	9T2522472E	CN_-64	1.500	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68
MCRNL-246E	9T2502472E	CN_-64	1.500	1.500	7.000	1.490	2.000	ICSN-633	NL-68	CL-12	XNS-510	S-68




TURNING

MDJNL/R 5° Holder for 55° Diamond

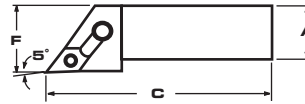

RH SHOWN


Most holders available with coolant port
(ie: Add CP to end of description)

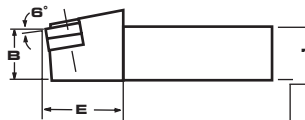


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MDJNR-124B	9T2921256B	DN_-43	0.750	0.750	4.500	1.380	1.000	IDSN-433	NL-46	TC-250	STC-11	S-46	
MDJNL-124B	9T2901256B	DN_-43	0.750	0.750	4.500	1.380	1.000	IDSN-433	NL-46	TC-250	STC-11	S-46	
MDJNR-164D	9T2921656D	DN_-43	1.000	1.000	6.000	1.240	1.250	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNL-164D	9T2901656D	DN_-43	1.000	1.000	6.000	1.240	1.250	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNR-204D	9T2922056D	DN_-43	1.250	1.250	6.000	1.240	1.500	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNL-204D	9T2902056D	DN_-43	1.250	1.250	6.000	1.240	1.500	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNR-854D	9T2924456D	DN_-43	1.000	1.250	6.000	1.240	1.250	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNL-854D	9T2904456D	DN_-43	1.000	1.250	6.000	1.240	1.250	IDSN-433	NL-46	CL-20	XNS-48	S-46	
MDJNR-165D	9T2921664D	DN_-54	1.000	1.000	6.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNL-165D	9T2901664D	DN_-54	1.000	1.000	6.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNR-205D	9T2922064D	DN_-54	1.250	1.250	6.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNL-205D	9T2902064D	DN_-54	1.250	1.250	6.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNR-855D	9T2924464D	DN_-54	1.000	1.250	6.000	1.470	1.500	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNL-855D	9T2904464D	DN_-54	1.000	1.250	6.000	1.470	1.500	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNR-865E	9T2924664E	DN_-54	1.000	1.500	7.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDJNL-865E	9T2904664E	DN_-54	1.000	1.500	7.000	1.470	1.250	IDSN-533	NL-58	CL-12	XNS-510	S-58	

MDPNN 27.5° Holder for 55° Diamond

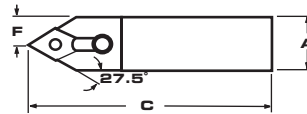


Most holders available with coolant port
(ie: Add CP to end of description)



PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MDPNN-164D	9T2961656D	DN_-43	1.000	1.000	6.000	1.630	0.519	IDSN-433	NL-46	CL-12	XNS-510	S-46	
MDPNN-204D	9T2962056D	RN_-43	1.250	1.250	6.000	1.630	0.750	IDSN-433	NL-46	CL-12	XNS-510	S-46	
MDPNN-165D	9T2961664D	DN_-54	1.000	1.000	6.000	1.920	0.528	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDPNN-205D	9T2962064D	DN_-54	1.250	1.250	6.000	1.920	0.653	IDSN-533	NL-58	CL-12	XNS-510	S-58	
MDPNN-855D	9T2964464D	DN_-54	1.000	1.250	6.000	1.920	0.528	IDSN-533	NL-58	CL-12	XNS-510	S-58	

MRGNL/R 15° Holder for Round Insert

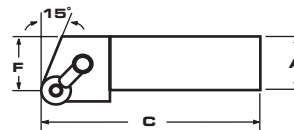

RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

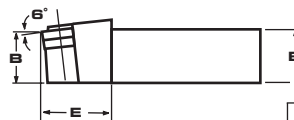


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MRGNR-164D	9T3141656D	RN_-43	1.000	1.000	6.000	1.250	1.250	IRSN-433	NL-46	CL-20	XNS-48	S-46	
MRGNL-164D	9T3121656D	RN_-43	1.000	1.000	6.000	1.250	1.250	IRSN-433	NL-46	CL-20	XNS-48	S-46	
MRGNR-165D	9T3141664D	RN_-54	1.000	1.000	6.000	1.380	1.250	IRSN-533	NL-58	CL-12	XNS-510	S-58	
MRGNL-165D	9T3121664D	RN_-54	1.000	1.000	6.000	1.380	1.250	IRSN-533	NL-58	CL-12	XNS-510	S-58	
MRGNR-205D	9T3142064D	RN_-54	1.250	1.250	6.000	1.380	1.500	IRSN-533	NL-58	CL-12	XNS-510	S-58	
MRGNL-205D	9T3122064D	RN_-54	1.250	1.250	6.000	1.380	1.500	IRSN-533	NL-58	CL-12	XNS-510	S-58	
MRGNR-166D	9T3141672D	RN_-64	1.000	1.000	6.000	1.500	1.250	IRSN-633	NL-68	CL-9	XNS-510	S-68	
MRGNL-166D	9T3121672D	RN_-64	1.000	1.000	6.000	1.500	1.250	IRSN-633	NL-68	CL-9	XNS-510	S-68	
MRGNR-206D	9T3142072D	RN_-64	1.250	1.250	6.000	1.500	1.500	IRSN-633	NL-68	CL-9	XNS-510	S-68	
MRGNL-206D	9T3122072D	RN_-64	1.250	1.250	6.000	1.500	1.500	IRSN-633	NL-68	CL-9	XNS-510	S-68	


TURNING



MSDNN 45° Holder for 90° Square

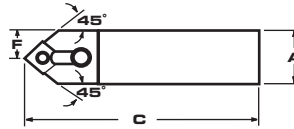

Most holders available with coolant port
(ie: Add CP to end of description)



PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp	Seat
								Seat	Pin	Clamp	Screw	Screw
MSDNN-103B	9T3301048B	SN_-32	0.625	0.625	4.500	1.140	0.312	ISSN-322	NL-34	CL-6	XNS-36	S-34
MSDNN-123B	9T3301248B	SN_-32	0.750	0.750	4.500	1.140	0.375	ISSN-322	NL-34	CL-6	XNS-36	S-34
MSDNN-124B	9T3301256B	SN_-43	0.750	0.750	4.500	1.340	0.375	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSDNN-164D	9T3301656D	SN_-43	1.000	1.000	6.000	1.340	0.500	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSDNN-165D	9T3301664D	SN_-54	1.000	1.000	6.000	1.610	0.500	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSDNN-205D	9T3302064D	SN_-54	1.250	1.250	6.000	1.610	0.625	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSDNN-855D	9T3304464D	SN_-54	1.000	1.250	6.000	1.610	0.500	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSDNN-206E	9T3302072E	SN_-64	1.250	1.250	7.000	1.620	0.625	ISSN-633	NL-68	CL-12	XNS-510	S-69
MSDNN-856D	9T3304472D	SN_-64	1.000	1.500	6.000	1.730	0.500	ISSN-633	NL-68	CL-12	XNS-510	S-69
MSDNN-248E	9T3302483E	SN_-86	1.500	1.500	7.000	2.240	0.750	ISSN-844	NL-810	CL-24	XNS-610	S-810
MSDNN-328K	9T3303283K	SN_-86	2.000	2.000	14.000	2.240	1.000	ISSN-844	NL-810	CL-24	XNS-610	S-810

MSKNL/R 15° Holder for 90° Square



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

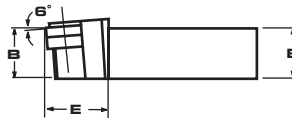


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp	Seat
								Seat	Pin	Clamp	Screw	Screw
MSKNR-123B	9T3361248B	SN_-32	0.750	0.750	4.500	1.210	1.000	ISSN-322	NL-34	CL-6	XNS-56	S-34
MSKNL-123B	9T3341248B	SN_-32	0.750	0.750	4.500	1.210	1.000	ISSN-322	NL-34	CL-6	XNS-56	S-34
MSKNR-124B	9T3361256B	SN_-43	0.750	0.750	4.500	1.210	1.000	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSKNL-124B	9T3341256B	SN_-43	0.750	0.750	4.500	1.210	1.000	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSKNR-164D	9T3361656D	SN_-43	1.000	1.000	6.000	1.250	1.250	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSKNL-164D	9T3341656D	SN_-43	1.000	1.000	6.000	1.250	1.250	ISSN-433	NL-46	CL-9	XNS-59	S-46
MSKNR-165D	9T3361664D	SN_-54	1.000	1.000	6.000	1.500	1.250	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSKNL-165D	9T3341664D	SN_-54	1.000	1.000	6.000	1.500	1.250	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSKNR-205D	9T3362064D	SN_-54	1.250	1.250	6.000	1.500	1.500	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSKNL-205D	9T3342064D	SN_-54	1.250	1.250	6.000	1.500	1.500	ISSN-533	NL-58	CL-12	XNS-510	S-58
MSKNR-206D	9T3362072D	SN_-64	1.250	1.250	6.000	1.470	1.500	ISSN-633	NL-68	CL-24	XNS-610	S-69
MSKNL-206D	9T3342072D	SN_-64	1.250	1.250	6.000	1.470	1.500	ISSN-633	NL-68	CL-24	XNS-610	S-69
MSKNR-246E	9T3362472E	SN_-64	1.500	1.500	7.000	1.470	2.000	ISSN-633	NL-68	CL-24	XNS-610	S-69
MSKNL-246E	9T3342472E	SN_-64	1.500	1.500	7.000	1.470	2.000	ISSN-633	NL-68	CL-24	XNS-610	S-69



TURNING

MSRNL/R 15° Holder for 90° Square




RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MSRNR-83B	9T3420848B	SN_-32	0.500	0.500	4.500	1.030	0.658	ISSN-322	NL-34	CL-6	XNS-36	S-46	
MSRNL-83B	9T3400848B	SN_-32	0.500	0.500	4.500	1.030	0.658	ISSN-322	NL-34	CL-6	XNS-36	S-46	
MSRNR-124B	9T3421256B	SN_-43	0.750	0.750	4.500	1.250	0.878	ISSN-433	NL-46	CL-9	XNS-59	S-46	
MSRNL-124B	9T3401256B	SN_-43	0.750	0.750	4.500	1.250	0.878	ISSN-433	NL-46	CL-9	XNS-59	S-46	
MSRNR-164D	9T3421656D	SN_-43	1.000	1.000	6.000	1.250	1.128	ISSN-433	NL-46	CL-9	XNS-59	S-46	
MSRNL-164D	9T3401656D	SN_-43	1.000	1.000	6.000	1.250	1.128	ISSN-433	NL-46	CL-9	XNS-59	S-46	
MSRNR-165D	9T3421664D	SN_-54	1.000	1.000	6.000	1.440	1.100	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNL-165D	9T3401664D	SN_-54	1.000	1.000	6.000	1.440	1.100	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNR-205D	9T3422064D	SN_-54	1.250	1.250	6.000	1.440	1.350	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNL-205D	9T3402064D	SN_-54	1.250	1.250	6.000	1.440	1.350	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNR-855D	9T3424464D	SN_-54	1.000	1.250	6.000	1.460	1.100	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNL-855D	9T3404464D	SN_-54	1.000	1.250	6.000	1.460	1.100	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSRNR-206D	9T3422072D	SN_-64	1.250	1.250	6.000	1.560	1.318	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNL-206D	9T3402072D	SN_-64	1.250	1.250	6.000	1.560	1.318	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNR-246E	9T3422472E	SN_-64	1.500	1.500	7.000	1.560	1.818	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNL-246E	9T3402472E	SN_-64	1.500	1.500	7.000	1.560	1.818	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNR-856D	9T3422472E	SN_-64	1.000	1.250	6.000	1.500	1.068	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNL-856D	9T3402472E	SN_-64	1.000	1.250	6.000	1.500	1.068	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSRNR-328K	9T3423283K	SN_-86	2.000	2.000	14.000	1.620	2.262	ISSN-844	NL-810	CL-24	XNS-610	S-810	
MSRNL-328K	9T3403283K	SN_-86	2.000	2.000	14.000	1.620	2.262	ISSN-844	NL-810	CL-24	XNS-610	S-810	

MSSNL/R 45° Holder for 90° Square



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MSSNR-83B	9T3480848B	SN_-32	0.500	0.500	4.500	1.030	0.658	ISSN-322	NL-34	CL-6	XNS-46	S-46	
MSSNL-83B	9T3460848B	SN_-32	0.500	0.500	4.500	1.030	0.658	ISSN-322	NL-34	CL-6	XNS-46	S-46	
MSSNR-124B	9T3481256B	SN_-43	0.750	0.750	4.500	1.240	0.662	ISSN-433	NL-46	CL-9	XNS-49	S-46	
MSSNL-124B	9T3461256B	SN_-43	0.750	0.750	4.500	1.240	0.662	ISSN-433	NL-46	CL-9	XNS-49	S-46	
MSSNR-164D	9T3481656D	SN_-43	1.000	1.000	6.000	1.240	0.912	ISSN-433	NL-46	CL-9	XNS-49	S-46	
MSSNL-164D	9T3461656D	SN_-43	1.000	1.000	6.000	1.240	0.912	ISSN-433	NL-46	CL-9	XNS-49	S-46	
MSSNR-165D	9T3481664D	SN_-54	1.000	1.000	6.000	1.370	0.912	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNL-165D	9T3461664D	SN_-54	1.000	1.000	6.000	1.370	0.912	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNR-205D	9T3482064D	SN_-54	1.250	1.250	6.000	1.370	1.500	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNL-205D	9T3462064D	SN_-54	1.250	1.250	6.000	1.370	1.500	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNR-855D	9T3484464D	SN_-54	1.000	1.250	6.000	1.370	1.250	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNL-855D	9T3464464D	SN_-54	1.000	1.250	6.000	1.370	1.250	ISSN-533	NL-58	CL-12	XNS-510	S-58	
MSSNR-206D	9T3482072D	SN_-64	1.250	1.250	6.000	1.490	1.500	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNL-206D	9T3462072D	SN_-64	1.250	1.250	6.000	1.490	1.500	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNR-246E	9T3482472E	SN_-64	1.500	1.500	7.000	1.490	2.000	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNL-246E	9T3462472E	SN_-64	1.500	1.500	7.000	1.490	2.000	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNR-856D	9T3482472E	SN_-64	1.000	1.250	6.000	1.490	2.000	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNL-856D	9T3462472E	SN_-64	1.000	1.250	6.000	1.490	2.000	ISSN-633	NL-68	CL-12	XNS-510	S-68	
MSSNR-328K	9T3483283K	SN_-86	2.000	2.000	14.000	1.620	2.262	ISSN-844	NL-810	CL-24	XNS-610	S-810	
MSSNL-328K	9T3463283K	SN_-86	2.000	2.000	14.000	1.620	2.262	ISSN-844	NL-810	CL-24	XNS-610	S-810	

TURNING




MTANL/R 5° Holder for 60° Triangle

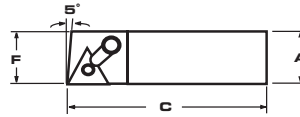

RH SHOWN


Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MTANR-123A	9T3541248B	TN_-32	0.750	0.750	4.000	1.060	0.750	ITSN-322	NL-34	CL-6	XNS-36	S-34
MTANL-123A	9T3521248B	TN_-32	0.750	0.750	4.000	1.060	0.750	ITSN-322	NL-34	CL-6	XNS-36	S-34
MTANR-164D	9T3541656D	TN_-43	1.000	1.000	6.000	1.220	1.000	ITSN-433	NL-46	CL-9	XNS-49	S-46
MTANL-164D	9T3521656D	TN_-43	1.000	1.000	6.000	1.220	1.000	ITSN-433	NL-46	CL-9	XNS-49	S-46

MTCNN 0° Holder for 60° Triangle



Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MTCNN-443F	9T3640949F	TN_-33	0.500	0.500	8.000	1.130	N/A	ITSN-323	NL-34L	CL-7	XNS-36	S-46
MTCNN-124D	9T3641256D	TN_-43	0.750	0.750	6.000	1.430	N/A	ITSN-433	NL-46	CL-12	XNS-59	S-46
MTCNN-644F	9T3641456F	TN_-43	0.750	0.750	8.000	1.430	N/A	ITSN-433	NL-46	CL-12	XNS-59	S-46

MTENNS 60° Holder for 60° Triangle




Most holders available with coolant port
(ie: Add CP to end of description)



PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MTENNS-103B	9T3681048B	TN_-33	0.625	0.625	4.500	1.160	0.312	ITSN-323	NL-34L	CL-6	XNS-36	N/A
MTENNS-123B	9T3681248B	TN_-33	0.750	0.750	4.500	1.160	0.375	ITSN-323	NL-34L	CL-6	XNS-36	N/A
MTENNS-853D	9T3684448D	TN_-33	1.000	1.250	6.000	1.160	0.500	ITSN-323	NL-34L	CL-6	XNS-36	N/A
MTENNS-104B	9T3681056B	TN_-43	0.625	0.625	4.500	1.140	0.312	ITSN-433	NL-46	CL-9	XNS-59	N/A
MTENNS-124B	9T3681256B	TN_-43	0.750	0.750	4.500	1.500	0.375	ITSN-433	NL-46	CL-9	XNS-59	N/A
MTENNS-164D	9T3681656B	TN_-43	1.000	1.000	6.000	1.500	0.500	ITSN-433	NL-46	CL-9	XNS-59	N/A
MTENNS-854D	9T3684456D	TN_-43	1.000	1.250	6.000	1.500	0.500	ITSN-433	NL-46	CL-9	XNS-59	N/A
MTENNS-864E	9T3684656E	TN_-43	1.000	1.500	7.000	1.500	0.500	ITSN-433	NL-46	CL-9	XNS-59	N/A
MTENNS-205D	9T3682064D	TN_-54	1.250	1.250	6.000	1.640	0.625	ITSN-533	NL-58	CL-9	XNS-510	N/A
MTENNS-246E	9T3682464E	TN_-64	1.500	1.500	7.000	1.950	0.750	ITSN-637	NL-68L	CL-12	XNS-510	N/A

MTFNL/R 90° Holder for 60° Triangle



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
MTFNR-123B	9T3741249B	TN_-33	0.750	0.750	4.500	0.940	1.000	ITSN-323	NL-34L	CL-6	XNS-36	S-46
MTFNL-123B	9T3721249B	TN_-33	0.750	0.750	4.500	0.940	1.000	ITSN-323	NL-34L	CL-6	XNS-36	S-46
MTFNR-163C	9T3741649C	TN_-33	1.000	1.000	5.000	0.940	1.250	ITSN-323	NL-34L	CL-6	XNS-36	S-46
MTFNL-163C	9T3721649C	TN_-33	1.000	1.000	5.000	0.940	1.250	ITSN-323	NL-34L	CL-6	XNS-36	S-46
MTFNR-164D	9T3741656D	TN_-43	1.000	1.000	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNL-164D	9T3721656D	TN_-43	1.000	1.000	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNR-204D	9T3742056D	TN_-43	1.250	1.250	6.000	1.220	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNL-204D	9T3722056D	TN_-43	1.250	1.250	6.000	1.220	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNR-854D	9T3744456D	TN_-43	1.000	1.250	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNL-854D	9T3724456D	TN_-43	1.000	1.250	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46
MTFNR-165D	9T3741664D	TN_-54	1.000	1.000	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNL-165D	9T3721664D	TN_-54	1.000	1.000	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNR-205D	9T3742064D	TN_-54	1.250	1.250	6.000	1.430	1.500	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNL-205D	9T3722064D	TN_-54	1.250	1.250	6.000	1.430	1.500	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNR-855D	9T3744464D	TN_-54	1.000	1.250	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNL-855D	9T3724464D	TN_-54	1.000	1.250	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58
MTFNR-246E	9T3742472E	TN_-66	1.500	1.500	7.000	1.490	1.250	ITSN-633	NL-68L	CL-12	XNS-510	S-68
MTFNL-246E	9T3722472E	TN_-66	1.500	1.500	7.000	1.490	2.000	ITSN-633	NL-68L	CL-12	XNS-510	S-68



TURNING

MTGNL/R 90° Holder for 60° Triangle




RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MTGNR-123B	9T3801249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	S-34	
MTGNL-123B	9T3781249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	S-34	
MTGNR-163C	9T3801649C	TN_-33	1.000	1.000	5.000	1.120	1.250	ITSN-323	NL-34L	CL-6	XNS-36	S-46	
MTGNL-163C	9T3781649C	TN_-33	1.000	1.000	5.000	1.120	1.250	ITSN-323	NL-34L	CL-6	XNS-36	S-46	
MTGNR-164D	9T3801656D	TN_-43	1.000	1.000	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNL-164D	9T3781656D	TN_-43	1.000	1.000	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNR-204D	9T3802056D	TN_-43	1.250	1.250	6.000	1.220	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNL-204D	9T3782056D	TN_-43	1.250	1.250	6.000	1.220	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNR-854D	9T3804456D	TN_-43	1.000	1.250	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNL-854D	9T3784456D	TN_-43	1.000	1.250	6.000	1.220	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTGNR-165D	9T3801664D	TN_-54	1.000	1.000	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNL-165D	9T3781664D	TN_-54	1.000	1.000	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNR-205D	9T3802064D	TN_-54	1.250	1.250	6.000	1.430	1.500	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNL-205D	9T3782064D	TN_-54	1.250	1.250	6.000	1.430	1.500	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNR-855D	9T3804464D	TN_-54	1.000	1.250	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNL-855D	9T3784464D	TN_-54	1.000	1.250	6.000	1.430	1.250	ITSN-533	NL-58	CL-12	XNS-510	S-58	
MTGNR-246E	9T3802472E	TN_-66	1.500	1.500	7.000	1.490	1.250	ITSN-633	NL-68L	CL-12	XNS-510	S-68	
MTGNL-246E	9T3782472E	TN_-66	1.500	1.500	7.000	1.490	2.000	ITSN-633	NL-68L	CL-12	XNS-510	S-68	

MTJNLS/R 3° Holder for 60° Triangle



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MTJNRS-123B	9T3861249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTJNLS-123B	9T3841249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTJNRS-164D	9T3861656D	TN_-43	1.000	1.000	6.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNLS-164D	9T3841656D	TN_-43	1.000	1.000	6.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNRS-204D	9T3862056D	TN_-43	1.250	1.250	6.000	1.190	1.500	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNLS-204D	9T3842056D	TN_-43	1.250	1.250	6.000	1.190	1.500	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNRS-854D	9T3864456D	TN_-43	1.000	1.250	6.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNLS-854D	9T3844456D	TN_-43	1.000	1.250	6.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNRS-864E	9T3864656E	TN_-43	1.000	1.500	7.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNLS-864E	9T3844656E	TN_-43	1.000	1.500	7.000	1.190	1.250	ITSN-433	NL-46	CL-9	XNS-510	N/A	
MTJNRS-205D	9T3862064D	TN_-54	1.250	1.250	6.000	1.440	1.500	ITSN-533	NL-58	CL-9	XNS-510	N/A	
MTJNLS-205D	9T3842064D	TN_-54	1.250	1.250	6.000	1.440	1.500	ITSN-533	NL-58	CL-9	XNS-510	N/A	
MTJNRS-865D	9T3864664D	TN_-54	1.000	1.500	6.000	1.440	1.250	ITSN-533	NL-58	CL-9	XNS-510	N/A	
MTJNLS-865D	9T3844664D	TN_-54	1.000	1.500	6.000	1.440	1.250	ITSN-533	NL-58	CL-9	XNS-510	N/A	
MTJNRS-246E	9T3862472E	TN_-66	1.500	1.500	7.000	1.670	2.000	ITSN-633	NL-68L	CL-12	XNS-510	N/A	
MTJNLS-246E	9T3842472E	TN_-66	1.500	1.500	7.000	1.670	2.000	ITSN-633	NL-68L	CL-12	XNS-510	N/A	

MTLNL/R 5° Holder for 60° Triangle



RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MTLNR-123B	9T3921249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTLNL-123B	9T3901249B	TN_-33	0.750	0.750	4.500	1.120	1.000	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTLNR-163D	9T3921649D	TN_-33	1.000	1.000	6.000	1.120	1.250	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTLNL-163D	9T3901649D	TN_-33	1.000	1.000	6.000	1.120	1.250	ITSN-323	NL-34L	CL-6	XNS-36	N/A	
MTLNR-164D	9T3921656D	TN_-43	1.000	1.000	6.000	1.240	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTLNL-164D	9T3901656D	TN_-43	1.000	1.000	6.000	1.240	1.250	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTLNR-204D	9T3922056D	TN_-43	1.250	1.250	6.000	1.280	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTLNL-204D	9T3902056D	TN_-43	1.250	1.250	6.000	1.280	1.500	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTLNR-205D	9T3922064D	TN_-54	1.250	1.250	6.000	1.400	1.500	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTLNL-205D	9T3902064D	TN_-54	1.250	1.250	6.000	1.400	1.500	ITSN-533	NL-58	CL-9	XNS-510	S-58	

TURNING



MTRNL/R 15° Holder for 60° Triangle

Most holders available with coolant port
(ie: Add CP to end of description)




RH SHOWN

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MTRNR-123B	9T3981249B	TN_-33	0.750	0.750	4.500	1.200	0.847	ITSN-323	NL-34L	CL-20	XNS-46	S-34	
MTRNL-123B	9T3961249B	TN_-33	0.750	0.750	4.500	1.200	0.847	ITSN-323	NL-34L	CL-20	XNS-46	S-34	
MTRNR-163D	9T3981649D	TN_-33	1.000	1.000	6.000	1.200	1.097	ITSN-323	NL-34L	CL-20	XNS-46	S-34	
MTRNL-163D	9T3961649D	TN_-33	1.000	1.000	6.000	1.200	1.097	ITSN-323	NL-34L	CL-20	XNS-46	S-34	
MTRNR-164D	9T3981656D	TN_-43	1.000	1.000	6.000	1.240	1.040	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTRNL-164D	9T3961656D	TN_-43	1.000	1.000	6.000	1.240	1.040	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTRNR-165D	9T3981664D	TN_-54	1.000	1.000	6.000	1.620	0.990	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTRNL-165D	9T3961664D	TN_-54	1.000	1.000	6.000	1.620	0.990	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTRNR-205D	9T3982064D	TN_-54	1.250	1.250	6.000	1.620	1.240	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTRNL-205D	9T3962064D	TN_-54	1.250	1.250	6.000	1.620	1.240	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTRNR-246E	9T3982072E	TN_-66	1.500	1.500	7.000	1.680	1.685	ITSN-633	NL-68L	CL-12	XNS-510	S-68	
MTRNL-246E	9T3962072E	TN_-66	1.500	1.500	7.000	1.680	1.685	ITSN-633	NL-68L	CL-12	XNS-510	S-68	

MTWNL/R 10° Holder for 60° Triangle

Most holders available with coolant port
(ie: Add CP to end of description)




RH SHOWN

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MTWNR-123D	9T4141249D	TN_-33	0.750	0.750	6.000	1.350	0.875	ITSN-323	NL-34L	CL-6	XNS-36	S-34	
MTWNL-123D	9T4101249D	TN_-33	0.750	0.750	6.000	1.350	0.875	ITSN-323	NL-34L	CL-6	XNS-36	S-34	
MTWNR-164E	9T4141656E	TN_-43	1.000	1.000	7.000	1.750	1.094	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTWNL-164E	9T4101656E	TN_-43	1.000	1.000	7.000	1.750	1.094	ITSN-433	NL-46	CL-9	XNS-510	S-46	
MTWNR-205F	9T4142064F	TN_-54	1.250	1.250	8.000	1.840	1.312	ITSN-533	NL-58	CL-9	XNS-510	S-58	
MTWNL-205F	9T4102064F	TN_-54	1.250	1.250	8.000	1.840	1.312	ITSN-533	NL-58	CL-9	XNS-510	S-58	

MVJNL/R 3° Holder for 35° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MVJNR-123B	9T4221248B	VN_-33	0.750	0.750	4.500	1.660	1.000	IVSN-324	NL-34L	CL-30	XNS-36	S-34	
MVJNL-123B	9T4181248B	VN_-33	0.750	0.750	4.500	1.660	1.000	IVSN-324	NL-34L	CL-30	XNS-36	S-34	
MVJNR-163C	9T4221648C	VN_-33	1.000	1.000	5.000	1.660	1.250	IVSN-324	NL-34L	CL-30	XNS-36	S-34	
MVJNL-163C	9T4181648C	VN_-33	1.000	1.000	5.000	1.660	1.250	IVSN-324	NL-34L	CL-30	XNS-36	S-34	
MVJNR-203D	9T4222048D	VN_-33	1.250	1.250	6.000	1.660	1.500	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVJNL-203D	9T4182048D	VN_-33	1.250	1.250	6.000	1.660	1.500	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVJNR-853D	9T4224448D	VN_-33	1.000	1.250	6.000	1.660	1.250	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVJNL-853D	9T4184448D	VN_-33	1.000	1.250	6.000	1.660	1.250	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVJNR-164D	9T4221656D	VN_-43	1.000	1.000	6.000	2.000	1.250	IVSN-433	NL-46	CL-30	XNS-510	S-46	
MVJNL-164D	9T4181656D	VN_-43	1.000	1.000	6.000	2.000	1.250	IVSN-433	NL-46	CL-30	XNS-510	S-46	
MVJNR-204D	9T4222056D	VN_-43	1.250	1.250	6.000	2.000	1.500	IVSN-433	NL-46	CL-30	XNS-510	S-46	
MVJNL-204D	9T4182056D	VN_-43	1.250	1.250	6.000	2.000	1.500	IVSN-433	NL-46	CL-30	XNS-510	S-46	
MVJNR-864E	9T4224656E	VN_-43	1.000	1.500	8.000	2.000	1.250	IVSN-433	NL-46	CL-30	XNS-510	S-46	
MVJNL-864E	9T4184656E	VN_-43	1.000	1.500	8.000	2.000	1.250	IVSN-433	NL-46	CL-30	XNS-510	S-46	



TURNING

MVLNL/R 5° Holder for 35° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MVLNR-164D	9T4281656D	VN_-43	1.000	1.000	6.000	1.500	1.750	IVSN-433	NL-46	CL-12	XNS-510	S-46	
MVLNL-164D	9T4261656D	VN_-43	1.000	1.000	6.000	1.500	1.750	IVSN-433	NL-46	CL-12	XNS-510	S-46	
MVLNR-204D	9T4282056D	VN_-43	1.250	1.250	6.000	1.500	2.000	IVSN-433	NL-46	CL-12	XNS-510	S-46	
MVLNL-204D	9T4262056D	VN_-43	1.250	1.250	6.000	1.500	2.000	IVSN-433	NL-46	CL-12	XNS-510	S-46	

MVNNL/R 27.5° Holder for 35° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MVNNR-123B	9T4341248B	VN_-33	0.750	0.750	4.500	0.940	1.000	IVSN-323	NL-34L	CL-6	XNS-36	S-34	
MVNNL-123B	9T4321248B	VN_-33	0.750	0.750	4.500	0.940	1.000	IVSN-323	NL-34L	CL-6	XNS-36	S-34	
MVNNR-163D	9T4341648D	VN_-33	1.000	1.000	6.000	1.220	1.250	IVSN-323	NL-34L	CL-6	XNS-36	S-34	
MVNNL-163D	9T4321648D	VN_-33	1.000	1.000	6.000	1.220	1.250	IVSN-323	NL-34L	CL-6	XNS-36	S-34	
MVNNR-203D	9T4342048D	VN_-33	1.250	1.250	6.000	1.220	1.500	IVSN-323	NL-34L	CL-6	XNS-36	S-34	
MVNNL-203D	9T4322048D	VN_-33	1.250	1.250	6.000	1.220	1.500	IVSN-323	NL-34L	CL-6	XNS-36	S-34	

MVTNL/R 27.5° Holder for 35° Diamond

Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MVTNR-123B	9T4461248B	VN_-33	0.750	0.750	4.500	1.710	1.000	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNL-123B	9T4441248B	VN_-33	0.750	0.750	4.500	1.710	1.000	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNR-163D	9T4461648D	VN_-33	1.000	1.000	6.000	1.710	1.250	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNL-163D	9T4441648D	VN_-33	1.000	1.000	6.000	1.710	1.250	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNR-203D	9T4462048D	VN_-33	1.250	1.250	6.000	1.710	1.500	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNL-203D	9T4442048D	VN_-33	1.250	1.250	6.000	1.710	1.500	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNR-243E	9T4462448E	VN_-33	1.500	1.500	7.000	1.710	1.750	IVSN-324	NL-34L	CL-30	XNS-510	S-34	
MVTNL-243E	9T4442448E	VN_-33	1.500	1.500	7.000	1.710	1.750	IVSN-324	NL-34L	CL-30	XNS-510	S-34	

MWLNL/R 5° Holder for 80° Trigon

Most holders available with coolant port
(ie: Add CP to end of description)




PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
MWLNR-123B	9T4561248B	WN_-33	0.750	0.750	4.500	1.200	1.000	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNL-123B	9T4541248B	WN_-33	0.750	0.750	4.500	1.200	1.000	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNR-163D	9T4561648D	WN_-33	1.000	1.000	6.000	1.200	1.250	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNL-163D	9T4541648D	WN_-33	1.000	1.000	6.000	1.200	1.250	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNR-203D	9T4562048D	WN_-33	1.250	1.250	6.000	1.200	1.500	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNL-203D	9T4542048D	WN_-33	1.250	1.250	6.000	1.200	1.500	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
MWLNR-124B	9T4561256B	WN_-43	0.750	0.750	4.500	1.200	1.000	IWSN-433	NL-46	CL-20	XNS-47	N/A	
MWLNL-124B	9T4541256B	WN_-43	0.750	0.750	4.500	1.200	1.000	IWSN-433	NL-46	CL-20	XNS-47	N/A	
MWLNR-164D	9T4561656D	WN_-43	1.000	1.000	6.000	1.200	1.250	IWSN-433	NL-46	CL-20	XNS-47	N/A	
MWLNL-164D	9T4541656D	WN_-43	1.000	1.000	6.000	1.200	1.250	IWSN-433	NL-46	CL-20	XNS-47	N/A	
MWLNR-204D	9T4562056D	WN_-43	1.250	1.250	6.000	1.200	1.500	IWSN-433	NL-46	CL-20	XNS-47	N/A	
MWLNL-204D	9T4542056D	WN_-43	1.250	1.250	6.000	1.200	1.500	IWSN-433	NL-46	CL-20	XNS-47	N/A	


TURNING



RAL/R 45° Holder for Round Insert



RH SHOWN




Most holders available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
RAR-164	9T5121656	RN_-43	1.000	1.000	6.000	0.690	1.000	IRSN-43	CLP-38	N/A
RAL-164	9T5111656	RN_-43	1.000	1.000	6.000	0.690	1.000	IRSN-43	CLP-38	N/A
RAR-854	9T5124456	RN_-43	1.000	1.250	6.000	0.690	1.000	IRSN-43	CLP-310	N/A
RAL-854	9T5114456	RN_-43	1.000	1.250	6.000	0.690	1.000	IRSN-43	CLP-310	N/A
RAR-864	9T5124656	RN_-43	1.000	1.500	7.000	0.690	1.000	IRSN-43	CLP-312	N/A
RAL-864	9T5114656	RN_-43	1.000	1.500	7.000	0.690	1.000	IRSN-43	CLP-312	N/A
RAR-166	9T5121672	RN_-64	1.000	1.000	6.000	0.950	1.000	IRSN-63	CLP-58	N/A
RAL-166	9T5111672	RN_-64	1.000	1.000	6.000	0.950	1.000	IRSN-63	CLP-58	N/A
RAR-856	9T5124472	RN_-64	1.000	1.250	6.000	0.950	1.000	IRSN-63	CLP-510	N/A
RAL-856	9T5114472	RN_-64	1.000	1.250	6.000	0.950	1.000	IRSN-63	CLP-510	N/A
RAR-248	9T5122483	RN_-86	1.500	1.500	7.000	1.200	1.500	IRSN-84	CLP-612	N/A
RAL-248	9T5112483	RN_-86	1.500	1.500	7.000	1.200	1.500	IRSN-84	CLP-612	N/A

SBL/R 15° Holder for 90° Square



RH SHOWN




Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
SBR-124	9T5171256	SN_-43	0.750	0.750	4.500	0.870	0.630	ISSN-432	CLP-36	N/A
SBL-124	9T5161256	SN_-43	0.750	0.750	4.500	0.870	0.630	ISSN-432	CLP-36	N/A
SBR-164	9T5171656	SN_-43	1.000	1.000	6.000	0.870	0.780	ISSN-432	CLP-38	N/A
SBL-164	9T5161656	SN_-43	1.000	1.000	6.000	0.870	0.780	ISSN-432	CLP-38	N/A
SBR-206	9T5172072	SN_-64	1.250	1.250	7.000	1.250	1.030	ISSN-632	CLP-510	N/A
SBL-206	9T5162072	SN_-64	1.250	1.250	7.000	1.250	1.030	ISSN-632	CLP-510	N/A

TAL/R 30° Holder for 60° Triangle



RH SHOWN



Most holders available with coolant port
(ie: Add CP to end of description)

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
TAR-103	9T8521048	TN_-32	0.625	0.625	4.500	0.780	0.640	ITSN-324	CLP-25	N/A
TAL-103	9T8501048	TN_-32	0.625	0.625	4.500	0.780	0.640	ITSN-324	CLP-25	N/A
TAR-123	9T8521248	TN_-32	0.750	0.750	4.500	0.780	0.770	ITSN-324	CLP-25	N/A
TAL-123	9T8501248	TN_-32	0.750	0.750	4.500	0.780	0.770	ITSN-324	CLP-25	N/A
TAR-164	9T8521656	TN_-43	1.000	1.000	6.000	1.000	1.030	ITSN-435	CLP-38	N/A
TAL-164	9T8501656	TN_-43	1.000	1.000	6.000	1.000	1.030	ITSN-435	CLP-38	N/A
TAR-854	9T8524456	TN_-43	1.000	1.250	6.000	1.000	1.030	ITSN-435	CLP-310	N/A
TAL-854	9T8504456	TN_-43	1.000	1.250	6.000	1.000	1.030	ITSN-435	CLP-310	N/A
TAR-165	9T8521664	TN_-54	1.000	1.000	6.000	1.190	1.030	ITSN-535	CLP-48	N/A
TAL-165	9T8501664	TN_-54	1.000	1.000	6.000	1.190	1.030	ITSN-535	CLP-48	N/A
TAR-205	9T8522064	TN_-54	1.250	1.250	7.000	1.190	1.280	ITSN-535	CLP-410	N/A
TAL-205	9T8502064	TN_-54	1.250	1.250	7.000	1.190	1.280	ITSN-535	CLP-410	N/A
TAR-855	9T8524464	TN_-54	1.000	1.250	6.000	1.190	1.030	ITSN-535	CLP-410	N/A
TAL-855	9T8504464	TN_-54	1.000	1.250	6.000	1.190	1.030	ITSN-535	CLP-410	N/A



TURNING

TE 30° Holder for 60° Triangle

Most holders available with coolant port
(ie: Add CP to end of description)

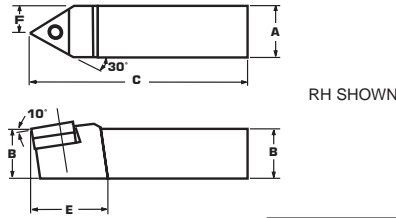


RH SHOWN

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
TE-103	9T8621048	TN_-32	0.625	0.625	4.500	0.730	0.375	ITSN-324	CLP-25	N/A
TE-124	9T8621248	TN_-43	0.750	0.750	4.500	1.020	0.375	ITSN-434	CLP-36	N/A
TE-164	9T8621656	TN_-43	1.000	1.000	6.000	1.020	0.500	ITSN-434	CLP-38	N/A
TE-205	9T8622064	TN_-54	1.250	1.250	7.000	1.150	0.625	ITSN-534	CLP-410	N/A
TE-246	9T8622476	TN_-66	1.500	1.500	8.000	1.340	0.750	ITSN-637	CLP-512T	N/A

TFL/R 30° Holder for 60° Triangle

Most holders available with coolant port
(ie: Add CP to end of description)

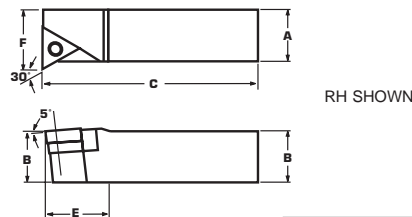


RH SHOWN

PARTS

Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
TFR-164	9T8681656	TN_-43	1.000	1.000	6.000	1.000	1.240	ITSN-434	CLP-38	N/A
TFL-164	9T8661656	TN_-43	1.000	1.000	6.000	1.000	1.240	ITSN-434	CLP-38	N/A
TFR-205	9T8682064	TN_-54	1.250	1.250	7.000	1.190	1.470	ITSN-534	CLP-410	N/A
TFL-205	9T8662064	TN_-54	1.250	1.250	7.000	1.190	1.470	ITSN-534	CLP-410	N/A
TFR-245	9T8682464	TN_-54	1.500	1.500	7.000	1.190	1.720	ITSN-537	CLP-412T	N/A
TFL-245	9T8662464	TN_-54	1.500	1.500	7.000	1.190	1.720	ITSN-537	CLP-412T	N/A
TFR-246	9T8682476	TN_-66	1.500	1.500	7.000	N/A	1.730	ITSN-637	CLP-512T	N/A
TFL-246	9T8662476	TN_-66	1.500	1.500	7.000	N/A	1.730	ITSN-637	CLP-512T	N/A

TGL/R 30° Holder for 60° Triangle

Most holders available with coolant port
(ie: Add CP to end of description)

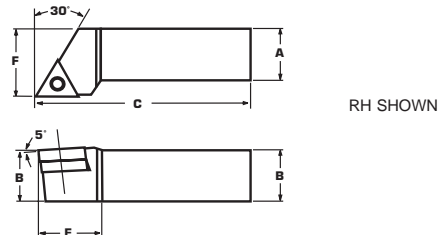


RH SHOWN

PARTS


Description	EDP Code	Insert	A	B	C	E	F	Lock		Seat
								Seat	Pin	Screw
TGR-123	9T8741248	TN_-32	0.750	0.750	4.500	0.900	1.020	ITSN-324	CLP-25	N/A
TGL-123	9T8721248	TN_-32	0.750	0.750	4.500	0.900	1.020	ITSN-324	CLP-25	N/A
TGR-164	9T8741656	TN_-43	1.000	1.000	6.000	1.140	1.280	ITSN-435	CLP-38	N/A
TGL-164	9T8721656	TN_-43	1.000	1.000	6.000	1.140	1.280	ITSN-435	CLP-38	N/A
TGR-854	9T8744456	TN_-43	1.000	1.250	6.000	1.140	1.280	ITSN-435	CLP-310	N/A
TGL-854	9T8724456	TN_-43	1.000	1.250	6.000	1.140	1.280	ITSN-435	CLP-310	N/A
TGR-165	9T8741664	TN_-54	1.000	1.000	6.000	1.310	1.280	ITSN-535	CLP-48	N/A
TGL-165	9T8721664	TN_-54	1.000	1.000	6.000	1.310	1.280	ITSN-535	CLP-48	N/A
TGR-205	9T8742064	TN_-54	1.250	1.250	7.000	1.310	1.530	ITSN-535	CLP-410	N/A
TGL-205	9T8722064	TN_-54	1.250	1.250	7.000	1.310	1.530	ITSN-535	CLP-410	N/A
TGR-245	9T8742464	TN_-54	1.500	1.500	7.000	1.310	1.780	ITSN-535	CLP-412	N/A
TGL-245	9T8722464	TN_-54	1.500	1.500	7.000	1.310	1.780	ITSN-535	CLP-412	N/A
TGR-246	9T8742476	TN_-66	1.500	1.500	7.000	1.480	1.790	ITSN-637	CLP-512T	N/A
TGL-246	9T8722476	TN_-66	1.500	1.500	7.000	1.480	1.790	ITSN-637	CLP-512T	N/A



SI-MCLNL/R 5° Bar for 80° Diamond

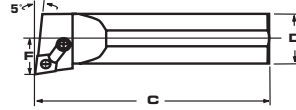

RH SHOWN




Most bars available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	Seat
SI-MCLNR-164	9T6761656	CN_-43	1.280	12.000	1.000	0.640	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MCLNL-164	9T6741656	CN_-43	1.280	12.000	1.000	0.640	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MCLNR-204	9T6762056	CN_-43	1.530	14.000	1.250	0.765	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MCLNL-204	9T6742056	CN_-43	1.530	14.000	1.250	0.765	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MCLNR-244	9T6762456	CN_-43	1.780	14.000	1.500	0.890	14°	ICSN-432	NL-46	CL-20	XNS-47	S-46	
SI-MCLNL-244	9T6742456	CN_-43	1.780	14.000	1.500	0.890	14°	ICSN-432	NL-46	CL-20	XNS-47	S-46	
SI-MCLNR-284	9T6762856	CN_-43	2.030	14.000	1.750	1.015	12°	ICSN-432	NL-46	CL-20	XNS-47	S-46	
SI-MCLNL-284	9T6742856	CN_-43	2.030	14.000	1.750	1.015	12°	ICSN-432	NL-46	CL-20	XNS-47	S-46	
SI-MCLNR-325	9T6763264	CN_-54	2.562	16.000	2.000	1.281	12°	ICSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MCLNL-325	9T6743264	CN_-54	2.562	16.000	2.000	1.281	12°	ICSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MCLNR-326	9T6763272	CN_-64	2.562	16.000	2.000	1.281	12°	ICSN-633	NL-68	CL-12	XNS-510	S-68	
SI-MCLNL-326	9T6743272	CN_-64	2.562	16.000	2.000	1.281	12°	ICSN-633	NL-68	CL-12	XNS-510	S-68	
SI-MCLNR-406	9T6764072	CN_-64	3.062	16.000	2.500	1.531	10°	ICSN-633	NL-68	CL-12	XNS-510	S-68	
SI-MCLNL-406	9T6744072	CN_-64	3.062	16.000	2.500	1.531	10°	ICSN-633	NL-68	CL-12	XNS-510	S-68	

SI-MDJNL/R 3° Bar for 55° Diamond



RH SHOWN




Most bars available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	Seat
SI-MDJNR-204	9T6822056	DN_-43	2.000	14.000	1.250	1.000	10°	IDSN-433	NL-46	CL-20	XNS-59	S-46	
SI-MDJNL-204	9T6802056	DN_-43	2.000	14.000	1.250	1.000	10°	IDSN-433	NL-46	CL-20	XNS-59	S-46	
SI-MDJNR-244	9T6822456	DN_-43	2.250	14.000	1.500	1.125	10°	IDSN-433	NL-46	CL-12	XNS-59	S-46	
SI-MDJNL-244	9T6802456	DN_-43	2.250	14.000	1.500	1.125	10°	IDSN-433	NL-46	CL-12	XNS-59	S-46	
SI-MDJNR-324	9T6823256	DN_-43	3.000	16.000	2.000	1.500	10°	IDSN-433	NL-46	CL-12	XNS-59	S-46	
SI-MDJNL-324	9T6803256	DN_-43	3.000	16.000	2.000	1.500	10°	IDSN-433	NL-46	CL-12	XNS-59	S-46	
SI-MDJNR-325	9T6823264	DN_-54	3.000	16.000	2.000	1.500	10°	IDSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MDJNL-325	9T6803264	DN_-54	3.000	16.000	2.000	1.500	10°	IDSN-533	NL-58	CL-12	XNS-510	S-58	

SI-MSKNL/R 15° Bar for 90° Square



RH SHOWN



Most bars available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	Seat
SI-MSKNR-204	9T7002056	SN_-43	1.530	14.000	1.250	0.765	12°	N/A	NL-44	CL-9	XNS-59	N/A	
SI-MSKNL-204	9T6982056	SN_-43	1.530	14.000	1.250	0.765	12°	N/A	NL-44	CL-9	XNS-59	N/A	
SI-MSKNR-244	9T7002456	SN_-43	1.780	14.000	1.500	0.890	12°	ISSN-433	NL-46	CL-9	XNS-59	S-46	
SI-MSKNL-244	9T6982456	SN_-43	1.780	14.000	1.500	0.890	12°	ISSN-433	NL-46	CL-9	XNS-59	S-46	
SI-MSKNR-284	9T7002856	SN_-43	2.030	14.000	1.750	1.015	12°	ISSN-433	NL-46	CL-9	XNS-59	S-46	
SI-MSKNL-284	9T6982856	SN_-43	2.030	14.000	1.750	1.015	12°	ISSN-433	NL-46	CL-9	XNS-59	S-46	
SI-MSKNR-325	9T7003264	SN_-54	2.562	16.000	2.000	1.281	12°	ISSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MSKNL-325	9T6983264	SN_-54	2.562	16.000	2.000	1.281	12°	ISSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MSKNR-405	9T7004064	SN_-54	3.062	16.000	2.500	1.531	10°	ISSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MSKNL-405	9T6984064	SN_-54	3.062	16.000	2.500	1.531	10°	ISSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MSKNR-485	9T7004864	SN_-54	3.562	22.000	3.000	1.781	10°	ISSN-533	NL-58	CL-12	XNS-510	S-58	
SI-MSKNL-485	9T6984864	SN_-54	3.562	22.000	3.000	1.781	10°	ISSN-533	NL-58	CL-12	XNS-510	S-58	



TURNING

SI-MTFNL/R 90° Bar for 60° Triangle




RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
SI-MTFNR-163	9T7061649	TN_-33	1.280	12.000	1.000	0.640	12°	N/A	NL-33L	CL-9	XNS-59	N/A
SI-MTFNL-163	9T7041649	TN_-33	1.280	12.000	1.000	0.640	12°	N/A	NL-33L	CL-9	XNS-59	N/A
SI-MTFNR-203	9T7062049	TN_-33	1.530	14.000	1.250	0.765	12°	N/A	NL-33L	CL-9	XNS-59	N/A
SI-MTFNL-203	9T7042049	TN_-33	1.530	14.000	1.250	0.765	12°	N/A	NL-33L	CL-9	XNS-59	N/A
SI-MTFNR-244	9T7062456	TN_-43	2.062	14.000	1.500	1.031	10°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNL-244	9T7042456	TN_-43	2.062	14.000	1.500	1.031	10°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNR-284	9T7062856	TN_-43	2.312	14.000	1.750	1.156	10°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNL-284	9T7042856	TN_-43	2.312	14.000	1.750	1.156	10°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNR-324	9T7063256	TN_-43	2.562	16.000	2.000	1.281	8°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNL-324	9T7043256	TN_-43	2.562	16.000	2.000	1.281	8°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNR-404	9T7064056	TN_-43	3.062	16.000	2.500	1.531	8°	ITSN-433	NL-46	CL-9	XNS-59	S-46
SI-MTFNL-404	9T7044056	TN_-43	3.062	16.000	2.500	1.531	8°	ITSN-433	NL-46	CL-9	XNS-59	S-46

SI-MVJNL/R 3° Bar for 35° Diamond




RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
SI-MVJNR-203	9T7122049	VN_-33	2.250	14.000	1.250	1.125	12°	IVSN-324	NL-34L	CL-30	XNS-510	S-34
SI-MVJNL-203	9T7102049	VN_-33	2.250	14.000	1.250	1.125	12°	IVSN-324	NL-34L	CL-30	XNS-510	S-34
SI-MVJNR-243	9T7122449	VN_-33	2.500	14.000	1.500	1.250	12°	IVSN-324	NL-34L	CL-30	XNS-510	S-34
SI-MVJNL-243	9T7102449	VN_-33	2.500	14.000	1.500	1.250	12°	IVSN-324	NL-34L	CL-30	XNS-510	S-34
SI-MVJNR-284	9T7122856	VN_-43	3.000	14.000	1.750	1.500	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVJNL-284	9T7102856	VN_-43	3.000	14.000	1.750	1.500	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVJNR-324	9T7123256	VN_-43	3.250	16.000	2.000	1.625	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVJNL-324	9T7103256	VN_-43	3.250	16.000	2.000	1.625	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVJNR-404	9T7124056	VN_-43	3.750	16.000	2.500	1.875	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVJNL-404	9T7104056	VN_-43	3.750	16.000	2.500	1.875	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46

SI-MVLNL/R 5° Bar for 35° Diamond



RH SHOWN


Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock		Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw
SI-MVLNR-243	9T7162449	VN_-33	2.250	14.000	1.500	1.250	12°	IVSN-324	NL-34L	CL-20	XNS-47	S-34
SI-MVLNL-243	9T7142449	VN_-33	2.250	14.000	1.500	1.250	12°	IVSN-324	NL-34L	CL-20	XNS-47	S-34
SI-MVLNR-283	9T7162849	VN_-33	2.500	14.000	1.750	1.375	12°	IVSN-324	NL-34L	CL-12	XNS-47	S-34
SI-MVLNL-283	9T7142849	VN_-33	2.500	14.000	1.750	1.250	12°	IVSN-324	NL-34L	CL-12	XNS-47	S-34
SI-MVLNR-324	9T7163256	VN_-43	3.000	16.000	2.000	1.375	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVLNL-324	9T7143256	VN_-43	3.000	16.000	2.000	1.500	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVLNR-364	9T7163656	VN_-43	3.250	16.000	2.250	1.500	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46
SI-MVLNL-364	9T7143656	VN_-43	3.250	16.000	2.250	1.500	12°	IVSN-433	NL-46	CL-12	XNS-510	S-46



SI-MVPNL/R 27.5° Bar for 35° Diamond

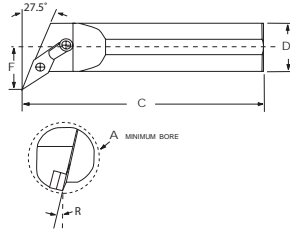


RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
SI-MVPNR-203	9T7222049	VN_-33	1.750	14.000	1.250	0.875	12°	IVSN-324	NL-34L	CL-30	XNS-58	S-34	
SI-MVPNL-203	9T7202049	VN_-33	1.750	14.000	1.250	0.875	12°	IVSN-324	NL-34L	CL-30	XNS-58	S-34	
SI-MVPNR-323	9T7223249	VN_-33	2.500	16.000	2.000	1.250	12°	IVSN-324	NL-34L	CL-30	XNS-58	S-34	
SI-MVPNL-323	9T7203249	VN_-33	2.500	16.000	2.000	1.250	12°	IVSN-324	NL-34L	CL-30	XNS-58	S-34	

SI-MWLNL/R 5° Bar for 80° Trigon

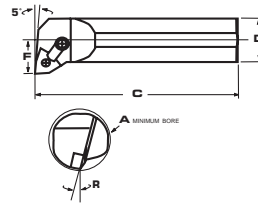


RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Lock			Clamp		Seat
								Seat	Pin	Clamp	Screw	Screw	
SI-MWLNR-123	9T7301249	WN_-33	0.930	10.000	0.750	0.500	14°	N/A	NL-33L	CL-6	XNS-36	N/A	
SI-MWLNL-123	9T7281249	WN_-33	0.930	10.000	0.750	0.500	14°	N/A	NL-33L	CL-6	XNS-36	N/A	
SI-MWLNR-163	9T7301649	WN_-33	1.200	12.000	1.000	0.640	14°	N/A	NL-33L	CL-6	XNS-36	N/A	
SI-MWLNL-163	9T7281649	WN_-33	1.200	12.000	1.000	0.640	14°	N/A	NL-33L	CL-6	XNS-36	N/A	
SI-MWLNR-203	9T7302049	WN_-33	1.470	14.000	1.250	0.765	14°	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
SI-MWLNL-203	9T7282049	WN_-33	1.470	14.000	1.250	0.765	14°	IWSN-323	NL-34L	CL-6	XNS-36	N/A	
SI-MWLNR-164	9T7301656	WN_-43	1.280	12.000	1.000	0.640	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MWLNL-164	9T7281656	WN_-43	1.280	12.000	1.000	0.640	14°	N/A	NL-44	CL-20	XNS-47	N/A	
SI-MWLNR-204	9T7302056	WN_-43	1.530	14.000	1.250	0.765	14°	IWSN-433	NL-46	CL-20	XNS-47	N/A	
SI-MWLNL-204	9T7282056	WN_-43	1.530	14.000	1.250	0.765	14°	IWSN-433	NL-46	CL-20	XNS-47	N/A	

S_-SCFCL/R 90° Bar for 80° Diamond



RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	A	C	D	F	R	Insert
								Screw
S06-SCFCR-2	9T5220640	CC_-21.5	0.510	6.000	0.375	0.250	11°	C02506
S06-SCFCL-2	9T5230640	CC_-21.5	0.510	6.000	0.375	0.250	11°	C02506
S08-SCFCR-3	9T5220848	CC_-32.5	0.625	8.000	0.500	0.313	9°	C04008
S08-SCFCL-3	9T5230848	CC_-32.5	0.625	8.000	0.500	0.313	9°	C04008



TURNING

S₋-SCLCL/R 5° Bar for 80° Diamond




RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Insert Screw
S06-SCLCR-2	9T5320640	CC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S06-SCLCL-2	9T5300640	CC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S08-SCLCR-2	9T5320840	CC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S08-SCLCL-2	9T5300840	CC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S10-SCLCR-2	9T5321040	CC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S10-SCLCL-2	9T5301040	CC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S06-SCLCR-3	9T5320648	CC_-32.5	0.500	6.000	0.375	0.250	11°	C04008
S06-SCLCL-3	9T5300648	CC_-32.5	0.500	6.000	0.375	0.250	11°	C04008
S08-SCLCR-3	9T5320848	CC_-32.5	0.625	8.000	0.500	0.313	9°	C04008
S08-SCLCL-3	9T5300848	CC_-32.5	0.625	8.000	0.500	0.313	9°	C04008
S10-SCLCR-3	9T5321048	CC_-32.5	0.812	10.000	0.625	0.406	7°	C04008
S10-SCLCL-3	9T5301048	CC_-32.5	0.812	10.000	0.625	0.406	7°	C04008
S12-SCLCR-3	9T5321248	CC_-32.5	1.000	10.000	0.750	0.500	10°	C04008
S12-SCLCL-3	9T5301248	CC_-32.5	1.000	10.000	0.750	0.500	10°	C04008
S16-SCLCR-3	9T5321648	CC_-32.5	1.250	12.000	1.000	0.625	5°	C04008
S16-SCLCL-3	9T5301648	CC_-32.5	1.250	12.000	1.000	0.625	5°	C04008

S₋-SDUCL/R 3° Bar for 55° Diamond




RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Insert Screw
S08-SDUCR-2	9T5350840	DC_-21.5	0.780	8.000	0.500	0.437	11°	C02506
S08-SDUCL-2	9T5340840	DC_-21.5	0.780	8.000	0.500	0.437	11°	C02506
S10-SDUCR-2	9T5351040	DC_-21.5	0.840	10.000	0.625	0.500	5°	C02506
S10-SDUCL-2	9T5341040	DC_-21.5	0.840	10.000	0.625	0.500	5°	C02506
S12-SDUCR-3	9T5351248	DC_-32.5	1.125	10.000	0.750	0.562	6°	C04008
S12-SDUCL-3	9T5341248	DC_-32.5	1.125	10.000	0.750	0.562	6°	C04008
S16-SDUCR-3	9T5351648	DC_-32.5	1.500	12.000	1.000	0.750	4°	C04008
S16-SDUCL-3	9T5341648	DC_-32.5	1.500	12.000	1.000	0.750	4°	C04008

S₋-STFCL/R 90° Bar for 60° Triangle



RH SHOWN

Most bars available with coolant port
(ie: Add CP to end of description)

PARTS


Description	EDP Code	Insert	A	C	D	F	R	Insert Screw
S06-STFCR-2	9T5400640	TC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S06-STFCL-2	9T5390640	TC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S08-STFCR-2	9T5400840	TC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S08-STFCL-2	9T5390840	TC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S10-STFCR-2	9T5401040	TC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S10-STFCL-2	9T5391040	TC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S12-STFCR-2	9T5401240	TC_-21.5	1.000	10.000	0.750	0.500	6°	C02506
S12-STFCL-2	9T5391240	TC_-21.5	1.000	10.000	0.750	0.500	6°	C02506

TURNING



S₋STUCL/R 3° Bar for 60° Triangle

Most bars available with coolant port
(ie: Add CP to end of description)




RH SHOWN

PARTS

Description	EDP Code	Insert	A	C	D	F	R	Insert Screw
S06-STUCR-2	9T5430640	TC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S06-STUCL-2	9T5420640	TC_-21.5	0.500	6.000	0.375	0.250	11°	C02506
S08-STUCR-2	9T5430840	TC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S08-STUCL-2	9T5420840	TC_-21.5	0.625	8.000	0.500	0.313	9°	C02506
S10-STUCR-2	9T5431040	TC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S10-STUCL-2	9T5421040	TC_-21.5	0.812	10.000	0.625	0.406	7°	C02506
S12-STUCR-3	9T5431248	TC_-32.5	1.000	10.000	0.750	0.500	6°	C04008
S12-STUCL-3	9T5421248	TC_-32.5	1.000	10.000	0.750	0.500	6°	C04008
S16-STUCR-3	9T5431648	TC_-32.5	1.280	12.000	1.000	0.640	4°	C04008
S16-STUCL-3	9T5421648	TC_-32.5	1.280	12.000	1.000	0.640	4°	C04008


S-4400W Steel Shank with Through Coolant

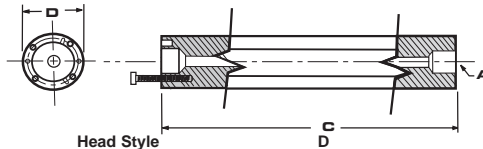

PARTS

Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-4416W	9IBS4416W	H16-	1.000	9.000	1/4 - 18NPT	SS61
S-4420W	9IBS4420W	H20-	1.250	9.000	3/8 - 18NPT	SS81
S-4424W	9IBS4424W	H24-	1.500	10.000	3/8 - 18NPT	SS85
S-4428W	9IBS4428W	H28-	1.750	12.000	3/8 - 18NPT	SS100
S-4432W	9IBS4432W	H32-	2.000	13.000	3/8 - 18NPT	SS100
S-4436W	9IBS4436W	H36-	2.250	15.000	3/8 - 18NPT	SS100
S-4440W	9IBS4440W	H40-	2.500	17.000	3/8 - 18NPT	SS83


S-4400W48 Steel Shank with Through Coolant

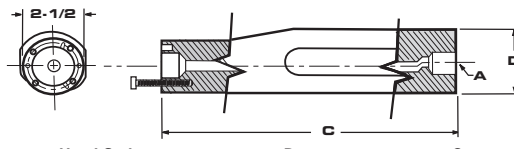

PARTS

Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-4440W48	9IBS4440W48	H40-	3.000	18.000	3/8 - 18NPT	SS89

S-570 Steel Shank with Through Coolant

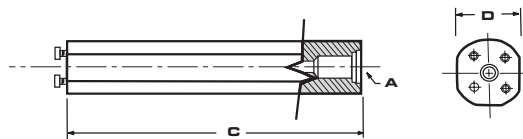

PARTS


Description	EDP Code	Head Style	D	C	A	Screw (4 req/d)
S-570-10-16	9IBS5701016	HS16-	0.625	4.210	1/8 - 27NPT	SS62
S-570-12-20	9IBS5701220	HS20-	0.750	5.200	1/4 - 18NPT	SS63
S-570-16-25	9IBS5701625	HS25-	1.000	7.200	1/4 - 18NPT	SS64
S-570-20-32	9IBS5702032	HS32-	1.250	8.740	3/8 - 18NPT	SS81
S-570-24-40	9IBS5702440	HS40-	1.500	10.750	1/2 - 14NPT	SS100
S-570-32-50	9IBS5703250	HS50-	2.000	14.410	1/2 - 14NPT	SS94
S-570-40-60	9IBS5704060	HS60-	2.500	18.430	1/2 - 14NPT	SS95



TURNING

H-MCLNL/R* 5° Head for 80° Diamond

Most heads available with coolant port
(ie: Add CP to end of description)

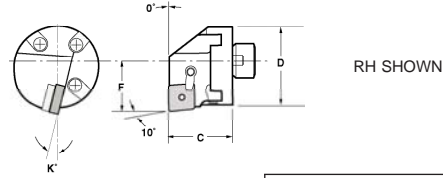


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock			Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw	
H16-MCLNR-4	9IHT2801656	CN_-43	1.000	1.625	0.640	1.200	N/A	NL-44	CL-20	XNS-47	N/A	
H20-MCLNR-4	9IHT2802056	CN_-43	1.250	1.625	0.765	1.470	ICSN-433	NL-46	CL-20	XNS-47	S-46	
H24-MCLNR-4	9IHT2802456	CN_-43	1.500	1.625	0.890	1.760	ICSN-433	NL-46	CL-20	XNS-47	S-46	
H28-MCLNR-4	9IHT2802856	CN_-43	1.750	1.625	1.015	2.010	ICSN-433	NL-46	CL-20	XNS-47	S-46	
H32-MCLNR-5	9IHT2803264	CN_-54	2.000	1.625	1.281	2.400	ICSN-533	NL-58	CL-12	XNS-510	S-58	
H32-MCLNR-6	9IHT2803272	CN_-64	2.000	1.625	1.281	2.400	ICSN-633	NL-68	CL-12	XNS-510	S-68	
H40-MCLNR-6	9IHT2804072	CN_-64	2.500	1.625	1.531	3.030	ICSN-633	NL-68	CL-12	XNS-510	S-68	

*Left hand quoted on request.

HS-MCLNL/R* 5° Head for 80° Diamond (570 Type)

Most heads available with coolant port
(ie: Add CP to end of description)

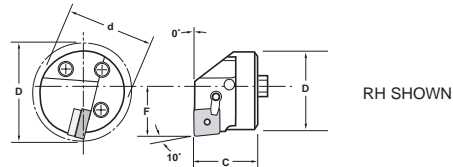


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock			Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw	
HS32-MCLNR-4	9IHST28032M56	CN_-43	1.260	1.260	0.866	1.570	ICSN-433	NL-46	CL-20	XNS-47	S-46	
HS40-MCLNR-4	9IHST28040M56	CN_-43	1.575	1.260	1.063	1.970	ICSN-433	NL-46	CL-20	XNS-47	S-46	
HS50-MCLNR-5	9IHST28050M64	CN_-54	1.969	1.570	1.378	2.480	ICSN-533	NL-58	CL-12	XNS-510	S-58	
HS50-MCLNR-6	9IHST28050M72	CN_-64	1.969	1.570	1.378	2.480	ICSN-633	NL-68	CL-12	XNS-510	S-68	
HS60-MCLNR-6	9IHST28060M72	CN_-64	2.362	1.570	1.693	3.150	ICSN-633	NL-68	CL-12	XNS-510	S-68	

*Left hand quoted on request.

H-MDUNL/R* 3° Head for 55° Diamond

Most heads available with coolant port
(ie: Add CP to end of description)

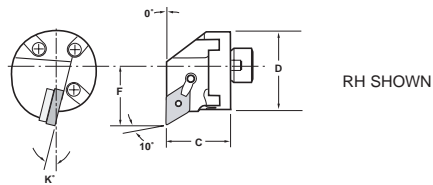

RH SHOWN

PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock			Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw	
H16-MDUNR-3	9IHT6821648	DN_-33	1.000	1.625	0.750	1.300	N/A	NL-33L	CL-7	XNS-47	N/A	
H24-MDUNR-3	9IHT6822448	DN_-33	1.500	1.625	1.125	2.000	IDSN-322	NL-34L	CL-7	XNS-47	S-34	
H32-MDUNR-3	9IHT6823248	DN_-33	2.000	1.625	1.320	2.500	IDSN-322	NL-34L	CL-7	XNS-47	S-34	
H40-MDUNR-3	9IHT6824048	DN_-33	2.500	1.625	1.750	3.250	IDSN-322	NL-34L	CL-7	XNS-47	S-34	
H20-MDUNR-4	9IHT6822056	DN_-43	1.250	1.625	1.000	1.705	IDSN-443	NL-46L	CL-20	XNS-59	S-46	
H24-MDUNR-4	9IHT6822456	DN_-43	1.500	1.625	1.125	2.000	IDSN-443	NL-46L	CL-12	XNS-59	S-46	
H28-MDUNR-4	9IHT6822856	DN_-43	1.750	1.625	1.250	2.250	IDSN-443	NL-46L	CL-12	XNS-59	S-46	
H32-MDUNR-4	9IHT6823256	DN_-43	2.000	1.625	1.370	2.500	IDSN-443	NL-46L	CL-12	XNS-59	S-46	
H36-MDUNR-4	9IHT6823656	DN_-43	2.250	1.625	1.495	2.870	IDSN-443	NL-46L	CL-12	XNS-59	S-46	
H40-MDUNR-4	9IHT6824056	DN_-43	2.500	1.625	1.750	3.250	IDSN-443	NL-46L	CL-12	XNS-59	S-46	


*Left hand quoted on request.



HS-MDUNL/R*

3° Head for 55° Diamond (570 Type)

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat	
							Seat	Pin	Clamp	Screw	Screw	Screw
HS40-MDUNR-4	9IHST68240M56	DN_-44	1.575	1.260	1.063	1.970	IDSN-433	NL-46	CL-12	XNS-59	S-46	S-46
HS50-MDUNR-4	9IHST68240M56	DN_-44	1.969	1.570	1.378	2.480	IDSN-433	NL-46	CL-12	XNS-59	S-46	S-46
HS60-MDUNR-4	9IHST68240M56	DN_-44	2.362	1.570	1.683	2.480	IDSN-433	NL-46	CL-12	XNS-59	S-46	S-46

*Left hand quoted on request.

H-MSKNL/R*

15° Head for 90° Square

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat	
							Seat	Pin	Clamp	Screw	Screw	Screw
H20-MSKNR-4	9IHT7002056	SN_-43	1.250	1.625	0.765	1.470	N/A	NL-44	CL-9	XNS-59	N/A	N/A
H24-MSKNR-4	9IHT7002456	SN_-43	1.500	1.625	0.890	1.760	ISSN-433	NL-46	CL-9	XNS-59	S-46	S-46
H28-MSKNR-4	9IHT7002856	SN_-43	1.750	1.625	1.015	2.010	ISSN-433	NL-46	CL-9	XNS-59	S-46	S-46
H32-MSKNR-4	9IHT7003256	SN_-43	2.000	1.625	1.281	2.400	ISSN-433	NL-46	CL-9	XNS-59	S-46	S-46
H40-MSKNR-6	9IHT7004064	SN_-64	2.500	1.625	1.625	3.030	ISSN-633	NL-68	CL-12	XNS-510	S-68	S-68

*Left hand quoted on request.

HS-MSKNL/R*

15° Head for 90° Square (570 Type)

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat	
							Seat	Pin	Clamp	Screw	Screw	Screw
HS32-MSKNR-4	9IHST70032M56	SN_-43	1.260	1.260	0.669	1.470	N/A	NL-44	CL-9	XNS-59	N/A	N/A
HS40-MSKNR-4	9IHST70040M56	SN_-43	1.575	1.260	0.866	1.760	ISSN-433	NL-46	CL-9	XNS-59	S-46	S-46
HS50-MSKNR-4	9IHST70050M56	SN_-43	1.969	1.570	1.063	2.400	ISSN-433	NL-46	CL-9	XNS-59	S-46	S-46
HS60-MSKNR-6	9IHST70060M64	SN_-64	2.362	1.570	1.378	3.030	ISSN-633	NL-68	CL-12	XNS-510	S-68	S-68

*Left hand quoted on request.

H-MTFNL/R*

90° Head for 60° Triangle

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat	
							Seat	Pin	Clamp	Screw	Screw	Screw
H16-MTFNR-3	9IHT7062048	TN_-33	1.000	1.625	0.640	1.220	N/A	NL-33L	CL-7	XNS-47	N/A	N/A
H24-MTFNR-3	9IHT7062448	TN_-33	1.500	1.625	0.890	1.760	ITSN-323	NL-34L	CL-7	XNS-47	S-34	S-34
H28-MTFNR-3	9IHT7062848	TN_-33	1.750	1.625	1.015	2.010	ITSN-323	NL-34L	CL-7	XNS-47	S-34	S-34
H32-MTFNR-4	9IHT7063256	TN_-43	2.000	1.625	1.281	2.400	ITSN-433	NL-46	CL-9	XNS-59	S-46	S-46
H40-MTFNR-4	9IHT7064056	TN_-43	2.500	1.625	1.531	3.030	ITSN-433	NL-46	CL-9	XNS-59	S-46	S-46


*Left hand quoted on request.



TURNING

HS-MTFNL/R* 90° Head for 60° Triangle (570 Type)

Most heads available with coolant port
(ie: Add CP to end of description)

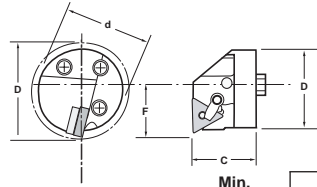

RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw
HS25-MTFNR-3	9IHST70625M48	TN_-33	0.984	1.260	0.866	1.570	N/A	NL-33L	CL-7	XNS-47	N/A
HS40-MTFNR-3	9IHST70640M48	TN_-33	1.575	1.260	1.062	1.970	ITSN-323	NL-34L	CL-7	XNS-47	S-34
HS50-MTFNR-4	9IHST70650M56	TN_-43	1.969	1.570	1.380	2.480	ITSN-433	NL-46	CL-9	XNS-59	S-46
HS60-MTFNR-4	9IHST70660M56	TN_-43	2.362	1.570	1.693	3.150	ITSN-433	NL-46	CL-9	XNS-59	S-46

*Left hand quoted on request.

H-MVUNL/R* 3° Head for 35° Diamond

Most heads available with coolant port
(ie: Add CP to end of description)

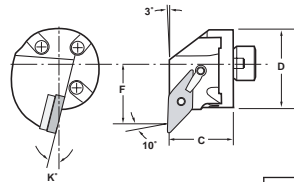

RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw
H20-MVUNR-3	9IHT7122049	VN_-33	1.000	1.625	1.000	1.705	IVSN-322	NL-34L	CL-30	XNS-510	S-34
H24-MVUNR-3	9IHT7122449	VN_-33	1.500	1.625	1.125	2.000	IVSN-322	NL-34L	CL-30	XNS-510	S-34
H32-MVUNR-3	9IHT7123249	VN_-33	2.000	1.625	1.325	2.500	IVSN-322	NL-34L	CL-30	XNS-510	S-34
H40-MVUNR-3	9IHT7124049	VN_-43	2.500	1.625	1.750	3.250	IVSN-322	NL-34L	CL-30	XNS-510	S-34
H32-MVUNR-4	9IHT7123256	VN_-43	2.000	1.625	1.375	2.500	IVSN-433	NL-46	CL-12	XNS-510	S-46
H40-MVUNR-4	9IHT7124056	VN_-43	2.500	1.625	1.750	3.250	IVSN-433	NL-46	CL-12	XNS-510	S-46

*Left hand quoted on request.

HS-MVUNL/R* 3° Head for 35° Diamond (570 Type)

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN


PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw
HS32-MVUNR-3	9IHST71232M49	VN_-33	1.259	1.260	1.000	1.705	IVSN-322	NL-34L	CL-30	XNS-510	S-34
HS40-MVUNR-3	9IHST71240M49	VN_-33	1.575	1.260	1.125	2.000	IVSN-322	NL-34L	CL-30	XNS-510	S-34
HS50-MVUNR-3	9IHST71250M49	VN_-33	1.969	1.570	1.750	3.250	IVSN-322	NL-34L	CL-30	XNS-510	S-34
HS60-MVUNR-3	9IHST71260M49	VN_-33	2.362	1.570	1.375	2.500	IVSN-322	NL-34L	CL-30	XNS-510	S-34
HS50-MVUNR-4	9IHST71250M56	VN_-43	1.969	1.570	1.750	3.250	IVSN-433	NL-46	CL-12	XNS-510	S-46
HS60-MVUNR-4	9IHST71260M56	VN_-43	2.362	1.570	1.375	2.500	IVSN-433	NL-46	CL-12	XNS-510	S-46

*Left hand quoted on request.

H-MWLNL/R* 5° Head for 80° Trigon

Most heads available with coolant port
(ie: Add CP to end of description)



RH SHOWN

PARTS


Description	EDP Code	Insert	D	C	F	Min. Bore	Lock		Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw
H16-MWLNR-3	9IHT7301649	WN_-33	1.000	1.625	0.640	1.200	IWSN-322	NL-33L	CL-6	XNS-36	N/A
H20-MWLNR-3	9IHT7302049	WN_-33	1.250	1.625	0.765	1.470	IWSN-322	NL-34L	CL-6	XNS-36	N/A
H24-MWLNR-3	9IHT7302449	WN_-33	1.500	1.625	0.890	1.760	IWSN-322	NL-34L	CL-6	XNS-36	N/A
H32-MWLNR-3	9IHT7303249	WN_-33	2.000	1.625	1.281	2.400	IWSN-322	NL-34L	CL-6	XNS-36	N/A
H20-MWLNR-4	9IHT7302056	WN_-43	1.250	1.625	0.765	1.470	IWSN-433	NL-46	CL-20	XNS-47	N/A
H24-MWLNR-4	9IHT7302456	WN_-43	1.500	1.625	0.890	1.760	IWSN-433	NL-46	CL-20	XNS-47	N/A
H28-MWLNR-4	9IHT7302856	WN_-43	1.750	1.625	1.015	2.010	IWSN-433	NL-46	CL-20	XNS-47	N/A
H32-MWLNR-4	9IHT7303256	WN_-43	2.000	1.625	1.281	2.400	IWSN-433	NL-46	CL-20	XNS-47	N/A

*Left hand quoted on request.

TURNING



HS-MWLNL/R* 5° Head for 80° Trigon (570 Type)



RH SHOWN

Most heads available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	D	C	F	Min. Bore	Lock			Clamp		Seat
							Seat	Pin	Clamp	Screw	Screw	Screw
HS25-MWLNR-3	9IHST73025M49	WN_-33	.984	1.260	0.640	1.200	IWSN-322	NL-33L	CL-6	XNS-36	N/A	
HS32-MWLNR-3	9IHST73032M49	WN_-33	1.259	1.260	0.765	1.470	IWSN-322	NL-34L	CL-6	XNS-36	N/A	
HS40-MWLNR-3	9IHST73040M49	WN_-33	1.575	1.260	0.890	1.760	IWSN-322	NL-34L	CL-6	XNS-36	N/A	
HS50-MWLNR-3	9IHST73050M49	WN_-33	1.969	1.570	1.281	2.400	IWSN-322	NL-34L	CL-6	XNS-36	N/A	
HS32-MWLNR-4	9IHST73032M56	WN_-43	1.259	1.260	0.765	1.470	IWSN-433	NL-46	CL-20	XNS-47	N/A	
HS40-MWLNR-4	9IHST73040M56	WN_-43	1.575	1.260	0.890	1.760	IWSN-433	NL-46	CL-20	XNS-47	N/A	
HS50-MWLNR-4	9IHST73050M56	WN_-43	1.969	1.570	1.281	2.400	IWSN-433	NL-46	CL-20	XNS-47	N/A	

*Left hand quoted on request.



TURNING

Material			Chipbreaker	Depth of Cut	Feed Rate
Low Carbon Steels BHN 100-225	STEEL	NEGATIVE ROUGH ← FINISH →	FM	.020 - .080	.004 - .008
Carbon Steels BHN 200-300			MM	.040 - .160	.008 - .016
Alloy Steels BHN 225-275			RM	.080 - .200	.012 - .020
Alloy Steels BHN 275-400			HR	.120 - .260	.014 - .024
Alloy Steels BHN Over 400		POSITIVE ROUGH ← FINISH →	FM	.020 - .060	.004 - .008
Tool Steels Hot & Cold Worked			MM	.040 - .140	.004 - .010
Martensitic Stainless Steel 400 Series			RM	.040 - .160	.008 - .014
Austenitic Stainless Steel 300 Series	STAINLESS STEEL	NEGATIVE ROUGH ← FINISH →	FM	.040 - .120	.006 - .012
			MM	.040 - .140	.008 - .016
			RM	.060 - .160	.010 - .018
PH Duplex		POSITIVE ROUGH ← FINISH →	FM	.020 - .080	.002 - .006
			MM	.020 - .120	.002 - .008
			RM	.040 - .140	.004 - .010
Gray Iron	CAST IRON	NEGATIVE ROUGH ← FINISH →	FM	.040 - .140	.008 - .014
Ductile Iron BHN 140-180			RM	.060 - .160	.010 - .016
Ductile Iron BHN 190-250			FLAT TOP	.040 - .200	.008 - .020
Spheroidal Iron BHN 190-250	NON-FERROUS	NEG	FM	.020 - .100	.004 - .010
Aluminum > 5% Silicon			RM	.060 - .140	.010 - .016
Aluminum < 5% Silicon		POSITIVE ROUGH ← FINISH →	FM	.020 - .080	.002 - .006
			MM	.060 - .280	.008 - .022
Copper / Zinc / Brass			RM	.080 - .300	.012 - .022

TURNING



Cutting Data - Surface feet per minute (meters per minute)

			AGS50		AGS54	
			F	R	F	R
STEEL	Free Machining Carbon Steels	m/min	500	250	250	150
		sfm	1600	640	800	480
	Plain Carbon Steels	m/min	400	200	180	50
		sfm	1280	640	576	160
	Alloy Steels 190-330 HB	m/min	300	140		
		sfm	960	400		
Alloy Steels 330-450 HB	m/min	180	120			
	sfm	576	384			

			APS35	
			F	R
STAINLESS STEEL	Martensitic 400 Series	m/min	165	80
		sfm	540	260
	300 Series	m/min	165	80
		sfm	540	260

			AS20	
			F	R
CAST IRON	Grey Cast 190-330 HB	m/min	500	250
		sfm	1600	640
	Grey Cast 330-450 HB	m/min	300	140
		sfm	876	448
	Alloy/Ductile	m/min	250	120
		sfm	800	384



			APS35	
			F	R
NON-FERROUS	Free Machining Aluminum	m/min	180	100
		sfm	540	260
	High Silicon Aluminum Alloys	m/min	95	50
		sfm	304	160
	Copper Zinc Brass	m/min	180	100
		sfm	576	330
	Non-Metallics	m/min	180	100
		sfm	576	330

			APS35	
			F	R
HIGH TEMP ALLOYS	High Temp Alloys 200-260 HB	m/min	200	60
		sfm	650	200
	High Temp Alloys 260-450 HB	m/min	65	35
		sfm	215	115
	Titanium Alloys (Ti 6Al-4V)	m/min	180	110
		sfm	525	345

NOTE: Decrease Vc if interrupted cut, roughing, unstable conditions and/or uncoated grade



TOOL-FLO

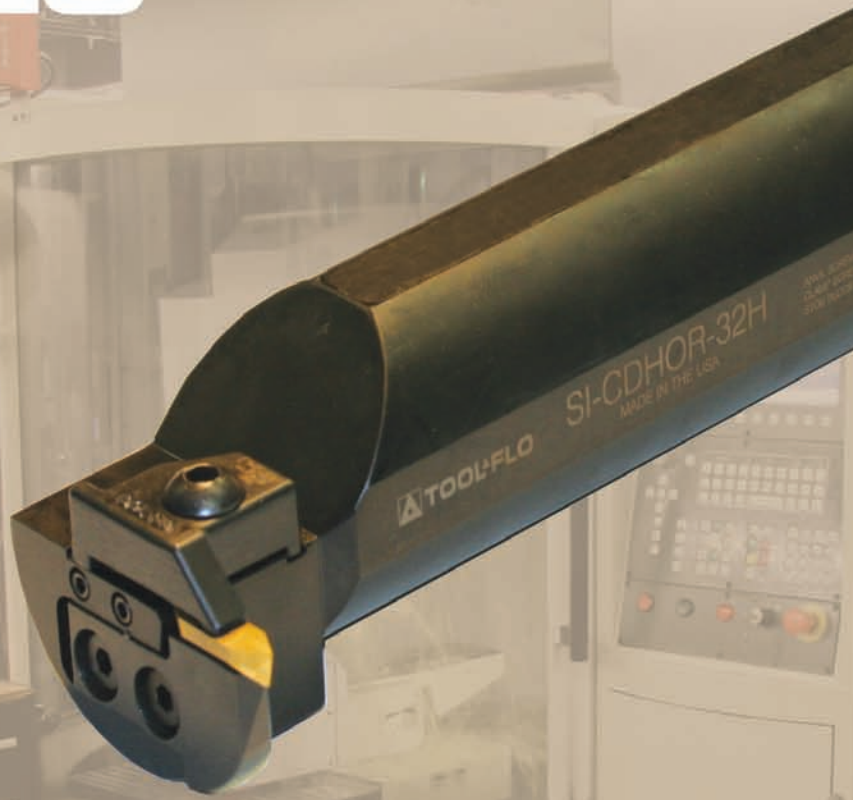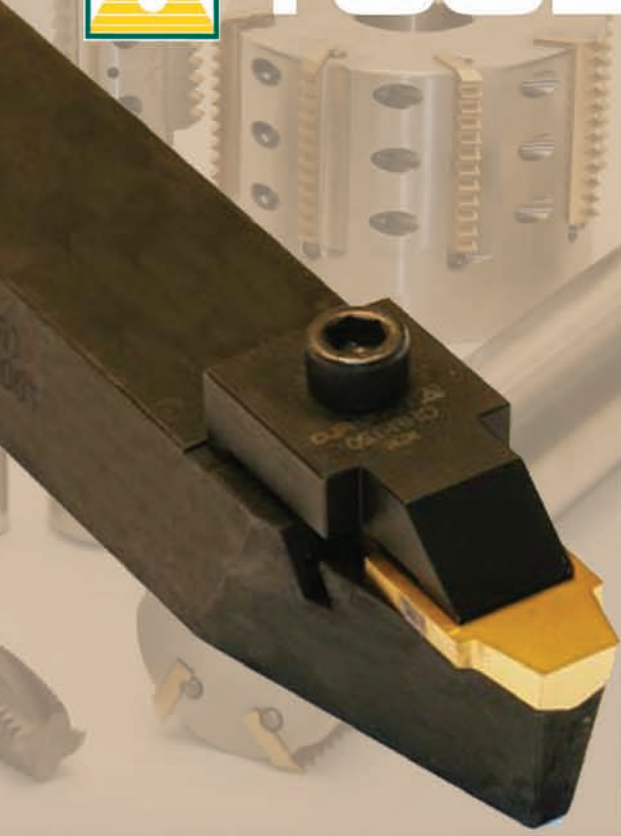


VEE BOTTOM

VEE BOTTOM



ACME THREADING


V84/V85/V120

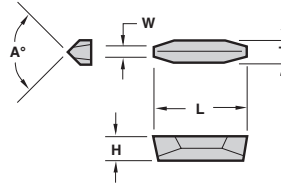

Description	EDP Code	TPI	W	T	L	H	A°	Coating						
								C3	GP3	GP5	GP50	AC3	AC50	
V84 NT 3P	0261030	3	.1184	.250	1.000	.250	90°							
V84 NT 4P	0261040	4	.0875	.250	1.000	.250	90°	●						
V84 NT 5P	0261050	5	.0689	.250	1.000	.250	90°	●						
V84 NT 6P	0261060	6	.0566	.250	1.000	.250	90°	●						
V84 NT 8P	0261080	8	.0411	.250	1.000	.250	90°	●						
V84 NT 10P	0261100	10	.0319	.250	1.000	.250	90°	●						
V84 NT 12P	0261120	12	.0283	.250	1.000	.250	90°	●						
V85 NT 2P	0263020	2	.1802	.312	1.000	.250	90°	●						
V85 NT 3P	0263030	3	.1184	.312	1.000	.250	90°	●						
V120 NT 1P	0270010	1	.3655	.750	1.500	.375	120°		●					
V120 NT 1.5P	0270015	1.5	.2419	.750	1.500	.375	120°		●					

ACME STUB THREADING


V84/V85/V120



Description	EDP Code	TPI	W	T	L	H	A°	Coating						
								C3	GP3	GP5	GP50	AC3	AC50	
V84 NT 3P STUB	0261031	3	.1356	.250	1.000	.250	90°		●					
V84 NT 4P STUB	0261041	4	.1004	.250	1.000	.250	90°		●					
V84 NT 5P STUB	0261051	5	.0793	.250	1.000	.250	90°		●					
V84 NT 6P STUB	0261061	6	.0652	.250	1.000	.250	90°		●					
V84 NT 8P STUB	0261081	8	.0476	.250	1.000	.250	90°		●					
V84 NT 10P STUB	0261101	10	.0370	.250	1.000	.250	90°		●					
V84 NT 12P STUB	0261121	12	.0326	.250	1.000	.250	90°		●					
V85 NT 2P STUB	0263021	2	.2060	.312	1.000	.250	90°		●					
V120 NT 1P STUB	0270011	1	.4172	.750	1.500	.375	120°		●					

API BUTTRESS THREADING

V84





Description	EDP Code	TPI	TPF	T	L	H	Connection	Coating						
								C3	GP3	GP5	GP50	AC3	AC50	
V84 5B75 EXT-FC*	16614F	5	3/4	.250	1.000	.250	4-1/2 - 13-3/8							
V84 5B1 EXT-FC	17614F	5	1	.250	1.000	.250	16 and larger							
V84 8B75 EXT-FC	21614F	8	3/4	.250	1.000	.250	US Improved Buttress							
V84 5B75 INT-FC	16618F	5	3/4	.250	1.000	.250	4-1/2 - 13-3/8							
V84 5B1 INT-FC	17618F	5	1	.250	1.000	.250	16 and larger							
V84 8B75 INT-FC	21618F	8	3/4	.250	1.000	.250	US Improved Buttress							

*FC indicates 5° flank clearance

API HUGHES THREADING

V85/V96



Description	EDP Code	TPI	TPF	T	L	H	Connection	Coating						
								C3	GP3	GP5	GP50	AC3	AC50	
V85 H902 EXT	28634	3-1/2	2	.250	1.000	.250	3-1/2 - 6-5/8 H90							
V85 H902 INT	28638	3-1/2	2	.250	1.000	.250	3-1/2 - 6-5/8 H90							
V85 H903 EXT	29634	3-1/2	3	.250	1.000	.250	7 - 8-5/8							
V85 H903 INT	29638	3-1/2	3	.250	1.000	.250	7 - 8-5/8							
V96 H90S EXT	27664	3	1-1/4	.375	1.125	.375	2-3/8 - 3-1/2 Slimline			●	●			
V96 H90S INT	27668	3	1-1/4	.375	1.125	.375	2-3/8 - 3-1/2 Slimline			●	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel



Coating	Material					
	C3	GP3	GP5	GP50	AC3	AC50
Uncoated						
TIN Coated						
AlTiN Coated						
Cast Iron		●				
Non-Ferrous		●				
Stainless/High Temp		●				
Steel			●	●		



VEE BOTTOM

API ROTARY SHOULDER THREADING

V85




Description	EDP Code	TPI	TPF	T	L	H	Connection	Coating						
								C3	GP3	GP5	GP50	AC3	AC50	
V85 425 EXT	09634	4	2	.312	1.000	.250	5-1/2 - 6-5/8 FH, 6-5/8 REG							
V85 428 EXT	10634	4	2	.312	1.000	.250	NC23 - 50, 2-3/8 - 5-1/2 IF				●	●	●	
V85 42F EXT*	14634	4	2	.312	1.000	.250	VO.065*				●	●	●	
V85 435 EXT	11634	4	3	.312	1.000	.250	5-1/2 REG, 7-5/8 REG, 8-5/8 REG				●	●	●	
V85 438 EXT	12634	4	3	.312	1.000	.250	NC56 - NC71				●	●	●	
V85 530 EXT	13634	5	3	.312	1.000	.250	3-1/2FH, 2-3/8 - 4-1/2 REG				●	●	●	
V85 4PAC EXT	15634	4	1-1/2	.312	1.000	.250	2-3/8 - 4-1/2 AMERICAN/PAC				●	●	●	
V85 425 INT	09638	4	2	.312	1.000	.250	5-1/2 - 6-5/8 FH, 6-5/8 REG				●	●	●	
V85 428 INT	10638	4	2	.312	1.000	.250	NC23 - 50, 2-3/8 - 5-1/2 IF				●	●	●	
V85 42F INT*	14638	4	2	.312	1.000	.250	VO.065*				●	●	●	
V85 435 INT	11638	4	3	.312	1.000	.250	5-1/2 REG, 7-5/8 REG, 8-5/8 REG				●	●	●	
V85 438 INT	12638	4	3	.312	1.000	.250	NC56 - NC71				●	●	●	
V85 530 INT	13638	5	3	.312	1.000	.250	3-1/2FH, 2-3/8 - 4-1/2 REG				●	●	●	
V85 4PAC INT	15638	4	1-1/2	.312	1.000	.250	2-3/8 - 4-1/2 AMERICAN/PAC				●	●	●	

* Obsolete thread form, See A.P.I. Spec 7, 35th Edition, May 1, 1995, Section 9.4

API ROUND THREADING


V84

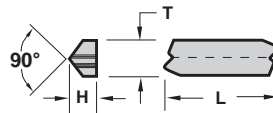

Description	EDP Code	TPI	TPF	T	L	H	Coating							
							C3	GP3	GP5	GP50	AC3	AC50		
V84 10RD EXT	34614	10	3/4	.250	1.000	.250								
V84 10RD INT	34618	10	3/4	.250	1.000	.250					●	●	●	
V84 8RD EXT	32614	8	3/4	.250	1.000	.250					●	●	●	
V84 8RD INT	32618	8	3/4	.250	1.000	.250					●	●	●	

API VAM THREADING

V84

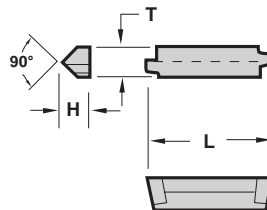



Description	EDP Code	TPI	TPF	T	L	H	Coating							
							C3	GP3	GP5	GP50	AC3	AC50		
V84 5 VAM EXT	23614	5	3/4	.250	1.000	.250								
V84 5 VAM INT	23618	5	3/4	.250	1.000	.250					●	●	●	
V84 6 VAM EXT	24614	6	3/4	.250	1.000	.250					●	●	●	
V84 6 VAM INT	24618	6	3/4	.250	1.000	.250					●	●	●	
V84 8 VAM EXT	25614	8	3/4	.250	1.000	.250					●	●	●	
V84 8 VAM INT	25618	8	3/4	.250	1.000	.250					●	●	●	

VEE
BOTTOM

VEE BOTTOM




API X-LINE THREADING V84



Description	EDP Code	TPI	TPF	T	L	H	Connection	Coatings						
								C3	GP3	GP5	GP50	AC3	AC50	
V84 5XL12 EXT	18614	5	1-1/4	.250	1.000	.250	8-5/8 - 10-3/4					●		
V84 5XL12 INT	18618	5	1-1/4	.250	1.000	.250	8-5/8 - 10-3/4					●		
V84 6XL15 EXT	19614	6	1-1/2	.250	1.000	.250	5 - 7-5/8					●		
V84 6XL15 INT	19618	6	1-1/2	.250	1.000	.250	5 - 7-5/8					●		
V84 6XL75 EXT	20614	6	3/4	.250	1.000	.250	-					●		
V84 6XL75 INT	20618	6	3/4	.250	1.000	.250	-					●		

DEEP GROOVING DBP (SAME AS VDB)




Description	EDP Code	W	R	L	H	S	Coatings						
							C3	GP3	GP5	GP50	AC3	AC50	
DBP 24 R15	802415	.125	.015	1.125	.250	.106		●			●	●	●
DBP 24 R30	802430	.125	.030	1.125	.250	.106		●			●	●	●
DBP 34 R15	803415	.188	.015	1.125	.250	.106		●			●	●	●
DBP 34 R30	803430	.188	.030	1.125	.250	.106		●			●	●	●
DBP 45 R15	804515	.250	.015	1.125	.337	.144		●			●	●	●
DBP 45 R30	804530	.250	.030	1.125	.337	.144		●			●	●	●
DBP 55 R15	805515	.312	.015	1.125	.337	.202		●			●	●	●
DBP 55 R30	805530	.312	.030	1.125	.337	.202		●			●	●	●
DBP 65 R15	806515	.375	.015	1.125	.337	.276		●			●	●	●
DBP 65 R30	806530	.375	.030	1.125	.337	.276		●			●	●	●

DEEP GROOVING DBP-CB (SAME AS VDB)

Features:


- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths

Exclusive patented design!



Description	EDP Code	W	R	L	H	S	Coatings						
							C3	GP3	GP5	GP50	AC3	AC50	
DBP 24 R15-CB	802415C	.125	.015	1.125	.250	.106		●			●	●	●
DBP 34 R15-CB	803415C	.188	.015	1.125	.250	.106		●			●	●	●
DBP 45 R15-CB	804515C	.250	.015	1.125	.337	.144		●			●	●	●
DBP 45 R30-CB	804530C	.250	.030	1.125	.337	.144		●			●	●	●
DBP 55 R15-CB	805515C	.312	.015	1.125	.337	.202		●			●	●	●
DBP 55 R30-CB	805530C	.312	.030	1.125	.337	.202		●			●	●	●

DEEP GROOVING DBP-Full Nose Radius (SAME AS VDB)



Description	EDP Code	W	R	L	H	S	Coatings						
							C3	GP3	GP5	GP50	AC3	AC50	
DBP 24 FNR	8024FR	.125	.0625	1.125	.250	.106		●			●	●	●
DBP 34 FNR	8034FR	.188	.094	1.125	.250	.106		●			●	●	●
DBP 45 FNR	8045FR	.250	.125	1.125	.337	.144		●			●	●	●
DBP 55 FNR	8055FR	.312	.156	1.125	.337	.202		●			●	●	●
DBP 65 FNR	8065FR	.375	.1875	1.125	.337	.276		●			●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.


- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C3	GP3	GP5	GP50	AC3	AC50
Cast Iron		▲				●
Non-Ferrous		▲				●
Stainless/High Temp		▲				●
Steel			▲			●




VEE BOTTOM

DEEP GROOVING GC




Description	EDP Code	Inch	Metric	R	L	H	A°	Coating									
								C3	GP3	GP5	AC3	AC50	Uncoated	TIN Coated	AITIN Coated		
GC-4125	GC4125	.125	3,18	.010/.015	1.000	.188	4°		●			●	●	●			
GC-4187	GC4187	.187	4,75	.010/.015	1.000	.328	5°		●			●	●	●			
GC-4250	GC4250	.250	6,35	.010/.015	1.000	.328	5°		●			●	●	●			
GC-4312	GC4312	.312	7,92	.010/.015	1.000	.328	5°		●			●	●	●			
GC-4375	GC4375	.375	9,52	.010/.015	1.000	.328	5°		●			●	●	●			
GC-6187	GC6187	.187	4,75	.010/.015	1.500	.328	5°		●			●	●	●			
GC-6250	GC6250	.250	6,35	.010/.015	1.500	.328	5°		●			●	●	●			
GC-6312	GC6312	.312	7,92	.010/.015	1.500	.328	5°		●			●	●	●			

DEEP GROOVING GR - Full Nose Radius



Description	EDP Code	Inch	Metric	R	L	H	A°	Coating									
								C3	GP3	GP5	AC3	AC50	Uncoated	TIN Coated	AITIN Coated		
GR-4125	GR4125	.125	3,18	.062	1.000	.188	4°					●	●				
GR-4187	GR4187	.187	4,75	.094	1.000	.328	5°					●	●				
GR-4250	GR4250	.250	6,35	.125	1.000	.328	5°					●	●				

DEEP GROOVING VDB (SAME AS DBP)



Description	EDP Code	Inch	Metric	R	L	H	S	Coating									
								C25	GP25	GP3	GP50	AC3	AC50	Uncoated	TIN Coated	AITIN Coated	
VDB 125 A008	79125A08	.125	3,18	.008	1.125	.250	.106					●	●	●			
VDB 125 A015	79125A	.125	3,18	.015	1.125	.250	.106	●				●	●	●			
VDB 156 A008	79156A08	.156	3,96	.008	1.125	.250	.106					●	●	●			
VDB 156 A015	79156A	.156	3,96	.015	1.125	.250	.106					●	●	●			
VDB 188 A008	79188A08	.188	4,78	.008	1.125	.250	.106	●	●			●	●	●			
VDB 188 A015	79188A	.188	4,78	.015	1.125	.250	.106	●				●	●	●			
VDB 188 A030	79188A030	.188	4,78	.030	1.125	.250	.106					●	●	●			
VDB 218-A015	79218A	.218	5,54	.015	1.125	.250	.144					●	●	●			
VDB 250 A015	79250A	.250	6,35	.015	1.125	.250	.144	●				●	●	●			
VDB 250 B015	79250B	.250	6,35	.015	1.125	.337	.144					●	●	●			
VDB 250 B030	79250B030	.250	6,35	.030	1.125	.337	.144					●	●	●			
VDB 281 B015	79281B	.281	7,14	.015	1.125	.337	.202					●	●	●			
VDB 312 B015	79312B	.312	7,92	.015	1.125	.337	.202					●	●	●			
VDB 312 B030	79312B030	.312	7,92	.030	1.125	.337	.202					●	●	●			
VDB 344 B015	79344B	.344	8,74	.015	1.125	.337	.276					●	●	●			
VDB 344 B030	79344B030	.344	8,74	.030	1.125	.337	.276					●	●	●			
VDB 375 B015	79375B	.375	9,53	.015	1.125	.337	.276					●	●	●			
VDB 375 B030	79375B030	.375	9,53	.030	1.125	.337	.276					●	●	●			

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Material	C25	GP25	GP3	GP50	AC3	AC50
Cast Iron		▲				●
Non-Ferrous		▲				●
Stainless/High Temp		▲				●
Steel				▲		●

VEE BOTTOM

VEE BOTTOM




DEEP GROOVING

VDB-CB (SAME AS DBP)

Features:

- Patented chipbreaker - Patent No. 6,146,064
- Maximum chip control
- Industry standard widths


Exclusive patented design!



Description	EDP Code	Inch	Metric	R	L	H	S	Coatings					
								Uncoated	GP3	GP5	GP50	AC3	AC50
VDB 125 A008-CB	79125A08P	.125	3,18	.008	1.125	.250	.106	●	●	●	●	●	●
VDB 125 A015-CB	79125AP	.125	3,18	.015	1.125	.250	.106	●	●	●	●	●	●
VDB 156 A008-CB	79156A08P	.156	3,96	.008	1.125	.250	.106	●	●	●	●	●	●
VDB 156 A015-CB	79156AP	.156	3,96	.015	1.125	.250	.106	●	●	●	●	●	●
VDB 188 A008-CB	79188A08P	.188	4,78	.008	1.125	.250	.144	●	●	●	●	●	●
VDB 188 A015-CB	79188AP	.188	4,78	.015	1.125	.250	.144	●	●	●	●	●	●
VDB 188 A030-CB	79188A030P	.188	4,78	.030	1.125	.250	.144	●	●	●	●	●	●
VDB 218 A015-CB	79218AP	.218	5,54	.015	1.125	.250	.144	●	●	●	●	●	●
VDB 250 B015-CB	79250BP	.250	6,35	.015	1.125	.337	.144	●	●	●	●	●	●
VDB 250 B030-CB	79250B030P	.250	6,35	.030	1.125	.337	.144	●	●	●	●	●	●
VDB 312 B015-CB	79312BP	.312	7,92	.015	1.125	.337	.202	●	●	●	●	●	●
VDB 312 B030-CB	79312B030P	.312	7,92	.030	1.125	.337	.202	●	●	●	●	●	●
VDB 375 B015-CB	79375BP	.375	9,53	.015	1.125	.337	.276	●	●	●	●	●	●
VDB 375 B030-CB	79375B030P	.375	9,53	.030	1.125	.337	.276	●	●	●	●	●	●

DEEP GROOVING




VDB - Full Nose Radius (SAME AS DBP)

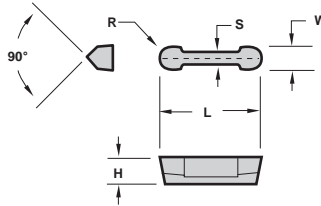

Description	EDP Code	Inch	Metric	R	L	H	S	Coatings					
								Uncoated	GP3	GP5	GP50	AC3	AC50
VDB 125 RA	79125RA	.125	3,18	.062	1.125	.250	.106	●	●	●	●	●	●
VDB 156 RA	79156RA	.156	3,96	.078	1.125	.250	.106	●	●	●	●	●	●
VDB 188 RA	79188RA	.188	4,78	.094	1.125	.250	.144	●	●	●	●	●	●
VDB 218 RA	79218RA	.218	5,54	.109	1.125	.250	.144	●	●	●	●	●	●
VDB 250 RA	79250RA	.250	6,35	.125	1.125	.250	.144	●	●	●	●	●	●
VDB 250 RB	79250RB	.250	6,35	.125	1.125	.337	.144	●	●	●	●	●	●
VDB 281 RB	79281RB	.281	7,14	.140	1.125	.337	.202	●	●	●	●	●	●
VDB 312 RB	79312RB	.312	7,92	.156	1.125	.337	.202	●	●	●	●	●	●
VDB 344 RB	79344RB	.344	8,74	.172	1.125	.337	.276	●	●	●	●	●	●
VDB 375 RB	79375RB	.375	9,53	.187	1.125	.337	.276	●	●	●	●	●	●

GROOVING

V84/V85/V96/V98/V120

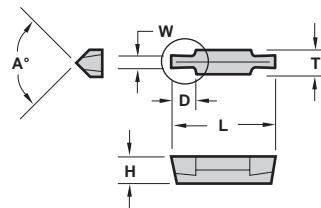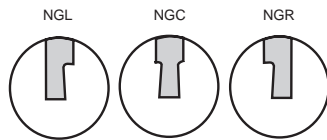

Description	EDP Code	Inch	Metric	D	T	L	H	A°	Coatings					
									Uncoated	GP3	GP5	GP50	AC3	AC50
V84 NGC W.062	C6106200	.062	1,57	.156	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGC W.094	C6109400	.094	2,39	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGC W.125	C6112500	.125	3,18	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGC W.187	C6118700	.187	4,75	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGC W.250	C6125000	.250	6,35	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGL W.125	L6112500	.125	3,18	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGL W.187	L6118700	.187	4,75	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGR W.125	R6112500	.125	3,18	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V84 NGR W.187	R6118700	.187	4,75	.250	.250	1.000	.250	90°	●	●	●	●	●	●
V85 NGC W.312	C6331200	.312	7,92	.325	.312	1.000	.250	90°	●	●	●	●	●	●
V96 NGC W.375	C6637500	.375	9,53	.450	.375	1.125	.375	90°	●	●	●	●	●	●
V98 NGC W.500	C6850000	.500	12,70	.450	.500	1.125	.375	90°	●	●	●	●	●	●
V120 NGC W.625	C7625000	.625	15,88	.625	.750	1.500	.375	120°	●	●	●	●	●	●
V120 NGC W.750	C7075000	.750	19,05	.625	.750	1.500	.375	120°	●	●	●	●	●	●

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.



Cast Iron	▲	●	●	●	●	●
Non-Ferrous	▲	●	●	●	●	●
Stainless/High Temp	▲	●	●	●	●	●
Steel	▲	●	●	●	●	●

VEE BOTTOM




VEE BOTTOM

NPT THREADING V84



Description	EDP Code	Pipe Size	TPI	TPF	T	L	H	Coatings						
								C3	GP3	GP5	GP50	AC3	AC50	
V84 8NPT EXT	3661084	2-1/2" - up	8	3/4	.250	1.000	.250				●			
V84 8NPT INT	3661088	2-1/2" - up	8	3/4	.250	1.000	.250				●			
V84 11.5NPT EXT	3661114	1" - 2"	11.5	3/4	.250	1.000	.250				●			
V84 11.5NPT INT	3661118	1" - 2"	11.5	3/4	.250	1.000	.250				●			
V84 14NPT EXT	3661144	1/2" - 3/4"	14	3/4	.250	1.000	.250				●			
V84 14NPT INT	3661148	1/2" - 3/4"	14	3/4	.250	1.000	.250				●			

60° V-THREADING V84/V85



Description	EDP Code	TPI	F	T	L	H	Coatings					
							C25	GP3	GP5	GP50	AC3	AC50
V84 NV	0161000	5-20	.006/.008	.250	1.000	.250	●	●	●	●	●	●
V84 NV .010R	0161R10	4-20	.010R	.250	1.000	.250		●	●	●	●	●
V84 NV .020R	0161R20	4-12	.020R	.250	1.000	.250			●	●	●	●
V84 NV .025R	0161R25	4-8	.025R	.250	1.000	.250			●	●	●	●
V84 NV .038R	0161R38	4-6	.038R	.250	1.000	.250			●	●	●	●
V85 NV	0163000	5-20	.006/.008	.312	1.000	.250				●	●	●



In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

● High performance choice in optimal conditions.
▲ Recommended grade under general conditions.

Cast Iron
Non-Ferrous
Stainless/High Temp
Steel

EXTERNAL 90° HOLDER CDHOR/L

■ RH Holders use LH components - See pages 216.

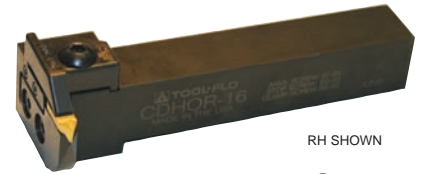


PARTS

Description	EDP Code	A	B	C	F*		Clamp Screw	Stop Screw	Anvil Screw
					.312(1)	.812(1)			
CDHOR-16	92101600	1	1	6	1.312	1.812	SB90	SS20	SF95
CDHOL-16	92001600	1	1	6	1.312	1.812	SB90	SS20	SF95
CDHOR-20	92102000	1-1/4	1-1/4	6	1.562	2.062	SB90	SS20	SF95
CDHOL-20	92002000	1-1/4	1-1/4	6	1.562	2.062	SB90	SS20	SF95
CDHOR-24	92102400	1-1/2	1-1/2	6	1.812	2.312	SB90	SS20	SF95
CDHOL-24	92002400	1-1/2	1-1/2	6	1.812	2.312	SB90	SS20	SF95

*The "F" dimension is determined by the D.O.C. of the anvil. (1) Anvil D.O.C.

EXTERNAL STRAIGHT HOLDER CDVOR/L

■ RH Holders use RH components - See pages 216.

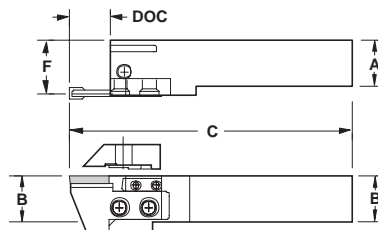

PARTS

Description	EDP Code	A	B	C	F	Clamp Screw	Stop Screw	Anvil Screw
CDVOL-16	92301600	1	1	*	1.150	SB90	SS20	SF95
CDVOR-20	92402000	1-1/4	1-1/4	*	1.400	SB90	SS20	SF95
CDVOL-20	92302000	1-1/4	1-1/4	*	1.400	SB90	SS20	SF95
CDVOR-24	92402400	1-1/2	1-1/2	*	1.650	SB90	SS20	SF95
CDVOL-24	92302400	1-1/2	1-1/2	*	1.650	SB90	SS20	SF95


*The "C" dimension is determined by the D.O.C. of the anvil. If the D.O.C. is .312, C=5.500. If the D.O.C. is .812, C=6.000.



EXTERNAL 90° HOLDER

CDHOR

Metric



PARTS


Description	EDP Code	A	B	C	7,0(1)	F*	20,0(1)	Clamp Screw	Stop Screw	Anvil Screw
CDHOR-25MM	92112500	25,0	25,0	150,0	33,3	46,0		SB90	SS20	SF95
CDHOR-32MM	92113200	32,0	32,0	150,0	39,7	52,4		SB90	SS20	SF95
CDHOR-40MM	92114000	40,0	40,0	150,0	46,0	58,7		SB90	SS20	SF95

*The "F" dimension is determined by the D.O.C. of the anvil. (1) Anvil D.O.C.

EXTERNAL STRAIGHT HOLDER

CDVOR/L

Metric

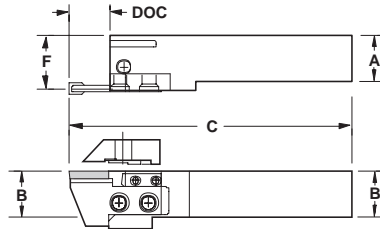

PARTS

Description	EDP Code	A	B	C	F	Clamp Screw	Stop Screw	Anvil Screw
CDVOR-25MM	92412500	25,0	25,0	*	28,8	SB90	SS20	SF95
CDVOL-25MM	92312500	25,0	25,0	*	28,8	SB90	SS20	SF95
CDVOR-32MM	92413200	32,0	32,0	*	35,8	SB90	SS20	SF95
CDVOR-40MM	92414000	40,0	40,0	*	43,8	SB90	SS20	SF95
CDVOL-40MM	92314000	40,0	40,0	*	43,8	SB90	SS20	SF95

*The "C" dimension is determined by the D.O.C. of the anvil. If the D.O.C. is .312 (7.9mm), C=5.500 (139,7mm). If the D.O.C. is .812 (20.6mm), C=6.000 (152.5mm).

COMPONENTS

For CDHOR/L and CDVOR/L

■ For face grooving anvils - See page

ANVIL

CLAMP

STOP BLOCK

Anvil	EDP Code	Insert	DOC	WOC	Clamp	Stop Block
AHR-118	9140118	VDB125	.812	.105-.125	CHR-182	SBH-1
AHL-118	9130118	VDB125	.812	.105-.125	CHL-182	SBH-1
AHR-148	9140148	V84/V85	.812	.220-.250	CHR-482	SBH-1
AHL-148	9130148	V84/V85	.812	.220-.250	CHL-482	SBH-1
AHR-173	9140173	V84/V85	.312	V-THREAD	CHR-431	SBH-1
AHL-173	9130173	V84/V85	.312	V-THREAD	CHL-431	SBH-1
AHR-113	9140113	DBP24/VDB125	.312	.105-.125	CHR-132	SBH-1
AHL-113	9130113	DBP24/VDB125	.312	.105-.125	CHL-132	SBH-1
AHR-138	9140138	DBP34/VDB188	.812	.170-.188	CHR-382	SBH-2
AHL-138	9130138	DBP34/VDB188	.812	.170-.188	CHL-382	SBH-2
AHR-148	9140148	VDB250A	.812	.220-.250	CHR-482	SBH-2
AHL-148	9130148	VDB250A	.812	.220-.250	CHL-482	SBH-2
AHR-248	9140248	DBP45/VDB250B	.812	.250-.312	CHR-482	SBH-2
AHL-248	9130248	DBP45/VDB250B	.812	.250-.312	CHL-482	SBH-2
AHR-268	9140268	DBP65/VDB375	.812	.350-.375	CHR-582	SBH-2
AHL-268	9130268	DBP65/VDB375	.812	.350-.375	CHL-582	SBH-2



VEE BOTTOM


EXTERNAL STRAIGHT HOLDER

CDVOR/L/C

One piece design

■ RH Holders use RH clamps

Most holders available with coolant port
(ie: Add CP to end of description)



CDVOR Shown



CDVOC Shown

PARTS


Description	EDP Code	Insert	A	B	C	F	Clamp	Clamp Screw
CDVOR-168	92401682	V84/V85	1	1	6	0.875	CHR-431	SB90
CDVOL-168	92301682	V84/V85	1	1	6	0.875	CHL-431	SB90
CDVOR-208	92402082	V84/V85	1-1/4	1-1/4	6	1.125	CHR-431	SB90
CDVOL-208	92302082	V84/V85	1-1/4	1-1/4	6	1.125	CHL-431	SB90
CDVOR-209	92402086	V98	1-1/4	1-1/4	7	1.000	CHR-98	SS100
CDVOC-2012	92202090	V120	1-1/4	1-1/4	7	0.625	CHR-120	SS90

INTERNAL BAR

SI-CDHOR

■ RH Holders use LH components

Most bars available with coolant port
(ie: Add CP to end of description)

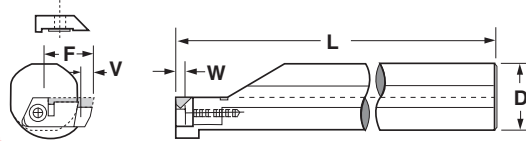

RH Shown

PARTS



Description	EDP Code	Insert	D	L	W	V	F	Min. Bore	D.O.C. at Min. Bore	Anvil	Anvil Screw	Clamp	Clamp Screw
SI-CDHOR-24	96802400	V84/V85	1-1/2	14	.188-.250	.180	1.062	1.880	.080	ABL/R-131	SF69	CBL/R-411	SB90
SI-CDHOL-24	96702400	V84/V85			60°V	.180	1.062	1.880	.080	ABL/R-171	SF69	CBL/R-411	SB90
		V85			.295-.312	.312	1.062	1.880	.080	ABL/R-143	SF69	CBL/R-531	SB90
		DBP24/VDB125			.105-.125	.312	1.062	1.880	.240	ABL/R-113	SF69	CBL/R-132	SB90
		DBP34/VDB188			.170-.188	.530	1.280	2.098	.240	ABL/R-135	SF69	CBL/R-352	SB90
		VDB250A			.220-.250	.530	1.280	2.098	.240	ABL/R-145	SF69	CBL/R-452	SB90
		DBP45/VDB250B			.220-.250	.530	1.280	2.098	.240	ABL/R-245	SF69	CBL/R-452	SB90

INTERNAL BAR

SI-CDHOR

■ RH Holders use LH components

Most bars available with coolant port
(ie: Add CP to end of description)

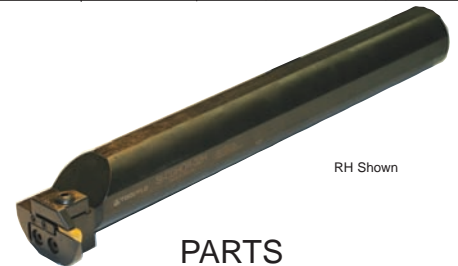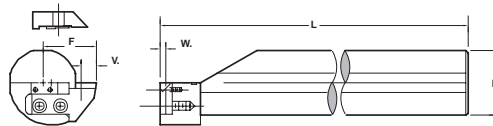

RH Shown

PARTS

Description	EDP Code	Insert	D	L	W	V	F	Min. Bore	D.O.C. at Min. Bore	Anvil	Anvil Screw	Clamp	Clamp Screw	Stop Block	SBH Screw
SI-CDHOR-32H	96803200H	V84/V85	2	16	.220-.250	.312	1.584	3.000	.150	AHL/R-148	SF95	CHL/R-482	SB90	SBH-1	SS-20
SI-CDHOL-32H	96703200H	V84/V85			60°V	.312	1.584	3.000	.150	AHL/R-173	SF95	CHL/R-431	SB90	SBH-1	SS-20
		DBP34/VDB188			.170-.188	.625	1.592	3.000	.270	AHL/R-138	SF95	CHL/R-382	SB90	SBH-2	SS-20
		VDB250A			.220-.250	.625	1.592	3.000	.270	AHL/R-148	SF95	CHL/R-482	SB90	SBH-2	SS-20
		DBP45/VDB250B			.220-.250	.625	1.592	3.000	.270	AHL/R-248	SF95	CHL/R-482	SB90	SBH-2	SS-20


INTERNAL BAR

SI-CDHOR/L

One piece design

■ RH Holders use LH components

Most bars available with coolant port
(ie: Add CP to end of description)

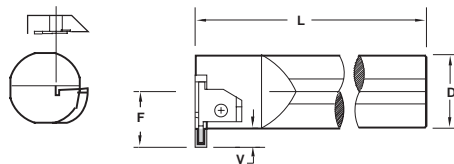

RH Shown

PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	D.O.C. at Min. Bore	Clamp Screw	Clamp
SI-CDHOR-168	96801682	V84/V85	2.500	1	10	.687	.270	.200	S526	CBL-84
SI-CDHOL-168	96701682	V84/V85	2.500	1	10	.687	.270	.200	S526	CBR-84
SI-CDHOR-208	96802082	V84/V85	2.500	1-1/4	12	.875	.285	.250	S526	CBL-84
SI-CDHOL-208	96702082	V84/V85	2.500	1-1/4	12	.875	.285	.250	S526	CBR-84
SI-CDHOR-329	96803286	V98	3.100	2	16	1.530	.325	.312	SS110	CBL-98
SI-CDHOL-329	96703286	V98	3.100	2	16	1.530	.325	.312	SS110	CBR-98
SI-CDHOR-409	96804086	V98	4.000	2-1/2	16	1.575	.365	.312	SS110	CBL-98
SI-CDHOR-4012	96804092	V120	4.000	2-1/2	16	1.575	.570	.500	SB100	CBL-120

VEE BOTTOM





EXTERNAL STRAIGHT HOLDER

CDVOR/L/C

One piece design

Metric

Most holders available with coolant port
(ie: Add CP to end of description)

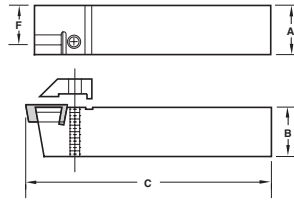

CDVOC Shown

PARTS

Description	EDP Code	Insert	A	B	C	F	Clamp	Clamp Screw
CDVOR-25M8	92412582	V84/V85	25,0	25,0	150,0	21,8	CHR-431	SB90
CDVOL-25M8	92312582	V84/V85	25,0	25,0	150,0	21,8	CHL-431	SB90
CDVOR-32M8	92413282	V84/V85	32,0	32,0	150,0	28,8	CHR-431	SB90
CDVOL-32M8	92313282	V84/V85	32,0	32,0	150,0	28,8	CHL-431	SB90
CDVOR-32M9	92413286	V98	32,0	32,0	180,0	25,5	CHR-98	SS100
CDVOC-32M12	92413290	V120	32,0	32,0	180,0	22,5	CHR-120	SS90



INTERNAL BAR

SI-CDHOR

Metric

RH Bars use LH components

Most bars available with coolant port
(ie: Add CP to end of description)

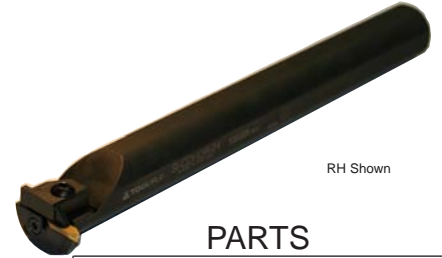

RH Shown

PARTS

Description	EDP Code	Insert	D	L	W	V	F	Min. Bore	D.O.C. at Min. Bore	Anvil	Anvil Screw	Clamp	Clamp Screw
SI-CDHOR-40MM	96814000	V84	40,0	360,0	5,5-6,5	4,5	28,9	48,0	2,0	ABL/R-131	SF69	CBL/R-411	SB90
		V84			60°V	4,5	28,9	48,0	2,0	ABL/R-171	SF69	CBL/R-411	SB90
		V85			7,5-8,0	7,9	28,9	48,0	2,0	ABL/R-143	SF69	CBL/R-531	SB90
		DBP24/VDB125			2,6-3,2	7,9	28,9	53,5	6,0	ABL/R-113	SF69	CBL/R-132	SB90
		DBP34/VDB188			4,3-4,8	13,6	34,3	53,5	6,0	ABL/R-135	SF69	CBL/R-352	SB90
		VDB250A			5,5-6,5	13,6	34,3	53,5	6,0	ABL/R-145	SF69	CBL/R-452	SB90
		DBP45/VDB250B			5,5-6,5	13,6	34,3	53,5	6,0	ABL/R-245	SF69	CBL/R-452	SB90



INTERNAL BAR

SI-CDHOR

Metric

RH Bars use LH components

Most bars available with coolant port
(ie: Add CP to end of description)

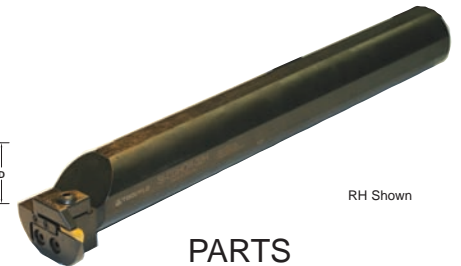

RH Shown

PARTS

Description	EDP Code	Insert	D	L	W	V	F	Min. Bore	D.O.C. at Min. Bore	Anvil	Anvil Screw	Clamp	Clamp Screw	Stop Block	SBH Screw
SI-CDHOR-50MM	96815000	V84/V85	50,0	400,0	5,5-6,5	7,9	39,5	76,2	2,0	AHL/R-148	SF95	CHL/R-482	SB90	SBH-1	SS-20
		V84/V85			60°V	7,9	39,5	76,2	2,0	AHL/R-173	SF95	CHL/R-431	SB90	SBH-1	SS-20
		DBP34/VDB188			4,3-4,8	20,6	40,0	76,2	6,0	AHL/R-138	SF95	CHL/R-382	SB90	SBH-2	SS-20
		VDB250A			5,5-6,5	20,6	40,0	76,2	6,0	AHL/R-148	SF95	CHL/R-482	SB90	SBH-2	SS-20
		DBP45/VDB250B			5,5-6,5	20,6	40,0	76,2	6,0	AHL/R-248	SF95	CHL/R-482	SB90	SBH-2	SS-20


INTERNAL BAR

SI-CDHOR/L

One piece design

Metric

Most bars available with coolant port
(ie: Add CP to end of description)



RH Shown


PARTS

Description	EDP Code	Insert	Min. Bore	D	L	F	V	D.O.C. at Min. Bore	Clamp Screw	Clamp
SI-CDHOR-25M8	96812582	V84/V85	30,15	25,0	250,0	17,4	6,4	4,8	S526	CBL-84
SI-CDHOL-25M8	96712582	V84/V85	30,15	25,0	250,0	17,4	6,4	4,8	S526	CBR-84
SI-CDHOR-32M8	96813282	V84/V85	38,1	32,0	300,0	18,5	6,4	4,8	S526	CBL-84
SI-CDHOL-32M8	96713282	V84/V85	38,1	32,0	300,0	18,5	6,4	4,8	S526	CBR-84
SI-CDHOR-50M9	96815086	V98	63,5	50,0	400,0	38,8	9,2	7,9	SS110	CBL-98
SI-CDHOL-50M9	96715086	V98	63,5	50,0	400,0	38,8	9,2	7,9	SS110	CBR-98
SI-CDHOR-65M9	96816586	V98	76,2	65,0	400,0	40,0	9,2	9,5	SS110	CBL-98
SI-CDHOL-65M12	96816590	V120	76,2	65,0	400,0	40,0	14,0	12,7	SB100	CBL-120




VEE BOTTOM

ACME THREADING MLPE




Description	EDP Code	TPI	W	T	L	H	GP22	TIN Coated	AC22	AITIN Coated
MLPE 2532 NT 4P	0271040	4	.0875	.188	.500	.150	●	●	●	●
MLPE 3425 NT 4P	0273040	4	.0875	.250	.625	.188	●	●	●	●
MLPE 2532 NT 5P	0271050	5	.0689	.188	.500	.150	●	●	●	●
MLPE 3425 NT 5P	0273050	5	.0689	.250	.625	.188	●	●	●	●
MLPE 2532 NT 6P	0271060	6	.0566	.188	.500	.150	●	●	●	●
MLPE 3425 NT 6P	0273060	6	.0566	.250	.625	.188	●	●	●	●
MLPE 2532 NT 8P	0271080	8	.0411	.188	.500	.150	●	●	●	●
MLPE 3425 NT 8P	0273080	8	.0411	.250	.625	.188	●	●	●	●
MLPE 2532 NT 10P	0271100	10	.0319	.188	.500	.150	●	●	●	●
MLPE 3425 NT 10P	0273100	10	.0319	.250	.625	.188	●	●	●	●
MLPE 2532 NT 12P	0271120	12	.0283	.188	.500	.150	●	●	●	●
MLPE 3425 NT 12P	0273120	12	.0283	.250	.625	.188	●	●	●	●

ACME STUB THREADING MLPE




Description	EDP Code	TPI	W	T	L	H	GP22	AC22
MLPE 2532 NT 4P STUB	0271041	4	.1004	.188	.500	.150	●	●
MLPE 3425 NT 4P STUB	0273041	4	.1004	.250	.625	.188	●	●
MLPE 2532 NT 5P STUB	0271051	5	.0793	.188	.500	.150	●	●
MLPE 3425 NT 5P STUB	0273051	5	.0793	.250	.625	.188	●	●
MLPE 2532 NT 6P STUB	0271061	6	.0652	.188	.500	.150	●	●
MLPE 3425 NT 6P STUB	0273061	6	.0652	.250	.625	.188	●	●
MLPE 2532 NT 8P STUB	0271081	8	.0476	.188	.500	.150	●	●
MLPE 3425 NT 8P STUB	0273081	8	.0476	.250	.625	.188	●	●
MLPE 2532 NT 10P STUB	0271101	10	.0370	.188	.500	.150	●	●
MLPE 3425 NT 10P STUB	0273101	10	.0370	.250	.625	.188	●	●
MLPE 2532 NT 12P STUB	0271121	12	.0326	.188	.500	.150	●	●
MLPE 3425 NT 12P STUB	0273121	12	.0326	.250	.625	.188	●	●

V-THREADING - 60° MLPE



Description	EDP Code	TPI	F	T	L	H	GP22	GP4
MLPE 1251 NV	01720000	10-20	.002-.004	.160	.340	.115	●	●
MLPE 2532 NV	01710000	6-20	.002-.004	.188	.500	.150	●	●
MLPE 3425 NV	01730000	5-20	.003-.006	.250	.625	.188	●	●

GROOVING MLPE

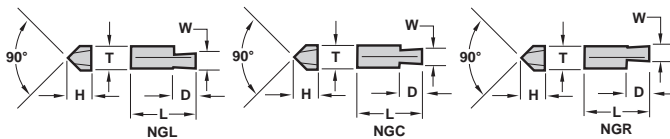

Description	EDP Code	W	D	T	L	H	Uncoated		TIN Coated		AITIN Coated	
							C3	C6H	GP22	GP6	AC22	AC6
MLPE 1251 NGC W.062	C7206200	.062	.085	.160	.340	.115			●		●	
MLPE 1251 NGC W.094	C7209400	.094	.085	.160	.340	.115			●		●	
MLPE 1251 NGC W.125	C7212500	.125	.085	.160	.340	.115			●		●	
MLPE 1251 NGC W.156	C7215600	.156	.085	.160	.340	.115			●		●	
MLPE 2532 NGC W.062	C7106200	.062	.120	.188	.500	.150			●		●	
MLPE 2532 NGC W.094	C7109400	.094	.150	.188	.500	.150			●		●	
MLPE 2532 NGC W.125	C7112500	.125	.150	.188	.500	.150			●		●	
MLPE 2532 NGC W.156	C7115600	.156	.150	.188	.500	.150			●		●	
MLPE 2532 NGC W.188	C7118800	.188	.150	.188	.500	.150			●		●	
MLPE 3425 NGC W.062	C7306200	.062	.120	.250	.625	.188			●		●	
MLPE 3425 NGC W.094	C7309400	.094	.150	.250	.625	.188			●		●	
MLPE 3425 NGC W.125	C7312500	.125	.150	.250	.625	.188			●		●	
MLPE 3425 NGC W.156	C7315600	.156	.150	.250	.625	.188			●		●	
MLPE 3425 NGC W.188	C7318800	.188	.150	.250	.625	.188			●		●	
MLPE 3425 NGC W.250	C7325000	.250	.150	.250	.625	.188			●		●	
MLPE 1251 NGL W.125	L7212500	.125	.085	.160	.340	.115			●		●	
MLPE 1251 NGL W.156	L7215600	.156	.085	.160	.340	.115			●		●	
MLPE 2532 NGL W.125	L7112500	.125	.150	.188	.500	.150			●		●	
MLPE 2532 NGL W.156	L7115600	.156	.150	.188	.500	.150			●		●	
MLPE 3425 NGL W.188	L7318800	.188	.150	.250	.625	.188			●		●	
MLPE 1251 NGR W.125	R7212500	.125	.085	.160	.340	.115			●		●	
MLPE 1251 NGR W.156	R7215600	.156	.085	.160	.340	.115			●		●	
MLPE 2532 NGR W.125	R7112500	.125	.150	.188	.500	.150			●		●	
MLPE 2532 NGR W.156	R7115600	.156	.150	.188	.500	.150			●		●	
MLPE 3425 NGR W.188	R7318800	.188	.150	.250	.625	.188			●		●	

In an effort to improve our stock standard grade offering, there are periodic changes. Please see current price list for up to date grade offering.

- High performance choice in optimal conditions.
- ▲ Recommended grade under general conditions.

Cast Iron	●				
Non-Ferrous	●				
Stainless/High Temp	●				
Steel		▲	▲		●

VEE BOTTOM




INTERNAL BAR

MS-CDHOR/L

One piece design

■ RH Bars use RH clamps

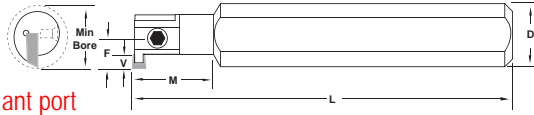

RH Shown


Most bars available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	Min. Bore	D	M	L	F	V	Clamp Screw	Clamp
MS-CLHOR-46254	951546254	MLPE 1251	.500	.500	.930	6.000	.265	.079	SF20	MCR-30
MS-CLHOL-46254	951346254	MLPE 1251	.500	.500	.930	6.000	.265	.079	SF20	MCL-30
MS-CLHOR-6845	95156845	MLPE 2532	.700	.750	1.250	8.000	.400	.150	SF47	MCR-40
MS-CLHOL-6845	95256845	MLPE 2532	.700	.750	1.250	8.000	.400	.150	SF47	MCL-40
MS-CLHOR-6856	95156856	MLPE 3425	.830	.750	1.500	8.000	.462	.150	SA4	MCR-50
MS-CLHOL-6856	95256856	MLPE 3425	.830	.750	1.500	8.000	.462	.150	SA4	MCL-50
MS-CLHOR-8856	95158856	MLPE 3425	.830	1.000	1.500	8.000	.462	.150	SA4	MCR-50
MS-CLHOL-8856	95258856	MLPE 3425	.830	1.000	1.500	8.000	.462	.150	SA4	MCL-50

INTERCHANGEABLE HEADS

H-CDHOR/L*



RH SHOWN


Most holders available with coolant port
(ie: Add CP to end of description)

PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore	Clamp	Clamp Screw
H16-CDHOR-8	9IH6801682	V84/V85	1.000	1.625	0.925	1.525	CBL-84	S-526
H20-CDHOR-8	9IH6802082	V84/V85	1.250	1.625	0.875	1.600	CBL-84	S-526
H24-CDHOR-8	9IH6802482	V84/V85	1.500	1.625	1.000	1.850	CBL-84	S-526
H32-MTHOR-8	9IH6803282	V84/V85	2.000	1.625	1.285	2.385	CBL-84	S-526
H40-MTHOR-8	9IH6804082	V84/V85	2.500	1.625	1.500	2.850	CBL-84	S-526
H32-MTHOR-9	9IH6803286	V96/V98	2.000	1.625	1.410	2.510	CBL-98	SS110
H40-MTHOR-9	9IH6804086	V96/V98	2.500	1.625	1.584	2.935	CBL-98	SS110
H40-MTHOR-12	9IH6804092	V120	2.500	1.625	1.820	3.170	CBL-120	SB100

*Left hand quoted on request.

HS-CDHOR/L*

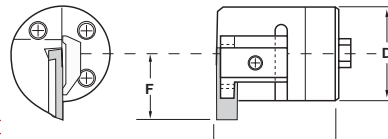

RH SHOWN

Most holders available with coolant port
(ie: Add CP to end of description)


PARTS

Description	EDP Code	Insert	d	C	F	Min. Bore	Clamp	Clamp Screw
HS25-CDHOR-8	9IHS68025M82	V84/V85	0.984	1.355	0.925	1.517	CBL-84	S-526
HS32-CDHOR-8	9IHS68032M82	V84/V85	1.260	1.625	0.875	1.600	CBL-84	S-526
HS40-CDHOR-8	9IHS68040M82	V84/V85	1.575	1.625	1.084	1.971	CBL-84	S-526
HS50-MTHOR-8	9IHS68050M82	V84/V85	1.970	1.625	1.281	2.366	CBL-84	S-526
HS60-MTHOR-8	9IHS68060M82	V84/V85	2.360	1.625	1.476	2.756	CBL-84	S-526
HS50-MTHOR-9	9IHS68050M86	V96/V98	1.970	1.625	1.362	2.447	CBL-98	SS110
HS60-MTHOR-9	9IHS68060M86	V96/V98	2.360	1.625	1.558	2.838	CBL-98	SS110
HS60-MTHOR-12	9IHS68060M92	V120	2.360	1.625	1.750	3.030	CBL-120	SB100

*Left hand quoted on request.



TOOL FLO

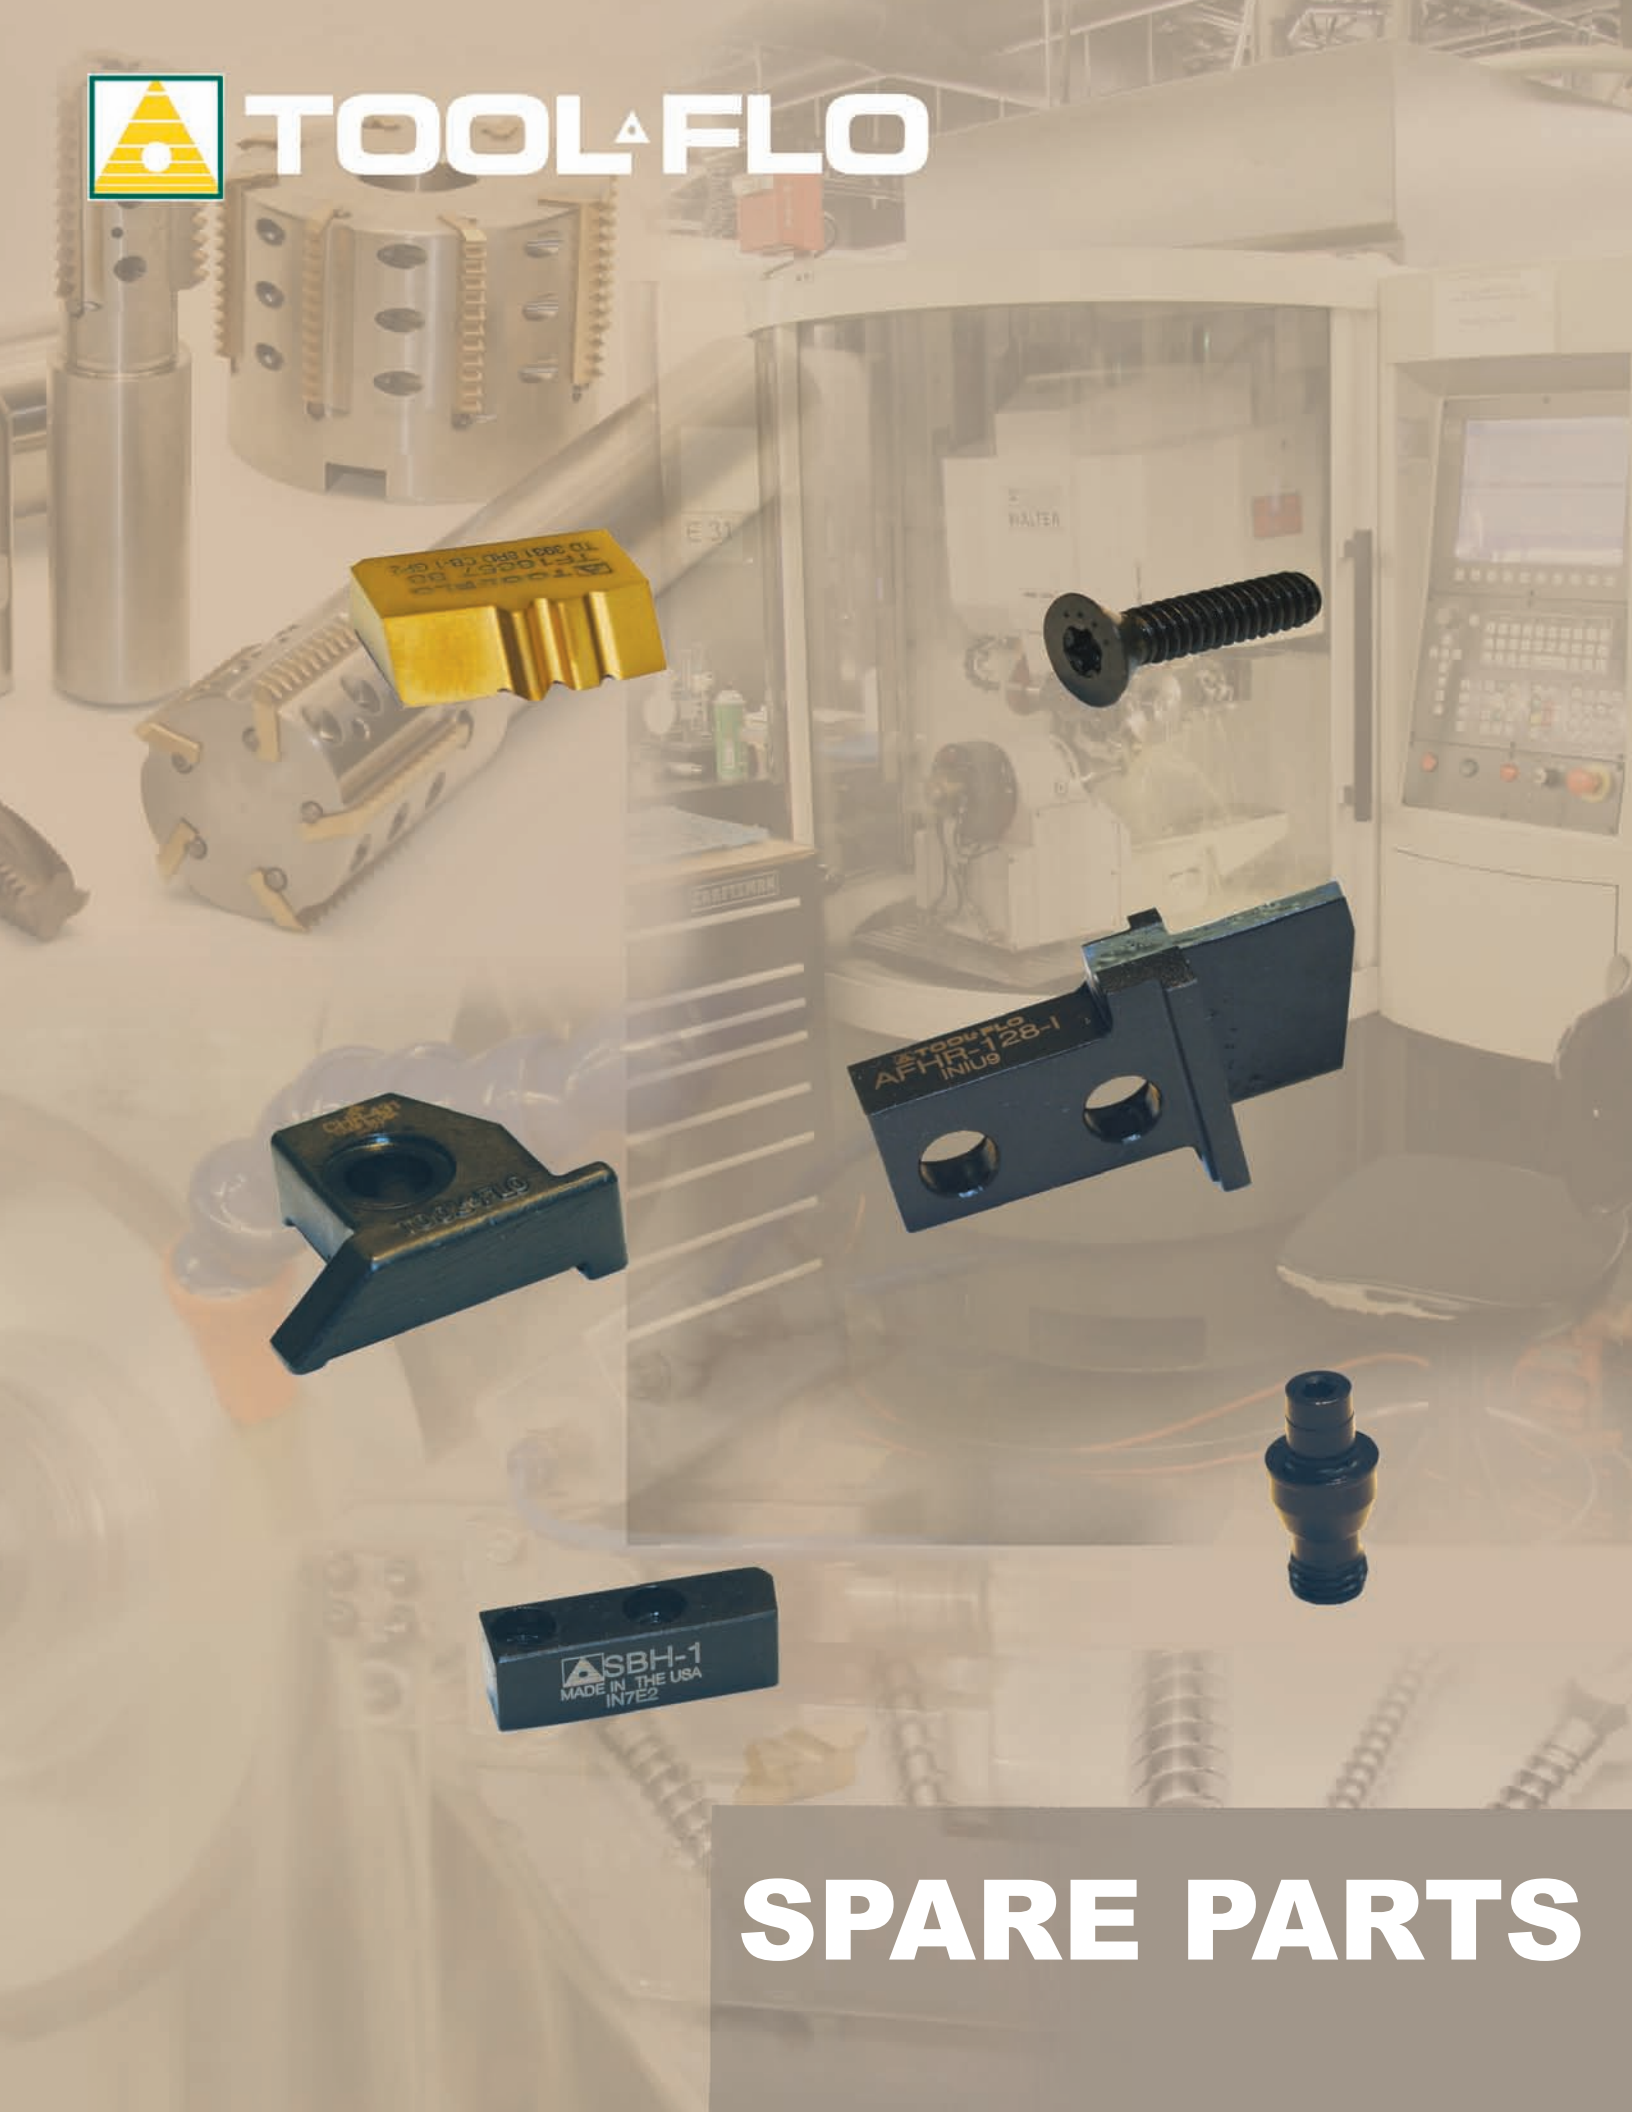

SPARE PARTS

SPARE PARTS



	Description	D.O.C.	W.O.C.	Insert		Description	D.O.C.	W.O.C.	Insert		
ANVILS Deep Grooving 	DGAHL-113	1.250	.105-.125	VDG	CLAMPS Internal 	CBL-84			V84/V85		
	DGAHR-113	1.250	.105-.125	VDG		CBR-84			V84/V85		
	DGAHL-138	1.375	.170-.188	VDG		CBL-98			V98		
	DGAHR-138	1.375	.170-.188	VDG		CBR-98			V98		
	DGAHL-248	1.500	.218-.250	VDG		CBL-120			V120		
	DGAHR-248	1.500	.218-.250	VDG		CBR-120			V120		
	DGAHL-258	1.500	.250-.312	VDG		CBL-132	.312	.105-.125	DBP/VDB		
	DGAHR-258	1.500	.250-.312	VDG		CBR-132	.312	.105-.125	DBP/VDB		
	DGAHL-268	1.750	.350-.375	VDG		CBL-411	.180	.188-.250	V84		
	DGAHR-268	1.750	.350-.375	VDG		CBR-411	.180	.188-.250	V84		
Face Grooving 	AFHL-113-I	.312	.105-.125	DBP/VDB	External 	CHL-98			V98		
	AFHL-113-O	.312	.105-.125	DBP/VDB		CHR-98			V98		
	AFHR-113-I	.312	.105-.125	DBP/VDB		CHL-120			V120		
	AFHR-113-O	.312	.105-.125	DBP/VDB		CHR-120			V120		
	AFHL-128-I	.812	.105-.125	DBP/VDB		CHL-132	.312	.105-.125	DBP/VDB		
	AFHL-128-O	.812	.105-.125	DBP/VDB		CHR-132	.312	.105-.125	DBP/VDB		
	AFHR-128-I	.812	.105-.125	DBP/VDB		CHL-382	.812	.170-.188	DBP/VDB		
	AFHR-128-O	.812	.105-.125	DBP/VDB		CHR-382	.812	.170-.188	DBP/VDB		
	AFHL-138-I	.812	.170-.188	DBP/VDB		CHL-431	.312	.220-.312	V84/V85		
	AFHL-138-O	.812	.170-.188	DBP/VDB		CHR-431	.312	.220-.312	V84/V85		
	AFHR-138-I	.812	.170-.188	DBP/VDB		CHL-452					
	AFHR-138-O	.812	.170-.188	DBP/VDB		CHR-452					
	AFHL-148-I	.812	.220-.250	DBP/VDB		CHL-482	.812	.220-.312	DBP/VDB		
	AFHL-148-O	.812	.220-.250	DBP/VDB		CHR-482	.812	.220-.312	DBP/VDB		
	AFHR-148-I	.812	.220-.250	DBP/VDB		CHL-582	.812	.350-.375	DBP/VDB		
	AFHR-148-O	.812	.220-.250	DBP/VDB		CHR-582	.812	.350-.375	DBP/VDB		
	Grooving/Threading Internal 	ABL-113	.312	.105-.125		DBP/VDB	Face Grooving 	CHLF-132I	.312	.105-.125	DBP/VDB
		ABR-113	.312	.105-.125		DBP/VDB		CHLF-132O	.312	.105-.125	DBP/VDB
ABL-131		.180	.188-.250	V84	CHRF-132I	.312		.105-.125	DBP/VDB		
ABR-131		.180	.188-.250	V84	CHRF-132O	.312		.105-.125	DBP/VDB		
ABL-135		.530	.170-.188	DBP/VDB	CHLF-282I	.812		.105-.125	DBP/VDB		
ABR-135		.530	.170-.188	DBP/VDB	CHLF-282O	.812		.105-.125	DBP/VDB		
ABL-143		.312	.295-.312	V85	CHRF-282I	.812		.105-.125	DBP/VDB		
ABR-143		.312	.295-.312	V85	CHRF-282O	.812		.105-.125	DBP/VDB		
ABL-145		.530	.220-.250	VDB 250A	CHLF-382I	.812		.170-.188	DBP/VDB		
ABR-145		.530	.220-.250	VDB 250A	CHLF-382O	.812		.170-.188	DBP/VDB		
ABL-171		.180	60° V	V84	CHRF-382I	.812		.170-.188	DBP/VDB		
ABR-171		.180	60° V	V84	CHRF-382O	.812		.170-.188	DBP/VDB		
ABL-245		.530	.220-.250	DBP/VDB	CHLF-482I	.812		.220-.312	DBP/VDB		
ABR-245		.530	.220-.250	DBP/VDB	CHLF-482O	.812		.220-.312	DBP/VDB		
ABL-345		.530	.220-.250	VDB250A	CHRF-482I	.812		.220-.312	DBP/VDB		
ABR-345		.530	.220-.250	VDB250A	CHRF-482O	.812		.220-.312	DBP/VDB		
External 		AHL-113	.312	.105-.125	VDB	Chipbreakers External 		CK-21			Length .73
		AHR-113	.312	.105-.125	VDB			CL-6			.58
	AHL-138	.812	.170-.188	VDB	CL-7				.64		
	AHR-138	.812	.170-.188	VDB	CL-9				.75		
	AHL-148	.812	.220-.250	VDB	CL-12				.88		
	AHR-148	.812	.220-.250	VDB	CL-20				.73		
	AHL-173	.812	V-THD	V84/V85	CL-22				.85		
	AHR-173	.812	V-THD	V84/V85	CL-24				1.000		
	AHL-248	.812	.250-.312	VDB250B	CL-30				1.000		
	AHR-248	.812	.250-.312	VDB250B	Chipbreakers Internal 		CM-65		FLPL/R-33		
	AHL-268	.812	.350-.375	VDB375			CM-66		FLPL/R-33		
	AHR-268	.812	.350-.375	VDB375			CM-68		FLPR-5		
	AVR-FC094	.500	.094	FC-094			CM-71		FLPL-5		
	AVR-FC125	.800	.125	FC-125			CM-79		FLPR-5		
	AVR-FC187	.800	.187	FC-187			CM-81		FL-5L		
	AVL-FC094	.500	.094	FC-094			CM-111		FLPR-5		
	AVL-FC125	.800	.125	FC-125			CM-112		FLPL-5		
	AVL-FC187	.800	.187	FC-187			CM-113		VPGR (RH HOLDER)		
				CM-114			VPGR (LH HOLDER)				
				CM-116			DPGR (RH HOLDER)				
				CM-117			DPGR (LH HOLDER)				
				CM-118			DPGR (RH BAR)				
				CM-119			DPGR (LH BAR)				
				CM-121			Replaced with TF-121				
				CM-143							
				CM-180			FLPR-5				
				CM-181			FLPL-5				

SPARE PARTS



SPARE PARTS














CLAMPS (cont.)					Flat Head Cap Screw					
Description	D.O.C.	W.O.C.	Insert		Description	Threads	Length	Wrench		
	DGCHL-132	1.250	.105-.125	VDG	S-111 (SF-20)	4-40	3/8	T-9 TORX		
	DGCHR-132	1.250	.105-.125	VDG	SA3	5-40	1/2	T-10 TORX		
	DGCHL-382	1.375	.170-.188	VDG	SA4	8-32	5/8	T-20 TORX		
	DGCHR-382	1.375	.170-.188	VDG	SA5	10-32	5/8	T-25 TORX		
	DGCHL-482	1.500	.218-.250	VDG	SF10	4-40	1/4	T-9 TORX		
	DGCHR-482	1.500	.218-.250	VDG	SF20 (S-111)	4-40	3/8	T-10 TORX		
	DGCHL-500	1.500	.250-.312	VDG	SF25	4-40	1/2	T-9 TORX		
	DGCHR-500	1.500	.250-.312	VDG	SF30	5-40	3/8	T-10 TORX		
	DGCHL-582	1.750	.350-.375	VDG	SF40	5-40	1/2	T-10 TORX		
	DGCHR-582	1.750	.350-.375	VDG	SF42	5-40	5/8	T-10 TORX		
	Description		Insert							
	MCL-30		MLPE-1251							
	MCR-30		MLPE-1251							
	MCL-40		MLPE-2532							
	MCR-40		MLPE-2532							
	MCL-50		MLPE-3425							
MCR-50		MLPE-3425								
	Description		Length							
	TC-190		.530							
	TC-191		.640							
	TC-250		.730							
	TC-251		.850							
	TC-310		.750							
	TC-311		.880							
	TC-380		1.000							
	Description		Insert							
TF-72		FL-3R/4R								
TF-73		FL-3L/4L								
TF-74		FL-2R								
TF-75		FL-2L								
TF-77*		FL-4L*								
TF-78*		FL-4R*								
TF-80		FL-5R								
TF-81		FL-5L								
TF-120		FL-6R								
TF-121		FL-6L								
	Description		DIA	L						
	DP-1		1/8	1						
	DP-2		1/8	1-1/2						
	DP-3		1/4	3/8						
	DP-4		3/16	3/8						
	DP-5		3/32	3/16						
	DP-6		1/4	1						
	DP-7		4,0	10,0						
	DP-8		4,0	8,0						
	DP-9		1/4	1/2						
	DP-10		1/4	3/4						
	DP-11		3/16	5/8						
	DP-135		1/8	1-3/8						
	Description		Threads	Length	Wrench					
	NL-33		1/4-20	.340	5-64 HEX					
	NL-33L		1/4-20	.410	5-64 HEX					
	NL-34		1/4-20	.450	5-64 HEX					
	NL-34L		1/4-20	.510	5-64 HEX					
	NL-44		1/4-28	.510	3/32 HEX					
	NL-46		1/4-28	.680	3/32 HEX					
	NL-46L		1/4-28	.730	3/32 HEX					
	NL-56		5/16-24	.690	1/8 HEX					
	NL-57		5/16-24	.810	1/8 HEX					
	NL-58		5/16-24	.860	1/8 HEX					
	NL-66		3/8-24	.690	9/64 HEX					
	NL-66L		3/8-24	.830	9/64 HEX					
	NL-68		3/8-24	.860	9/64 HEX					
	NL-68L		3/8-24	.950	9/64 HEX					
	NL-810		7/16-20	1.170	5/32 HEX					
		Description		Wrench						
		STBN-1A		K2						
		STBN-2		K3						
		STBN-3		K3						
STBN-4			K3							
STBN-5			K3							
STBN-6			K4							
STBN-7			K5							
STBN-8			K6							
STBN-9			K7							
STBN-10		K8								
	Description		Threads	Length	Wrench					
	SB10		4-40	1/4	1/16 HEX					
	SB90		5/16-18	3/4	3/16 HEX					
	SB100		5/16-18	1	3/16 HEX					
	S-518		8-32	3/8	3/32 HEX					
	S-524		10-24	1/2	1/8 HEX					
	S-532		1/4-20	3/4	5/32 HEX					
	S-625		1/4-28	7/8	5/32 HEX					
	Description		Threads	Length	Wrench					
	STC-4		5-16-24	1.160	5/32HEX					
	STC-5		10-32	.840	3/32 HEX					
	STC-8		5/16-24	1.000	5/32HEX					
	STC-9		10-32	.590	3/32 HEX					
	STC-11		1/4-28	.810	1/8HEX					
	Description		Threads	Length	Wrench					
	SD1		6-40	1/2	T-10 TORX					
	SD2		10-32	3/4	T-20 TORX					
	SD3		10-32	3/4	T-20 TORX					
	SD4		1/4-20	1-1/4	1/8 HEX					
	SD-25									
		Description		Threads	Length	Wrench				
		S-310		6-32	1/2	7/64 HEX				
		S-312		6-32	3/4	7/64 HEX				
		S-352 (SS90)		5/16-18	1	1/4 HEX				
		S-412		10-32	3/4	5/32 HEX				
		S-532								
		SS10		4-40	1/4	3/32 HEX				
		SS20		4-40	3/8	3/32 HEX				
		SS25		5-40	1/4	3/32HEX				
SS30			5-40	3/8	3/32HEX					
SS40			5-40	1/2	3/32HEX					
SS45			5-40	3/4	3/32HEX					
SS50			8-32	3/8	9/64 HEX					
SS60			8-32	1/2	9/64 HEX					
SS65			8-32	5/8	9/64 HEX					
SS70		10-24	3/8	5/32 HEX						
SS80		10-24	1/2	5/32 HEX						
SS-84M										
SS85		10-24	5/8	5/32 HEX						
SS87		10-24	7/8	5/32 HEX						
SS90 (S-352)		5/16-18	1	1/4 HEX						
SS-91										
SS100		1/4-20	3/4	5/32 HEX						
	Description		Threads	Length	Wrench					
	SY-3		5-40	1/4	T-10 TORX					
	SY-4		8-32	3/8	T-20 TORX					
SY-5		M5 x 0.8	1/4	T-25 TORX						
	Description		Threads	Length	Wrench					
	SL-111		4-40	5/16	-					
	SL-344		2-56	1/4	-					
S-959										
	Description		Threads	Length	Wrench					
	TS1		1-72	3/32	T-6 TORX					
	TS20		1-72	3/32	T-6 TORX					
	TS25		M2.5 x 0.45	5.5MM	T-8 TORX					
	TS250		M2.5 x 0.45	4,8MM	T-8 TORX					
	TS252 (SF05)		M2.5 x 0.45	8,0MM	T-8 TORX					
	TS3		2-56	1/8	T-7 TORX					
	TS40		5-40	3/8	T-10 TORX					
	TS45		4-40	5/16	T-9 TORX					
	TS6		4-40	13/64	T-10 TORX					
TS60		8-32	1/2	T-20 TORX						
TS65		10-32	1/2	T-20 TORX						
	Description		Insert							
	TF1207		CR-8R-3E/4E							
	TF1780		CR-8R-3I/4I							
	TF3218		CR-8R-7I							
	TF8132-E		CR-5B75-4E							
	TF8132-I		CR-5B75-4I							

*Designed for Sandvik® Toolholders & Bars.

SPARE PARTS

SPARE PARTS



	Description	Length	Description																																																																																																																																																																																																																																																											
SEATS (cont.) Flo-Lock Style  	SM-267	FLPL-33	STOP BLOCKS   																																																																																																																																																																																																																																																											
	SM-268	FLPR-33																																																																																																																																																																																																																																																												
	SM-271	FLPL-13																																																																																																																																																																																																																																																												
	SM-272	FLPR-13																																																																																																																																																																																																																																																												
	SM-285	FLPR-5																																																																																																																																																																																																																																																												
	SM-286	FLPL-5																																																																																																																																																																																																																																																												
	SM-412	VPGR																																																																																																																																																																																																																																																												
	SM-414	DPGR																																																																																																																																																																																																																																																												
	SM-416	FL-6																																																																																																																																																																																																																																																												
	SM-420	FL-4																																																																																																																																																																																																																																																												
Laydown L Style  	LS 43 NO FORM EXT	L43 EXT	WRENCHES Flag Style Torx  																																																																																																																																																																																																																																																											
	LS 43 NO FORM INT	L43 INT																																																																																																																																																																																																																																																												
	LS 53 NO FORM EXT	L53 EXT																																																																																																																																																																																																																																																												
	LS 53 NO FORM INT	L53 INT																																																																																																																																																																																																																																																												
	LS 43 API EXT	L43 API EXT																																																																																																																																																																																																																																																												
	LS 43 API INT	L43 API INT																																																																																																																																																																																																																																																												
	LS 53 API EXT	L53 API EXT																																																																																																																																																																																																																																																												
LS 53 API INT	L53 API INT																																																																																																																																																																																																																																																													
Laydown LT Style  	<table border="1"> <thead> <tr> <th>Description</th> <th>Angle*</th> <th>Insert</th> </tr> </thead> <tbody> <tr><td>YE3 3N</td><td>-1.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3 2N</td><td>-0.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3 1.5N</td><td>0°</td><td>16ER/16NL</td></tr> <tr><td>YE3 1N</td><td>0.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3</td><td>1.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3 1P</td><td>2.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3 2P</td><td>3.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3 3P</td><td>4.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3M NO FORM</td><td>1.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3M 1N</td><td>0.5°</td><td>16ER/16NL</td></tr> <tr><td>YE3M 1.5N</td><td>0°</td><td>16ER/16NL</td></tr> <tr><td>YE3M 2N</td><td>-0.5°</td><td>16ER/16NL</td></tr> <tr><td>YE4 3N</td><td>-1.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4 2N</td><td>-0.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4 1.5N</td><td>0°</td><td>22ER/22NL</td></tr> <tr><td>YE4 1N</td><td>0.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4</td><td>1.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4 1P</td><td>2.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4 2P</td><td>3.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4 3P</td><td>4.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4M NO FORM</td><td>1.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4M 1N</td><td>0.5°</td><td>22ER/22NL</td></tr> <tr><td>YE4M 1.5N</td><td>0°</td><td>22ER/22NL</td></tr> <tr><td>YE4M 2N</td><td>-0.5°</td><td>22ER/22NL</td></tr> <tr><td>YE5 3N</td><td>-1.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 2N</td><td>-0.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 1.5N</td><td>0°</td><td>27ER/27NL</td></tr> <tr><td>YE5 1N</td><td>0.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5</td><td>1.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 1P</td><td>2.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 2P</td><td>3.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 3P</td><td>4.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5 8NPT 2M</td><td>1.5°</td><td>27ER/NL 8NPT 2M</td></tr> <tr><td>YE5 8RD 2M</td><td>1.5°</td><td>27ER/NL 8RD 2M</td></tr> <tr><td>YE5M NO FORM</td><td>1.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5M 1N</td><td>0.5°</td><td>27ER/27NL</td></tr> <tr><td>YE5M 1.5N</td><td>0°</td><td>27ER/27NL</td></tr> <tr><td>YI3 3N</td><td>-1.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3 2N</td><td>-0.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3 1.5N</td><td>0°</td><td>16NR/16EL</td></tr> <tr><td>YI3 1N</td><td>0.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3</td><td>1.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3 1P</td><td>2.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3 2P</td><td>3.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3 3P</td><td>4.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3M NO FORM</td><td>1.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3M 1N</td><td>0.5°</td><td>16NR/16EL</td></tr> <tr><td>YI3M 1.5N</td><td>0°</td><td>16NR/16EL</td></tr> <tr><td>YI3M 2N</td><td>-0.5°</td><td>16NR/16EL</td></tr> <tr><td>YI4 3N</td><td>-1.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4 2N</td><td>-0.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4 1.5N</td><td>0°</td><td>22NR/22EL</td></tr> <tr><td>YI4 1N</td><td>0.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4</td><td>1.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4 1P</td><td>2.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4 2P</td><td>3.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4 3P</td><td>4.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4M NO FORM</td><td>1.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4M 1N</td><td>0.5°</td><td>22NR/22EL</td></tr> <tr><td>YI4M 1.5N</td><td>0°</td><td>22NR/22EL</td></tr> <tr><td>YI4M 2N</td><td>-0.5°</td><td>22NR/22EL</td></tr> <tr><td>YI5 3N</td><td>-1.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 2N</td><td>-0.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 1.5N</td><td>0°</td><td>27NR/27EL</td></tr> <tr><td>YI5 1N</td><td>0.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5</td><td>1.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 1P</td><td>2.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 2P</td><td>3.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 3P</td><td>4.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5 8NPT 2M</td><td>1.5°</td><td>27NR/EL 8NPT 2M</td></tr> <tr><td>YI5 8RD 2M</td><td>1.5°</td><td>27NR/EL 8RD 2M</td></tr> <tr><td>YI5M NO FORM</td><td>1.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5M 1N</td><td>0.5°</td><td>27NR/27EL</td></tr> <tr><td>YI5M 1.5N</td><td>0°</td><td>27NR/27EL</td></tr> </tbody> </table>	Description	Angle*	Insert	YE3 3N	-1.5°	16ER/16NL	YE3 2N	-0.5°	16ER/16NL	YE3 1.5N	0°	16ER/16NL	YE3 1N	0.5°	16ER/16NL	YE3	1.5°	16ER/16NL	YE3 1P	2.5°	16ER/16NL	YE3 2P	3.5°	16ER/16NL	YE3 3P	4.5°	16ER/16NL	YE3M NO FORM	1.5°	16ER/16NL	YE3M 1N	0.5°	16ER/16NL	YE3M 1.5N	0°	16ER/16NL	YE3M 2N	-0.5°	16ER/16NL	YE4 3N	-1.5°	22ER/22NL	YE4 2N	-0.5°	22ER/22NL	YE4 1.5N	0°	22ER/22NL	YE4 1N	0.5°	22ER/22NL	YE4	1.5°	22ER/22NL	YE4 1P	2.5°	22ER/22NL	YE4 2P	3.5°	22ER/22NL	YE4 3P	4.5°	22ER/22NL	YE4M NO FORM	1.5°	22ER/22NL	YE4M 1N	0.5°	22ER/22NL	YE4M 1.5N	0°	22ER/22NL	YE4M 2N	-0.5°	22ER/22NL	YE5 3N	-1.5°	27ER/27NL	YE5 2N	-0.5°	27ER/27NL	YE5 1.5N	0°	27ER/27NL	YE5 1N	0.5°	27ER/27NL	YE5	1.5°	27ER/27NL	YE5 1P	2.5°	27ER/27NL	YE5 2P	3.5°	27ER/27NL	YE5 3P	4.5°	27ER/27NL	YE5 8NPT 2M	1.5°	27ER/NL 8NPT 2M	YE5 8RD 2M	1.5°	27ER/NL 8RD 2M	YE5M NO FORM	1.5°	27ER/27NL	YE5M 1N	0.5°	27ER/27NL	YE5M 1.5N	0°	27ER/27NL	YI3 3N	-1.5°	16NR/16EL	YI3 2N	-0.5°	16NR/16EL	YI3 1.5N	0°	16NR/16EL	YI3 1N	0.5°	16NR/16EL	YI3	1.5°	16NR/16EL	YI3 1P	2.5°	16NR/16EL	YI3 2P	3.5°	16NR/16EL	YI3 3P	4.5°	16NR/16EL	YI3M NO FORM	1.5°	16NR/16EL	YI3M 1N	0.5°	16NR/16EL	YI3M 1.5N	0°	16NR/16EL	YI3M 2N	-0.5°	16NR/16EL	YI4 3N	-1.5°	22NR/22EL	YI4 2N	-0.5°	22NR/22EL	YI4 1.5N	0°	22NR/22EL	YI4 1N	0.5°	22NR/22EL	YI4	1.5°	22NR/22EL	YI4 1P	2.5°	22NR/22EL	YI4 2P	3.5°	22NR/22EL	YI4 3P	4.5°	22NR/22EL	YI4M NO FORM	1.5°	22NR/22EL	YI4M 1N	0.5°	22NR/22EL	YI4M 1.5N	0°	22NR/22EL	YI4M 2N	-0.5°	22NR/22EL	YI5 3N	-1.5°	27NR/27EL	YI5 2N	-0.5°	27NR/27EL	YI5 1.5N	0°	27NR/27EL	YI5 1N	0.5°	27NR/27EL	YI5	1.5°	27NR/27EL	YI5 1P	2.5°	27NR/27EL	YI5 2P	3.5°	27NR/27EL	YI5 3P	4.5°	27NR/27EL	YI5 8NPT 2M	1.5°	27NR/EL 8NPT 2M	YI5 8RD 2M	1.5°	27NR/EL 8RD 2M	YI5M NO FORM	1.5°	27NR/27EL	YI5M 1N	0.5°	27NR/27EL	YI5M 1.5N	0°	27NR/27EL		<table border="1"> <thead> <tr> <th>Description</th> <th>Wrench</th> </tr> </thead> <tbody> <tr><td>K05</td><td>T-6 TORX</td></tr> <tr><td>K1</td><td>T-7 TORX</td></tr> <tr><td>K2</td><td>T-8 TORX</td></tr> <tr><td>K3</td><td>T-10 TORX</td></tr> <tr><td>K4</td><td>T-20 TORX</td></tr> <tr><td>K5</td><td>T-25TORX</td></tr> <tr><td>K05L</td><td>T-6 TORX</td></tr> <tr><td>K2L</td><td>T-8 TORX</td></tr> <tr><td>K3L</td><td>T-10 TORX</td></tr> <tr><td>K35L</td><td>T-15TORX</td></tr> <tr><td>K4L</td><td>T-20 TORX</td></tr> <tr><td>K5L</td><td>T-25TORX</td></tr> </tbody> </table>	Description	Wrench	K05	T-6 TORX	K1	T-7 TORX	K2	T-8 TORX	K3	T-10 TORX	K4	T-20 TORX	K5	T-25TORX	K05L	T-6 TORX	K2L	T-8 TORX	K3L	T-10 TORX	K35L	T-15TORX	K4L	T-20 TORX	K5L	T-25TORX
	Description	Angle*	Insert																																																																																																																																																																																																																																																											
	YE3 3N	-1.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 2N	-0.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 1.5N	0°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 1N	0.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3	1.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 1P	2.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 2P	3.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3 3P	4.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3M NO FORM	1.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3M 1N	0.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3M 1.5N	0°	16ER/16NL																																																																																																																																																																																																																																																											
	YE3M 2N	-0.5°	16ER/16NL																																																																																																																																																																																																																																																											
	YE4 3N	-1.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 2N	-0.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 1.5N	0°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 1N	0.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4	1.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 1P	2.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 2P	3.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4 3P	4.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4M NO FORM	1.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4M 1N	0.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4M 1.5N	0°	22ER/22NL																																																																																																																																																																																																																																																											
	YE4M 2N	-0.5°	22ER/22NL																																																																																																																																																																																																																																																											
	YE5 3N	-1.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 2N	-0.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 1.5N	0°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 1N	0.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5	1.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 1P	2.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 2P	3.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 3P	4.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5 8NPT 2M	1.5°	27ER/NL 8NPT 2M																																																																																																																																																																																																																																																											
	YE5 8RD 2M	1.5°	27ER/NL 8RD 2M																																																																																																																																																																																																																																																											
	YE5M NO FORM	1.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5M 1N	0.5°	27ER/27NL																																																																																																																																																																																																																																																											
	YE5M 1.5N	0°	27ER/27NL																																																																																																																																																																																																																																																											
	YI3 3N	-1.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 2N	-0.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 1.5N	0°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 1N	0.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3	1.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 1P	2.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 2P	3.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3 3P	4.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3M NO FORM	1.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3M 1N	0.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3M 1.5N	0°	16NR/16EL																																																																																																																																																																																																																																																											
	YI3M 2N	-0.5°	16NR/16EL																																																																																																																																																																																																																																																											
	YI4 3N	-1.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 2N	-0.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 1.5N	0°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 1N	0.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4	1.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 1P	2.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 2P	3.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4 3P	4.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4M NO FORM	1.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4M 1N	0.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4M 1.5N	0°	22NR/22EL																																																																																																																																																																																																																																																											
	YI4M 2N	-0.5°	22NR/22EL																																																																																																																																																																																																																																																											
	YI5 3N	-1.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 2N	-0.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 1.5N	0°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 1N	0.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5	1.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 1P	2.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 2P	3.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 3P	4.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5 8NPT 2M	1.5°	27NR/EL 8NPT 2M																																																																																																																																																																																																																																																											
	YI5 8RD 2M	1.5°	27NR/EL 8RD 2M																																																																																																																																																																																																																																																											
	YI5M NO FORM	1.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5M 1N	0.5°	27NR/27EL																																																																																																																																																																																																																																																											
	YI5M 1.5N	0°	27NR/27EL																																																																																																																																																																																																																																																											
	Description	Wrench																																																																																																																																																																																																																																																												
	K05	T-6 TORX																																																																																																																																																																																																																																																												
	K1	T-7 TORX																																																																																																																																																																																																																																																												
	K2	T-8 TORX																																																																																																																																																																																																																																																												
	K3	T-10 TORX																																																																																																																																																																																																																																																												
	K4	T-20 TORX																																																																																																																																																																																																																																																												
	K5	T-25TORX																																																																																																																																																																																																																																																												
	K05L	T-6 TORX																																																																																																																																																																																																																																																												
	K2L	T-8 TORX																																																																																																																																																																																																																																																												
	K3L	T-10 TORX																																																																																																																																																																																																																																																												
	K35L	T-15TORX																																																																																																																																																																																																																																																												
	K4L	T-20 TORX																																																																																																																																																																																																																																																												
	K5L	T-25TORX																																																																																																																																																																																																																																																												
				L-Style Torx  																																																																																																																																																																																																																																																										

*Angle effective in the holder/bar.



Infeed Values for Threading Operations

External UN Threads --- Recommendations for Steel Workpieces (<300BHN)

TPI	4	5	6	7	8*	9	10	11	12	13	14	16	18	20	24	28	32	36	40	44	48
THREAD DEPTH	.1578	.1262	.1052	.0902	.0789	.0701	.0631	.0574	.0526	.0485	.0451	.0394	.0350	.0315	.0263	.0225	.0197	.0175	.0157	.0143	.0131
# OF PASSES																					
1	.0353	.0298	.0248	.0213	.0197	.0175	.0169	.0157	.0152	.0142	.0136	.0125	.0124	.0119	.0118	.0112	.0098	.0087	.0078	.0073	.0065
2	.0146	.0122	.0105	.0088	.0082	.0073	.0070	.0066	.0064	.0057	.0059	.0054	.0053	.0049	.0048	.0046	.0042	.0036	.0032	.0028	.0027
3	.0113	.0094	.0078	.0077	.0063	.0056	.0053	.0048	.0048	.0044	.0043	.0039	.0039	.0039	.0039	.0036	.0031	.0028	.0028	.0022	.0020
4	.0095	.0079	.0067	.0059	.0053	.0047	.0045	.0041	.0042	.0037	.0036	.0034	.0033	.0032	.0031	.0031	.0026	.0024	.0020	.0020	.0019
5	.0084	.0070	.0058	.0050	.0047	.0042	.0039	.0036	.0036	.0033	.0032	.0029	.0029	.0028	.0027						
6	.0076	.0063	.0052	.0045	.0043	.0037	.0036	.0031	.0032	.0030	.0029	.0026	.0026	.0025							
7	.0070	.0058	.0048	.0041	.0039	.0034	.0031	.0028	.0029	.0027	.0026	.0024	.0024	.0023							
8	.0065	.0054	.0045	.0038	.0036	.0032	.0030	.0026	.0027	.0025	.0024	.0022	.0022								
9	.0061	.0051	.0042	.0036	.0034	.0030	.0029	.0025	.0026	.0024	.0023	.0021									
10	.0057	.0048	.0040	.0034	.0032	.0028	.0028	.0024	.0025	.0023	.0022	.0020									
11	.0054	.0045	.0038	.0032	.0031	.0027	.0027	.0023	.0023	.0022	.0021										
12	.0052	.0043	.0036	.0031	.0029	.0026	.0026	.0022	.0022	.0021											
13	.0049	.0042	.0035	.0030	.0027	.0025	.0025	.0021													
14	.0048	.0041	.0034	.0029	.0026	.0024	.0024	.0020													
15	.0046	.0040	.0033	.0028	.0025	.0023															
16	.0044	.0039	.0032	.0027	.0025	.0022															
17	.0043	.0038	.0031	.0026																	
18	.0042	.0037	.0030	.0025																	
19	.0041																				
20	.0039																				

Infeed Values for Threading Operations





Internal UN Threads --- Recommendations for Steel Workpieces (<300BHN)


TPI	4	5	6	7	8	9	10	11	12	13	14	16	18	20	24	28	32	36	40	44	48
THREAD DEPTH	.1353	.1082	.0902	.0773	.0676	.0601	.0541	.0492	.0451	.0416	.0386	.0338	.0300	.0270	.0225	.0193	.0169	.0150	.0135	.0123	.0112
# OF PASSES																					
1	.0303	.0255	.0213	.0183	.0169	.0150	.0145	.0132	.0131	.0120	.0117	.0107	.0106	.0102	.0101	.0096	.0084	.0075	.0067	.0061	.0056
2	.0125	.0105	.0090	.0076	.0073	.0062	.0064	.0055	.0054	.0050	.0048	.0043	.0044	.0042	.0042	.0039	.0035	.0031	.0029	.0025	.0023
3	.0096	.0083	.0069	.0058	.0053	.0047	.0046	.0044	.0041	.0038	.0037	.0034	.0033	.0032	.0032	.0033	.0027	.0023	.0021	.0019	.0017
4	.0081	.0068	.0057	.0049	.0047	.0040	.0038	.0035	.0035	.0032	.0031	.0028	.0028	.0027	.0027	.0025	.0023	.0021	.0018	.0018	.0011
5	.0071	.0060	.0050	.0043	.0041	.0035	.0034	.0031	.0031	.0028	.0027	.0025	.0025	.0024	.0023						
6	.0064	.0054	.0045	.0039	.0036	.0032	.0031	.0028	.0028	.0025	.0025	.0029	.0023	.0022							
7	.0059	.0050	.0041	.0036	.0033	.0029	.0028	.0026	.0026	.0023	.0023	.0021	.0021	.0021							
8	.055	.0046	.0038	.0033	.0030	.0027	.0026	.0024	.0024	.0022	.0021	.0020	.0029								
9	.0052	.0043	.0036	.0031	.0028	.0025	.0024	.0022	.0022	.0021	.0020	.0019									
10	.0049	.0041	.0034	.0029	.0027	.0024	.0023	.0021	.0021	.0020	.0019	.0018									
11	.0046	.0039	.0032	.0028	.0026	.0023	.0022	.0020	.0020	.0019	.0018										
12	.0044	.0037	.0031	.0027	.0025	.0022	.0021	.0019	.0019	.0018											
13	.0042	.0036	.0030	.0026	.0024	.0021	.0020	.0018													
14	.0041	.0035	.0029	.0025	.0023	.0020	.0019	.0017													
15	.0040	.0034	.0028	.0024	.0022	.0019															
16	.0039	.0033	.0027	.0023	.0021	.0019															
17	.0038	.0032	.0026	.0022																	
18	.0037	.0031	.0025	.0021																	
19	.0036																				
20	.0035																				



Trouble Shooting & Optimizing Tool Life/ Threading Economy

Modern PVD grades and insert geometries have done much to improve the productivity and reliability of thread turning. They have also helped to eliminate or minimize problems in threading. The following chart lists problems, in order of severity, which may still occur in modern threading.


Problem	Cause	Solution
Plastic Deformation  <p>Starts as plastic deformation (1) which leads to plastic break (2)</p>	Excessive temperature in the cutting area Unsuitable grade Inadequate coolant supply	Reduce cutting speed Increase number of infeeds Reduce the largest infeed depth Check diameter before threading Improve coolant supply Choose grade with better resistance to plastic deformation
Built-up Edge/ Edge Spalling  <p>Built-up edge (1) and edge spalling (2) often occur in combination. Built-up edge accumulates and is then ripped away taking insert material with it</p>	Cutting edge temperature too low Stainless material; CMC codes 05.2, 05.51, and 05.52 Low carbon steel Unsuitable grade	Increase cutting speed Choose an insert with good toughness, preferably PVD coated
Insert Breakage 	Wrong Diameter prior to threading operation Infeed series too tough Unsuitable grade Poor chip control Center height incorrect	Turn to correct diameter before threading--0.0012-0.0028 radially larger than maximum diameter for thread Increase number of infeeds Reduce size of the large infeeds Choose a tougher grade Change to "CB" geometry and use modified flank infeed Correct center height
Rapid Flank Wear 	Highly abrasive material Cutting speed too high Infeed depths too shallow Insert is above centerline	Choose a more wear resistant grade Reduce cutting speed Reduce number of infeeds Correct center height
Abnormal Flank Wear Poor Finish on One Flank of Thread	Incorrect method for flank infeed Insert's inclination angle does not agree with thread's lead angle	Change method of infeed Change shim to obtain correct angle of inclination
Vibration	Incorrect clamping work piece Incorrect set-up of the tool Incorrect cutting data Incorrect center height	Use softer jaws Minimize overhang of tool Check that the clamping sleeve for bars is not worn Increase cutting speed; if this does not help lower speed dramatically Use constant infeed series Try "CB" or "HCB" geometry Adjust the center height Use heavy metal, solid carbide or carbide cored bar.
Poor Surface Quality on Thread	Cutting speed too low The insert is above center Uncontrolled chips	Increase cutting speed Adjust center height Use "CB" or "HCB" geometry and modified flank infeed

Problem	Cause	Solution
Poor Chip Control	Incorrect method of infeed Wrong geometry	Modified Flank infeed 3P-5P "CB" or "HCB" geometry with modified flank infeed 1P
Shallow Profile	Wrong center height Insert breakage Excessive wear	Adjust the center height Change cutting edge
Incorrect Thread Profile	Unsuitable thread profile angle of thread and nose radius; external inserts used for internal operation and vice versa Wrong center height Holder not 90° to center line Pitch error in machine	Correct tool / insert combination Adjust the center height Adjust to 90° Correct in machine
Excessive Edge Pressure 	Work hardening material in combination with infeed depths which are too shallow Excessive pressure on cutting edge Profile with too small thread profile angle	Reduce the number of infeeds Change to "CB" or "HCB" geometry Use a tougher grade Use incremental flank infeed

ACME TABLE				
PITCH	REGULAR		STUB	
	WIDTH	DEPTH	WIDTH	DEPTH
16	.0206	.0362	.0238	.0238
14	.0239	.0407	.0276	.0264
12	.0283	.0467	.0326	.0300
10	.0319	.0600	.0370	.0400
9	.0360	.0656	.0417	.0433
8	.0411	.0725	.0476	.0475
7	.0478	.0814	.0551	.0529
6	.0566	.0933	.0652	.0600
5	.0689	.1100	.0793	.0700
4	.0875	.1350	.1004	.0850
3-1/2	.1007	.1529	.1155	.0957
3	.1184	.1767	.1356	.1100
2-1/2	.1431	.2100	.1638	.1300
2	.1802	.2600	.2060	.1600
1-1/2	.2419	.3433	.2764	.2100
1-1/3	.2728	.3850	.3116	.2350
1	.3655	.5100	.4172	.3100



Optional Infeed Angles for Threading Applications




Advantage-
Cutting on both sides of the thread form places all of the cutting edge in the cut and protects edge from chipping.

Disadvantage-
Tool develops a channel chip which may be difficult to handle.

Tip chipping occurs when cutting high-tensile materials.

Burr condition is increased.


Entire cutting edge is engaged at finish of thread, causing increased tendency to chatter.



Advantage-
Cutting with the leading edge of the threading tool gives the chip a definite flow out of the thread form area. This reduces the burr problem on the trailing edge of the tool. To avoid bad surface finish, chipping, or excessive flank wear due to rubbing of the trailing edge, the infeed angle should be 3P to 5P smaller than the angle of the thread. This is a type of modified flank.


Disadvantage-
Trailing edge of threading insert may drag or rub, and tends to chip.

Torn or poor surface finish threads result when cutting soft, gummy materials such as low carbon steels, aluminum, and stainless steels.



Advantage-
Tool cuts both sides of thread form and, therefore, is protected from chipping similar to 0P infeed. Channel-type chip develops but uneven chip thickness helps remove the chip similar to flank infeed.


Disadvantage-
Similar disadvantages as with 0P infeed, although slightly reduced in magnitude as the cutting forces are better equalized and chip flow is much less of a problem.



Advantage-
Increased tool life because both edges are used equally. NOTE: Some machine tools may require special programming techniques to achieve this method.

Disadvantage-
Difficult to cut on conventional machinery.

We welcome specials! Please call us with your specs.

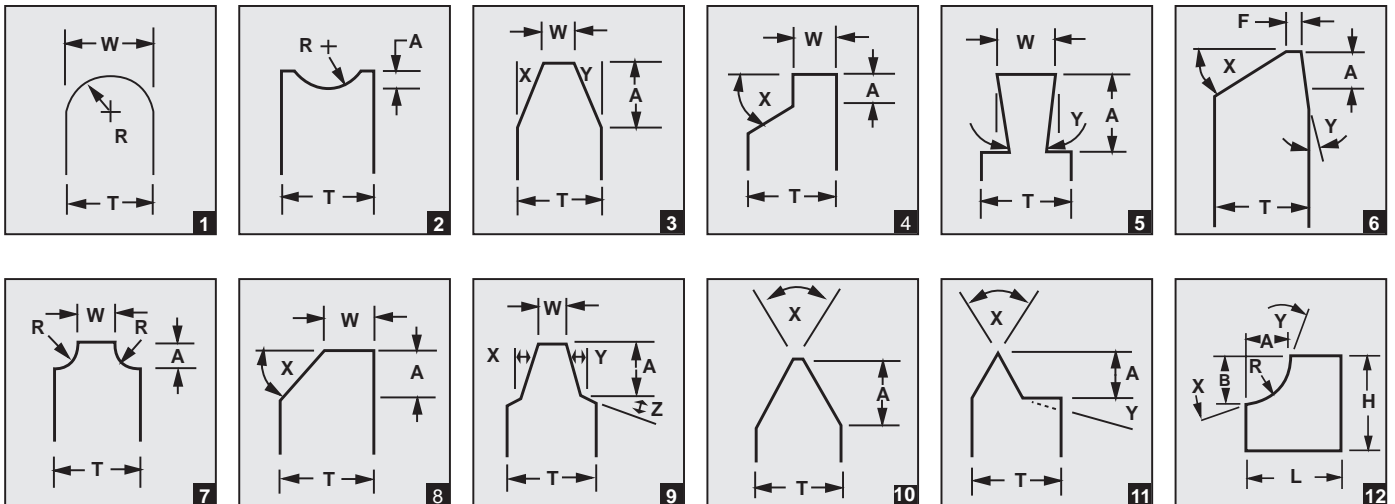



Recommended SFM for Grooving Applications

	Free Machining Carbon Steels	Plain Carbon Steels	Alloy Steels 190-330 HB	Alloy Steels 330-450 HB	Martensitic/Ferritic Stainless Steel 400 Series	Austenitic Stainless 300 Series	Gray Cast Iron 190-330 HB	Gray Cast Iron 330-450 HB	Alloy / Ductile Irons	Free Machining Aluminum Alloys	High-Silicon Aluminum Alloys	Copper / Zinc / Brass	Non-Metallics	High Temperature Alloys 200-260 HB	High Temperature Alloys 260-450 HB	Titanium Alloys (Ti 6Al-4V)	Hardened Materials 48-65 HRC
C22	---	---	---	---	---	150-300	100-350	100-300	---	100-1500	---	100-500	100-1000	80-130	50-100	100-200	---
C25	---	---	---	---	---	200-350	100-375	100-350	---	200-1700	---	200-600	400-1200	80-130	50-100	100-200	---
C26S	---	---	---	---	---	---	---	---	---	1500-3K	---	400-800	400-1200	---	---	---	---
C3	---	---	---	---	---	200-400	100-375	100-350	---	200-2K	---	200-700	400-1400	80-130	50-100	100-200	---
G50	300-700	300-700	300-700	300-600	300-600	---	---	---	300-600	---	---	---	---	---	---	---	---
GP22	150-300	150-300	150-300	150-300	150-300	150-400	150-400	150-350	150-300	150-2K	---	150-700	500-1500	100-175	80-150	100-250	---
GP25	150-300	150-300	150-300	150-300	150-300	150-400	150-400	150-350	150-300	150-2K	---	150-700	500-1500	100-175	80-150	100-250	---
GP26	400-800	400-800	300-600	200-500	300-600	200-500	400-800	300-600	300-600	1200-3500	---	300-8K	300-1200	100-200	100-200	100-250	---
GP3	200-400	200-400	200-400	200-350	200-400	200-500	200-600	200-500	200-100	300-2K	---	200-900	300-1500	100-200	100-175	150-300	---
GP4	60-175	60-175	60-150	60-150	60-150	60-150	60-150	60-150	60-150	60-150	---	---	---	50-80	50-80	50-80	---
GP5	200-500	200-500	200-400	200-400	200-400	---	---	---	200-400	---	---	---	---	---	---	---	---
GP54	200-500	200-500	200-400	200-400	200-400	---	---	---	200-400	---	---	---	---	---	---	---	---
GP50	200-600	200-600	200-500	200-450	200-500	---	---	---	200-500	---	---	---	---	---	---	---	---
AC22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
AC26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
AC3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
AC54	350-500	350-500	350-500	300-500	300-500	---	---	---	300-500	---	---	---	---	---	---	---	---
AC50	400-800	450-800	400-800	400-750	350-700	---	---	---	300-700	---	---	---	---	---	---	---	---
ZA22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
ZA26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
ZA3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
ZA50	400-800	450-800	400-800	400-750	350-700	---	---	---	300-700	---	---	---	---	---	---	---	---
ZL22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
ZL26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
ZL3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
ZR22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
ZR26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
ZR3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
ZR50	400-800	450-800	400-800	400-750	350-700	---	---	---	300-700	---	---	---	---	---	---	---	---
ZS22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
ZS26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
ZS3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
ZS50	400-800	450-800	400-800	400-750	350-700	---	---	---	300-700	---	---	---	---	---	---	---	---
ZU22	250-500	250-500	250-450	250-400	200-450	300-600	300-600	200-550	250-450	600-2200	---	300-900	350-1200	80-200	80-175	80-300	---
ZU26	500-1K	500-1K	400-800	300-600	400-800	300-700	500-1000	400-800	400-800	1500-5K	---	400-1K	400-1500	100-200	100-200	200-300	---
ZU3	250-450	250-450	250-400	250-400	250-450	250-700	300-700	300-600	200-450	600-2500	---	400-1K	400-1500	100-250	100-200	100-300	80-150
ZU50	400-800	450-800	400-800	400-750	350-700	---	---	---	300-700	---	---	---	---	---	---	---	---
GPM6	600-1500	600-1200	500-1100	600-800	500-800	500-1K	400-1100	350-950	350-950	---	---	---	---	---	---	---	---
CB200	---	---	---	---	---	---	400-2500	1K-1800	---	---	---	---	---	300-600	250-450	---	150-350
CB400	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	200-500
PC33	---	---	---	---	---	---	---	---	---	1K-8K	1K-5K	1K-4K	1K-4500	---	---	---	---
DX200	---	---	---	---	---	---	---	---	---	1K-7K	1K-3K	1K-3500	1K-4K	---	---	---	---



Zenith

Grade Description Chart

G50	CVD TiN/TiC/TiN grade. API chaser grade for Q-Series material.
GP22	PVD TiN grade with a tough, micro-grain substrate. Good for threading at low to medium speeds, while capable of handling interruptions. Works well in stainless steel, high-temperature alloys, and standard steels at low to medium SFM.
GP25	PVD TiN grade for non-ferrous materials.
GP26	PVD TiN grade with a tough, micro-grain, unalloyed substrate. Rigid-Lok endmill grade. Good choice for steels, stainless, high-temperature alloys, and non-ferrous materials. Good in low to high SFM, will handle interruptions and high feed rates.
GP3	PVD TiN grade with a wear resistant micro-grain substrate. Excellent choice in stainless steels, high-temperature alloys, aerospace materials, and non-ferrous materials. Good in standard steels at low to medium SFM.
GP4	PVD TiN grade with our toughest substrate. First choice at low SFM (50-150) applications and heavy interruptions. Used in all applications where tool breakage is an issue.
GP54	PVD TiN grade with a tough substrate.
GP5	PVD TiN grade with a medium tough substrate. Good general purpose grade for steel applications. Primary grade in LPGC and TPGC style inserts.
GP50	PVD TiN grade with a medium tough substrate and excellent wear properties. Great general purpose grade for steel applications.
AC22	PVD TiAlN grade with a tough, micro-grain substrate. First choice in Laydown Threading in all materials. Dry machining capable.
AC26	PVD TiAlN grade with a tough, fine grain, unalloyed substrate with excellent wear properties. First choice in Rigid-Lok inserts for steels, stainless, high-temp alloys, and non-ferrous materials. Performs very well at low to high SFM and will handle interruptions and high feed rates. Coating provides highest resistance to oxidation, physical abrasion, and chip welding. Dry machining capable.
AC3	PVD TiAlN grade. First choice for grooving and threading in stainless steel, high-temperature alloys, aerospace materials, and non-ferrous materials. Excellent in standard steels at medium SFM. Dry machining capable.
AC50	PVD TiAlN grade. First choice for grooving and threading in all standard steels and 400 series stainless. Application range is medium to high SFM. Dry machining capable.
ZA22	PVD TiAlN grade with a tough, micro-grain substrate. Dry machining capable.
ZA26	PVD TiAlN grade with a tough, fine grain, unalloyed substrate with excellent wear properties. First choice in Rigid-Lok inserts for steels, stainless, high-temp alloys, and non-ferrous materials. Performs very well at low to high SFM and will handle interruptions and high feed rates. Coating provides highest resistance to oxidation, physical abrasion, and chip welding. Dry machining capable.
ZA3	PVD TiAlN grade. First choice for grooving in stainless steel, high-temperature alloys, aerospace materials, and non-ferrous materials. Excellent in standard steels at medium SFM. Dry machining capable.
ZA50	PVD TiAlN grade. First choice for grooving and threading in all standard steels and 400 series stainless. Application range is medium to high SFM. Dry machining capable.
ZS22	PVD AlTiN grade with a tough, micro-grain substrate. Good in Laydown Threading in all materials. Dry machining capable.
ZS26	PVD AlTiN grade with extra lubricity, a tough, fine grain, unalloyed substrate with excellent wear properties. First choice in Rigid-Lok inserts for steels, stainless, high-temp alloys, and non-ferrous materials. Performs very well at low to high SFM and will handle interruptions and high feed rates. Coating provides highest resistance to oxidation, physical abrasion, and chip welding. Dry machining capable.
ZS3	PVD AlTiN grade for grooving and threading in stainless steel, high-temperature alloys, aerospace materials, and non-ferrous materials. Excellent in standard steels at medium SFM. Dry machining capable.
ZS50	PVD AlTiN grade for grooving and threading in all standard steels and 400 series stainless. Application range is medium to high SFM. Dry machining capable.
ZL22	PVD grade with a tough, micro-grain, unalloyed substrate. Good for turning at low to medium speeds, while capable of handling interruptions. Works well in high-temperature alloys and aluminum.
ZL26	PVD grade with a tough, micro-grain, unalloyed substrate. Rigid-Lok endmill grade. Good choice for aluminum, high-temperature alloys, and non-ferrous materials. Good in low to high SFM, will handle interruptions and high feed rates.
ZL3	PVD grade with a wear resistant micro-grain substrate. Excellent choice in high-temperature alloys, aerospace materials, and non-ferrous materials.



ZR22	PVD AlTiN grade with a tough, micro-grain, unalloyed substrate. Good for threading at low to medium speeds, while capable of handling interruptions. Works well in stainless steel, high-temperature alloys, and standard steels at low to medium SFM.
ZR26	PVD AlTiN grade with a tough, micro-grain, unalloyed substrate. Rigid-Lok endmill grade. Good choice for steels, stainless, high-temperature alloys, and non-ferrous materials. Good in low to high SFM, will handle interruptions and high feed rates
ZR3	PVD AlTiN grade with a wear resistant micro-grain substrate. Excellent choice in stainless steels, high-temperature alloys, aerospace materials, and non-ferrous materials. Good in standard steels at low to medium SFM.
ZR50	PVD AlTiN grade with a medium tough substrate and excellent wear properties. Great general purpose grade for steel applications.
ZU22	PVD AlTiN grade with a tough, micro-grain, unalloyed substrate. Good for threading at low to medium speeds, while capable of handling interruptions. Works well in stainless steel, high-temperature alloys, and standard steels at low to medium SFM.
ZU26	PVD AlTiN grade with a tough, micro-grain, unalloyed substrate. Rigid-Lok endmill grade. Good choice for steels, stainless, high-temperature alloys, and non-ferrous materials. Good in low to high SFM, will handle interruptions and high feed rates.
ZU3	PVD AlTiN grade with a wear resistant micro-grain substrate. Excellent choice in stainless steels, high-temperature alloys, aerospace materials, and non-ferrous materials. Good in standard steels at low to medium SFM.
ZU50	PVD AlTiN grade with a medium tough substrate and excellent wear properties. Great general purpose grade for steel applications.
C22	Uncoated grade with a tough, micro-grain, unalloyed substrate. Good for threading at low to medium speeds, while capable of handling interruptions. Works well in stainless steel, high-temperature alloys, and standard steels at low to medium SFM.
C25	Uncoated general purpose C2 grade. Good for all non-ferrous materials.
C26S	Uncoated grade with a tough, fine grain, unalloyed substrate. Main uncoated grade for Rigid-lock endmill inserts. Edge is up-sharp for use in non-ferrous and composite applications.
C3	Uncoated micro-grain C3 grade. Good for all non-ferrous, stainless steel, and nickel-based alloys.
GPM6	PVD TiN coated cermet grade. First choice for grooving in high-speed finishing of most carbon, alloy, and stainless steels. Performs very well in cast and ductile irons. Provides excellent workpiece finishes.
CB200	PCBN tip brazed onto a carbide insert. High content CBN. First choice for cast iron and high-temperature alloys. Suited for roughing to finishing in hardened steels greater than 45 HRC, such as bearing steel, hot and cold work tool steels, high-speed steels, die steels, case hardened steels, nitrided irons, and some hard coatings.
CB400	PCBN tip brazed onto a carbide insert. Low content CBN. First choice for roughing to finishing of hardened steels 45 HRC and higher. Use on bearing steel, hot and cold work steels, die steels, case hardened steels, carburized and nitrided irons.
CB410	PCBN tip brazed onto a carbide insert. Low content CBN. First choice for roughing to finishing of hardened steels 45 HRC and higher. Use on bearing steel, hot and cold work steels, die steels, case hardened steels, carburized and nitrided irons.
PC33	PCD tip brazed onto a carbide insert. First choice for high silicone aluminum applications at high SFM. Use on all types of highly abrasive materials including non-ferrous metals and non-metallics. High SFM only!
DX200	PCD CVD coated grade. Rigid-Lok insert grade. First choice at high SFM in non-metallic materials such as graphite, epoxy based resins, plastics, and aluminum.

*For premium performance based upon optimal machining conditions, select the grade that will provide you with the highest allowable SFM for the material that is being machined. Optimum grades are in bold print. Grades are specific to certain insert styles. The grades listed below in bold print are stock within the style listed, see appropriate catalog page for precise stocking status.

Bantam: C22 GP22 GP4 AC22	Flo-Lock: C25 GP4 GP3 GP4 GP5 GP50 AC22 AC3 AC50 GPM6 CB200 CB400 PC33 C22 C3	Laydown: GP22 GP3 GP5 GP50 AC22 AC50 C22	Threadmill: C3 GP3 GP22
Ballnose: C26 ZS26 CB400 DX200	AC50 GPM6 CB200 CB400 PC33 C22 C3	Milling: GP5 C5H	Turning: G525 (Negative) AG525 AG535 AG615
Chasers: G50 GP50 AC50 ZA50	Laydown: GP22 (LT style) GP4 GP50 AC22 AC50 C22	On Edge: GP22 GP3 GP54 GP50 GPM6 AC22 AC3 AC50 AC54 C22 C25 C3	Turning: AC3 (Positive) AC50 C3
Cutoff: GP22 AC22 AC50 C22			V-Bottom: GP3 (V84/V85) GP50 AC50 C3
			V-Bottom: C3 (VDB/VDG) GP3 AC3 AC50 CB200 CB400 PC33



ORDERING INFORMATION

CONDITION OF SALE

Sales are made in accordance with our standard Conditions of Sale current at the time orders are accepted. Specifications and prices subject to change without notice.

QUOTATIONS

Will be subject to acceptance 60 days from the date of quotation unless otherwise agreed. **In order to receive special quoted pricing, a quote number must be referenced at the time the order is placed.**

TERMS OF PAYMENT

Net 30 Days

DELIVERY TERMS

F.O.B. Shipping point; Charges will be added to invoice.

WARRANTY

We will replace any material which is proven defective within 90 days from date of shipment to the customer. No claim for labor or damage will be allowed. Claims for error must be made upon receipt of material.

PRICING

So far as the resale of items in this price list is concerned, the prices referred to are to be regarded as suggested only. The distributor, in its sole discretion, determines the actual resale price. These suggested resale prices are based on quantities of identical items released by purchaser on one order for shipment at one time to one destination. The reseller should determine whether savings in cost can justify the suggested quantity price differential, as may be required by the Robinson-Patman Act or other applicable law.

OVER AND UNDER SHIPMENTS

For Non-Stock or Special items, unless otherwise specified or agreed, the following over and under allowances may be made:

Lots of	10-19	20-49	50-99	100+
Over/Under	1 piece	2 pieces	3 pieces	5%

MINIMUM ORDER

\$50 Net per order. For Extended Discount Program - \$100 Net per order.

RETURNS

Each Distributor will be allowed at a certain time of year to exchange 1% of their Net Sales for the previous year up to a maximum of \$1,000. These exchanges will be limited to Stock Standard items only and will be replaced by such. The exchange schedule is as follows:

Group A Distributors:	January - March
Group B Distributors:	July - September
Group C Distributors:	April - June
Group D Distributors:	October - December

All Non-Stock and Specials are non-returnable and/or non-exchangeable.

A Returned Material Authorization (RMA) number must be assigned by Tool-Flo prior to any material being returned. Purchase Order numbers and original invoice numbers must be supplied before an RMA number can be issued.

RELEASE ORDER POLICY

- A. Prices are to be based on total quantity of each item. Prices will be firm for six (6) months from the date of purchase. In the event of a price increase during the term of the order, one of the following conditions will apply:
- If the increase becomes effective during the first six (6) months of the order, the balance of the order can be released within six (6) months from the date of purchase at existing prices. Any subsequent releases will be invoiced at the new price.
 - If the increase becomes effective after the first six (6) months of the order, the balance can be released immediately upon notification of the price increase at existing prices. All items not released immediately will be invoiced at the new price.
- B. Minimum release order is 400 pieces. Releases must be made every 30 days. Initial release must be made within 30 days of order date. Minimum release is 50 pieces every 30 days. Releases not to exceed twelve (12) months. At the end of the twelve (12) month period from the date of the order, any remaining pieces will be shipped.



INDEX



11.....	119,120,122,124	CNMM	184	FLVLCL/R	169	SI-SDUCL/R	201
16.....	10-13, 115-125	COAHL/R.....	76	FLVVCN.....	170	SI-STFCL/R	201
22.....	10-13, 115-117, 119-122	CODVOL/R.....	75	FSBI.....	50	SI-STHOL/R	157
27.....	11-13, 115-117, 119-122	CPGM.....	168	GC	213	SI-STUCL/R	202
A-FLDLPL.....	171	CR	6,7,66-68	GR	213	SNGA.....	162
A-FLDLPR	171	CSBI	49	GTB.....	157	SNMG.....	185
A-FLEL	109	DBP	212	H-FLER3.....	22,111	SPG	143
A-FLELT	82,110	DBV	34	IDR	26	SPUB.....	26
A-FLER.....	109	DGAHL/R.....	80	L43.....	14,15,129-135	SQ86	26
A-FLERT.....	82,110	DGCHL/R	80	L53.....	14,15,17,129-135	STCNR	33
A-FLKLCL.....	172	DNGA	161,162	LDS.....	14-17,131-134	STVOL/R	156,157
A-FLKLCR	172	DNMG.....	184	LFL/R.....	137	TAL/R	196
A-FLKQCL	172	DPGR	168	LN	135	TBDC	42
A-FLKQCR	172	FC.....	72	LNCX.....	142	TBDI	42,43
A-FLKXCL	172	FCBI	50	LNE.....	142	TBDS	42,43
A-FLKXCR	172	FCEDVOR.....	73	LNFL/R	137,138	TBFI.....	42,43
A-FLSL/R.....	86	FCIVOR.....	72	LNTL/R	138	TBNR	37,39
A-FLVLCL.....	172	FCVOR	72,73	LPGC.....	130,135	TBRR.....	37,40
A-FLVLCR	172	FGNR	22	LTL/R	138	TBNC.....	38-41
A-MFLEL/R.....	109	FLA.....	100,101	MCFNL/R.....	187	TBNS.....	38-41
AFHL/R.....	87	FLAS.....	100,101	MCGNL/R.....	187	TBXR	37,39
AL	64,125	FLASL/R.....	63,108,109	MCKNL/R.....	187	TCMT.....	186
APKT	142	FLD	8,102	MCLNL/R	188	TCOHAL/R	75
APIP	21	FLDC	8,9,102-104	MCMNN.....	188	TCOHL/R.....	75
AVR	126	FLDLPL	169	MCRNL/R.....	188	TCN	177
B10	27,28	FLDLPR.....	169	MDJNL/R.....	189	TCP	180
B12	28	FLDPPN	170	MDPNN	189	TCS	180
B6	28	FLEL	85,108	MLPE.....	219	TCT.....	175
B64	28	FLELT	81,110	MRGNL/R.....	189	TD.....	7,67,68
B8	27,28	FLER	85,108	MS-CLHOL/R.....	220	TDAB.....	50
B85	28	FLERT	81,110	MSDNN	190	TDCG	50
B86	28	FLF	84,96	MSKNL/R.....	190	TE	197
BB.....	51,54,58	FLF-CB.....	84,96	MSRNL/R.....	191	TFHD.....	34
BBC	61	FLFD.....	84	MSSNL/R.....	191	TFL/R.....	74,197
BFR (3).....	51,53,57	FLFD-CB	84,97	MTANL/R.....	192	TFM.....	143,181
BFR (4).....	52,55,59	FLFD-I	86	MTCNN.....	192	TFMG	143,181
BFR3	51,53,57	FLFD-I-CB	86,97	MTENNS	192	TFN.....	74
BFR4	52,55,59	FLFT	85,98	MTENR.....	136	TGL/R.....	197
BHR	56,60	FLG.....	93,94,165	MTFNL/R.....	192	TI1N.....	174,178,179
BHR4	60	FLG-CB	33,91,92	MTGNL/R.....	192	TI1P.....	174-177
BHV	56	FLGD	96	MTHOL/R.....	156	TI15N.....	177-179
BNBR.....	51	FLGD-CB.....	96	MTJNL/R.....	193	TI75P	174-176
BNGR	54,61	FLGP	94	MTLNL/R.....	193	TNEB.....	152,154
BNPR.....	51	FLGT	80,98,104	MTRNL/R.....	194	TNFA.....	17,134
BNRR	54	FLJ.....	104	MTVNL/R.....	136	TNGA.....	163
BNVR.....	58,61	FLJF	104	MTVOL/R.....	156	TNMA.....	18,19,146-152,154,155
BSBR.....	50	FLJK	105	MTWNL/R.....	194	TNMC	18,19,146-155
BSGR	53	FLJP	104	MVJNL/R.....	194	TNMG.....	185
BSR	50,53,56	FLKLCL/R.....	170	MVLNL/R.....	195	TNPGC.....	135
BSVR.....	56	FLKLCLF/RF	63,171	MVNNL/R.....	195	TPCB.....	52
BTBL.....	53	FLKPCN	171	MVTNL/R.....	195	TPCG.....	52
BTBR.....	53	FLPGL/R.....	168	MWLN/R.....	195	TPG	143
BTGL.....	55	FLPL/R	168	NVR	126	TPGC.....	130,131,135
BTGR.....	55	FLR	95,165	PCFNR	68	TPMA.....	146,148,153,155
BTL.....	53,55,60	FLR-CB.....	95	PV.....	32	TPMC	147,148,154,155
BTR	53,55,60	FLRD	96	QCBI.....	52	TSSI.....	180
BTRL.....	53	FLRL.....	109	QSBI.....	52	TSSX	180
BTRR.....	55	FLRP	95	RAL/R.....	196	V120	210,214
BTVL.....	60	FLRR	109	SBL/R	196	V84	20,21,210-212,214,215
BTVR.....	60	FLRT.....	80,98	SEKN.....	143	V85	20,21,210-212,214,215
CCBI	49	FLSL	85,107,108	SI-CDHOR	217,218	V96	210,214
CCMT	186	FLSLT	81,85	SI-CLHOR	69	V98	214
CDCD	49	FLSR	85,107,108	SI-MCLNL/R	198	VCMT	186
CDCG.....	49	FLSRT	81,85,110	SI-MDJNL/R	198	VDB	86,165,213,214
CDE.....	142	FLT	106	SI-MSKNL/R.....	198	VDB-CB	86,214
CDHOL/R	87,215,216	FLT-CB	106	SI-MTFNL/R.....	199	VDG.....	78,79
CDVOC.....	87,217,218	FLTB	102	SI-MTHOL/R.....	157	VNGA.....	164
CDVOL/R.....	73,215-218	FLTC	105	SI-MVJNL/R.....	199	VNMG.....	185
CEDVOL/R	79	FLTF	106	SI-MVLNL/R.....	199	VPGR	169
CHLFR.....	87	FLTK	106	SI-MVPNL/R.....	200	WNMG.....	185
CLVOR	68	FLTP	107	SI-MWLN/R.....	200		
CNGA.....	61,66,161	FLU.....	107	SI-SCFCL/R.....	200		
CNMG.....	184	FLV.....	33,107	SI-SCLCL/R.....	201		



	Carboloy®	Iscar®	Kennametal®	Sandvik®	Teledyne	Valenite®	Vardex®
GFI			K1				
GP4						V1N	
AC4							
C22							
GP22	CP50	IC908	KC722	GC1020		VC927	
AC22	CP500						
GP222							
AC222							
C25	HX	IC20	K68		HTA		VK2
GP25					TP21		
AC25							
C26S							
GP26							
AC26							
C2	883	IC20					
GP2							
AC2							
C3			K313	H13A			
GP3			KC730				VKX
AC3			KC5025				VTX
GP50	CP30	IC250	KC810/KC850	225G		VN8	
AC50	CP300		KC5025	225G			VSX
AG50	560		KC950				
G50							
C5H	P30		K420	S4			
GP5			KC710/KC810	GC135		VN5	
AC5							
C6H	S10M	IC50M		SM			V30
GP6	550	IC656				VN8	
AC6							VSX
M6		IC20N	KT175		SD5	VC671	VX5
GPM6			KT315				
M3							
CB200			KD120			VC722	
CB400			KD050	CB20		VC734	
DX200							
PC33			KD100			VC727	

The Source For All Your Cutting Tool Needs! 35 Years!

Call us toll free: 1-800-345-2815



Tool-Flo Manufacturing Inc.
7803 Hansen Road
Houston, TX 77061
Phone: (713) 941-1080, (800) 345-2815
Fax: (713) 941-8099 (800) 342-0992

Customer Service:

(800) 345-2815
Fax: (800) 342-0992